



Holmes Products (Europe) Ltd
1 Francis Grove
London SW19 4DT
England

Fax: +44 (0)20 8947 8272
Email: info-europe@theholmesgroup.com
UK - Filter Sales Order Line - 0870 759 9000
Website address: www.theholmesgroup.com/europe
UK - Free phone Customer Service Helpline - 0800 052 3615

Holmes Products France
1015, Rue du Maréchal Juin
Z.I Vaux - Le - Pénil
77000 Melun - France
Phone: +33 1 64 10 45 80
Fax: +33 1 64 10 02 32

FRANCE - SERVICE CONSOMMATEURS

☎ N° Indigo 0 825 85 85 82

Belgium	+32 38 70 86 86
Czech Republic	+420 48 513 03 03
Denmark	+45 45 93 43 73
Finland	+358 98 70 870
Greece	+30 2 10 61 56 400
Hungary	+36 72 482 017
Netherlands	+31 793 41 77 71
Norway	+47 51 66 99 00
Poland	+48 22 847 8968
Russia	+7 095 334 82 21
Spain	+34 91 64 27 020
Sweden	+46 31 29 09 80



BCM3600I/IUK04M1

BIONAIRE™

Cool Mist
Humidifier

BCM3600







INSTRUCTION MANUAL
MANUEL D'UTILISATION
BENUTZERHANDBUCH
MANUAL DE INSTRUCCIONES
HANDLEIDING
BRUKSANVISNING
KÄYTTÄJÄN OHJEKIRJA


BRUKSANVISNING
BRUGSANVISNING
INSTRUKCJA
ΕΓΧΕΙΡΙΔΙΟ ΟΔΗΓΙΩΝ ΧΡΗΣΗΣ
RYKOBODSTVO
HASZNÁLATI UTASÍTÁS
NÁVOD K OBSLUZE

English	2
Français/French	6
Deutsch/German	11
Nederlands/Dutch	16
Suomi/Finnish	20
Norsk/Norwegian	24
Dansk/Danish	29
Svenska/Swedish	33
Español/Spanish	37
РУССКОЕ/Russian	42
Magyar/Hungarian	47
Česky/Czech	52
ΕΛΛΗΝΙΚΑ/Greek	56
Polski/Polish	61

BCM3600

FIGURE 1

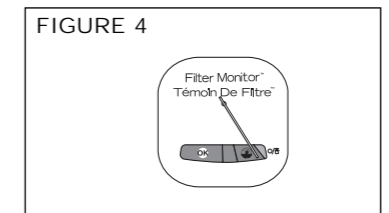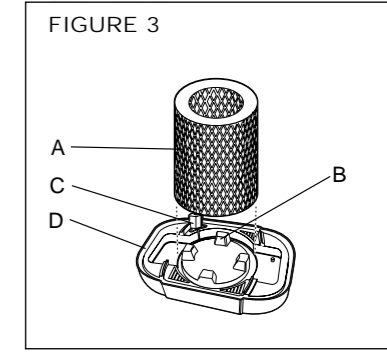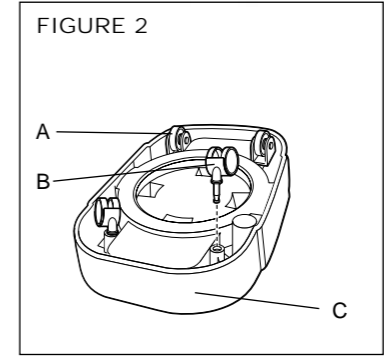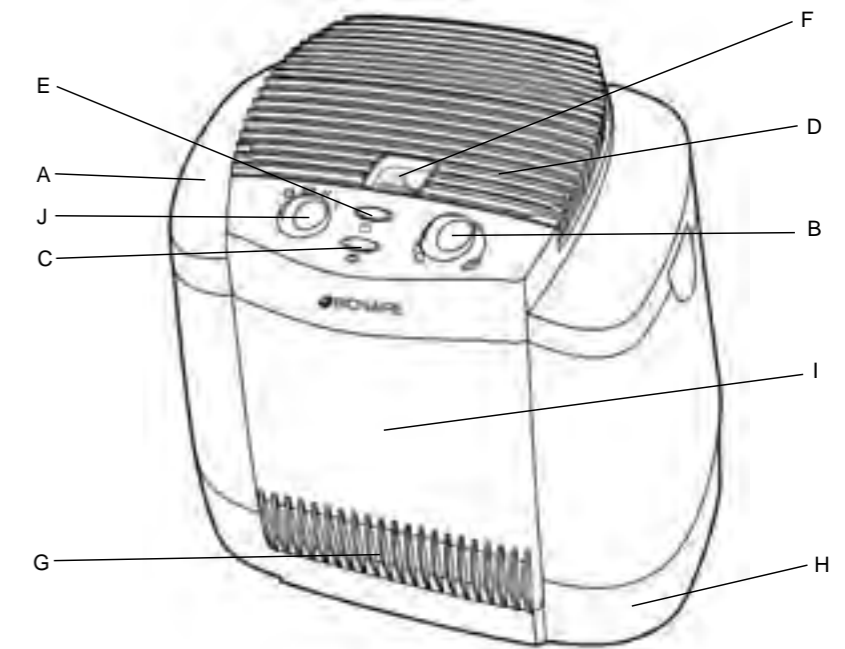



U.K. and IRELAND

CONGRATULATIONS

By choosing a Bionaire™ humidifier, you have chosen one of the finest humidifiers on the market today.

PLEASE READ AND SAVE THESE IMPORTANT INSTRUCTIONS.

NOTE: Before reading these instructions, please refer to the corresponding illustrations

DESCRIPTIONS (SEE FIG 1)

- A. Water Tanks
- B. Humidistat
- C. Refill Light
- D. Moisture Exhaust Grills
- E. Power Light
- F. Filter Monitor™ Indicator
- G. Air Intake Grills
- H. Humidifier Base
- I. Humidifier Housing
- J. Control Knob

WHEEL INSTALLATION (FIG. 2)

- A. Stationary Wheels
- B. Swivel Wheels
- C. Under-Side of Humidifier Base

FIG. 3

- A. Circular Extended Life Filter
- B. Circular Filter Support
- C. Float Switch
- D. Humidifier Base

SAFETY PRECAUTIONS

When using electrical appliances, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and injury to persons, including the following:

- Read all instructions before using the appliance.
- To avoid fire or shock hazard, plug the appliance directly into an electrical outlet and fully insert the plug.
- Keep the cord out of heavy traffic areas. To avoid fire hazard, NEVER put the cord under rugs, or near radiator, stoves, or heaters.
- DO NOT place humidifier near heat sources such as stoves, radiators, and heaters. Do locate your humidifier on an inside wall near an electrical outlet. The humidifier should be at least 10cm/4" away from the wall for best results.
- **WARNING:** Do not attempt to refill humidifier without first unplugging the unit from its electrical outlet. Be sure to pull by the plug

and not the cord.

- NEVER drop or insert any object into any openings. DO NOT place hands, face, or body directly over or near Moisture Outlet while unit is in operation. DO NOT cover Moisture Outlet or place anything over it while the unit is operating.
- DO NOT operate any appliance with a damaged cord or plug, after the appliance malfunctions, or if it has been dropped or damaged in any manner. Return appliance to manufacturer for examination, electrical or mechanical adjustment, or repair.
- Use appliance only for intended household use as described in this manual. Any other use not recommended by the manufacturer may cause fire, electric shock, or injury to persons. The use of attachments not recommended or sold by The Holmes Group, may cause hazards.
- DO NOT use outdoors.
- Always place humidifier on a firm, flat, level surface. A waterproof mat or pad is recommended for under the humidifier. NEVER place it on a surface that may become damaged by exposure to water and moisture (i.e. finished floor).
- DO NOT allow the Moisture Outlet to directly face the wall. Moisture could cause damage, particularly to wallpaper.
- Humidifier should be unplugged when not in use.
- NEVER tilt, move, or attempt to empty unit while it is operating. Shut off and unplug before removing the water tank and moving the unit. DO NOT attempt to remove the water tank within 15 minutes after the humidifier is turned off and unplugged. Serious injury may result.
- This humidifier requires regular maintenance to operate appropriately. Refer to cleaning and maintenance procedures.
- NEVER use detergents, petrol, glass cleaner, furniture polish, paint thinner, or other household solvents to clean any part of the humidifier.
- Excessive humidity in a room can cause water condensation on windows and some furniture. If this happens, turn the humidifier OFF.
- Do not use humidifier in an area where humidity level is in excess of 55%.
- DO NOT attempt to repair or adjust any electrical or mechanical functions on this unit. The inside of the unit contains no user serviceable parts. All servicing should be performed by qualified personnel only.
- If the supply cord is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person.

PLEASE SAVE THESE INSTRUCTIONS

Please note that this is an electrical appliance, and requires attention when in use.

HOW YOUR COOL MIST HUMIDIFIER WORKS

Your Bionaire™ Cool Mist humidifier draws dry air through the rear air intake grill area. This air is then passed through a moisture-laden wick filter, which retains the minerals and deposits in the water. The resulting moist air is directed back into the room from the top air grill.

NOTE: This humidification system provides a cool, invisible moisture output. It is normal not to see the mist.

NOTE: A humidity level below 20% can be unhealthy and uncomfortable. The recommended humidity level is between 40%-50%.

PRE-OPERATING INSTRUCTIONS

1. Be sure the Control Knob is in the OFF position and the unit is disconnected from the electrical outlet.
2. Remove housing, filter and tanks.
3. TO PROVIDE ADDITIONAL MOBILITY AND CONVENIENCE TO YOUR CONSOLE HUMIDIFIER, install the wheels. Remove the four wheels located in a small pouch in the box. Turn the base upside down, and locate the holes at each of the four corners on the underside. NOTE: You will notice that there are two different shaped wheels. Two of the 4 wheels are stationary wheels and two are swivel type wheels. The stationary wheels are identified by a flat top surface, while the swivel type are curved and include a small plastic piece on the shaft. See figure 2 for installation location for each type of wheel. DO NOT use any tools to install the wheel because tools may damage the base of the unit. Return the base to the upright position.
4. Replace filter, housing and tanks.
5. Choose a location out of reach of children. DO NOT place the humidifier on a finished floor or near furniture which can be damaged by moisture or water.

Filling the Water Tank

NOTE: This humidifier holds about 13 litres of water in the tank and humidifier base. The humidifier will produce up to 34 litres of moisture over a 24-hour period.

1. Remove the two tanks from the base of the humidifier and bring each tank to the faucet. Turn the tanks upside down and twist off the tank caps by turning counter-clockwise.

Fill each tank with cool, fresh tap water.

Replace the cap on each tank FIRMLY.

2. When full, carry each tank to the humidifier and place onto the base (use both hands when carrying each tank). Each tank holds 6 litres of water, and the base holds 0.9 litre of water.
3. Plug the power cord into the electrical outlet.

OPERATING INSTRUCTIONS


With housing placed properly onto the base, the filter installed correctly, the tanks filled and the plug correctly inserted in the outlet, you are now ready to operate the humidifier.

NOTE: The BCM3600 produces clean, cool, INVISIBLE moisture. It is normal not to see the moisture.

1. Turn the Control Knob to the HI position and turn the Humidistat to HI.
2. Allow up to 30 minutes for the filter to fully absorb water and the unit to produce the maximum moisture output.
3. Adjust the 3-speed Humidity Control Knob and the Humidistat as desired.
4. The Automatic Humidistat Control is designed to operate between 25% and 60% Relative Humidity range. The recommended setting is between 40% and 50%. When the humidity level in the room is below the level you have set, the humidifier will operate to produce moisture. When the set humidity level in the room is reached, the humidifier will stop. When the humidity again drops below the set level, the unit will automatically start and produce moisture again.

NOTE: We recommend the use of the hygrometer which reads the actual humidity level in your room. A humidity level below 20% can be unhealthy and uncomfortable. The recommended humidity level is between 40% and 50%.

5. When the water level is low, the refill light will illuminate to indicate the unit needs refilling. Shut off and unplug the unit. NOTE: THE FAN WILL CONTINUE TO RUN TO ALLOW THE HUMIDIFIER TO DRY OUT AND PREVENT ALGAE GROWTH.
6. Before refilling, follow Daily Maintenance Instructions and check to see if the filter needs replacing by comparing it to the Color-Coded Filter Monitor (located on the side of the humidifier housing) with the filter wear.
7. Refill water tanks.
8. Plug into the electrical outlet. Turn the Humidity Control Knob to the HI (III), MED (II), or LOW (I) setting. NOTE: If moisture forms on the walls or windows, turn off the humidifier.



USING THE HUMIDISTAT

The Humidistat feature allows you to set and maintain the humidity level you wish for your room to maintain. The Humidistat setting is designed to operate between 25% and 65% relative humidity range. The recommended setting is 40-50%.

Turn the Humidistat clockwise as far as it will turn to achieve the highest setting. In this setting, the humidifier will run constantly, and produce the greatest amount of moisture.

To lower your desired humidity level, simply turn the Humidistat counterclockwise to choose your setting.

When the humidity in the room is less than the level you have set, the humidifier will continue to produce moisture. Once the set humidity level has been achieved, the fan will turn off. When the room humidity drops below your set level, the unit will automatically begin producing moisture again.

Depending on the size of your room and your personal comfort, you will set your humidistat at different levels. If condensation forms on your windows or walls, or your measured room humidity reads above 50% by use of a hygrometer, turn off your humidifier, or lower your Humidistat level.

REPLACING THE FILTER

Through normal use, waterborne minerals and sediment become trapped in the wick filter. The harder your water, the greater the amount of minerals in the water, and the more often you will need to change your filter.

You will be able to monitor the life of the filter in your humidifier by checking the Filter Monitor Indicator. When the unit is off, the Filter Monitor Indicator will read in the O position. After 60 minutes of use, Filter Monitor Indicator (refer to fig. 4 for close-up of indicator) will move from the O position and indicate your filter condition.

A brand new filter will register in the blue section reading OK filter. After frequent use of your humidifier, the Filter Monitor Indicator will let you know when the filter needs to be changed.

When the needle is in the red (☹) section, this means the proper amount of moisture is not getting into your air due to the excessive minerals and sediment that have become trapped on your filter. At this point, you should replace your filter. It is important to change your filter as indicated to obtain stated performance level.

To replace the filter, follow the steps below.

1. Be sure the Control Knob is in the OFF position and the unit is disconnected from the electrical outlet.
2. Remove the tank and main housing to access the base tray.

3. Discard the old filter and follow weekly cleaning instructions.

4. Insert a new filter into the filter support in the base.

5. Replace the main housing and then the tank.

6. Repeat Operating Instruction steps.

It will take about 30 minutes for the humidifier to reach maximum output.

You can obtain a new filter by calling **0870 759 9000 (in UK)**. This humidifier takes model BWF75-I replacement filter.

CLEANING AND MAINTENANCE INSTRUCTIONS

Humidifiers provide comfort by adding moisture to dry, heated indoor air.

To benefit most from the humidifier and avoid product mis-use, follow all instructions carefully. Please note that this is an electrical appliance and requires attention when in use.

In addition, if you do not follow the recommended care and maintenance guidelines, micro-organisms may be able to grow in the water within the Water Tank. You must routinely follow the cleaning procedures that follow in order to ensure proper, efficient operation of your humidifier. Proper maintenance and cleaning is essential to the continued performance of your unit and the avoidance of algae or bacteria build-up.

DAILY MAINTENANCE

1. Before cleaning, turn the Control Knob off and unplug the unit from the electrical outlet.
2. Remove the housing and the tanks from the humidifier and place them in sink or tub.
3. Carry the base of the unit to the sink, remove the wick filter, place in sink, drain any remaining water and rinse thoroughly to remove any sediment or dirt. Wipe clean, and dry with a clean cloth or paper towel.
4. Drain the water from the tanks into the sink and rinse each tank thoroughly. Wipe clean, and dry with a clean cloth or paper towel.
5. Put filter back in the filter supports, replace the housing, then refill the tanks with cool tap water as instructed earlier in the Filling Instructions. Do not overfill.
6. Follow Operating Instructions.

WEEKLY MAINTENANCE

To Remove Scale:

1. Repeat steps 1-4 above.
2. Partially fill the base with Bionaire™ Cleaning Solution as instructed on bottle, or with two 8 oz. cups of undiluted white vinegar. Leave this solution in the base for 20 minutes, while cleaning all interior surfaces with a soft brush.

Remove base scale by wiping the base with a cloth dampened with undiluted white vinegar.

3. Rinse with clean warm water to remove the cleaning solution before disinfecting the tank.

To Disinfect Humidifier Base Tanks

1. Fill Humidifier Base with 2 gallons of water and 1/2 teaspoon of chlorine bleach.
2. Fill each tank 1/2 full with water and 1 teaspoon of chlorine bleach.
3. Let the solution stand for 20 minutes, swishing every few minutes. Wet all surfaces.
4. Carefully empty the Base and Tanks after 20 minutes, and rinse with water until you cannot detect any bleach smell. Dry with a clean cloth or paper towel.
5. Check the Filter Monitor Indicator to see if it is time to replace the filter. Depending on the water hardness in your area, it may be necessary to change the filter every 1-2 months. Re-insert the wick filter into the filter support.
6. Refill the water tanks as directed with cool tap water, replace the humidifier housing, and turn the Control Knob to ON.

If not available follow these instructions

1. Repeat steps 1-3 in the Maintenance section.
2. Clean the tray by partially filling the tray with 200ml of undiluted white vinegar. If the element is heavily scaled, plug the humidifier into an electrical socket and turn it ON for no longer than 15 seconds. After this time turn the humidifier OFF and unplug it from the electrical outlet. Let solution stand 20 minutes, cleaning all interior surfaces with a soft brush. Dampen a cloth with undiluted white vinegar and wipe out entire tray to remove scale.
3. Rinse with clean warm water to remove scale and the white vinegar solution before beginning to disinfect the tank.
4. Wipe the heating element clean with a soft cloth after it has had a chance to cool.

Disinfect tank

1. Fill tank with 1 teaspoon of bleach and 3.5 litres of water.
2. Let the solution stand for 20 minutes, swishing every few minutes. Wet all surfaces.
3. Empty the tank after 20 minutes, and rinse well with water until the bleach smell is gone. Dry with some paper towel.
4. Refill the water tank with cool water; replace the water tank. Repeat Operating Instructions.

STORAGE INSTRUCTIONS

When not using your humidifier for an extended period of time:

1. Dispose of the filter. DO NOT leave in unit.
2. Clean, rinse and thoroughly dry the humidifier as directed in weekly maintenance. DO NOT leave any water in the unit when storing. Leaving water in the unit may render the unit in-operable for the following season.
3. Place the humidifier in the original carton and store in a cool, dry place.
4. Order your Bionaire™ replacement filter (BWF-75-I) for next year's use.

SERVICE INSTRUCTIONS

1. Do NOT attempt to repair or adjust any electrical or mechanical functions on this unit. Doing so will void the warranty. The insides of the unit contain no user serviceable parts. Only qualified personnel should perform all servicing.
2. Should the unit stop working, first check the fuse in the plug (UK only) or fuse/circuit breaker at the distribution board is operating, before contacting the manufacturer or service agent.
3. If you need to exchange the unit, please return it in its original carton, with a sales receipt, to the store where you purchased it.
4. Should your humidifier require service, please contact your local dealer.

ACCESSORIES FOR MODEL BCM3600

- BWF75-I Wick filter.
- Bionaire™ Cleaning Solution

For U.K. and Ireland only:

If the plug is not suitable for the socket outlets in your home, it can be removed and replaced by a plug of the correct type. Please refer to "Installation of a plug" below.

Installation of a plug

Applicable to U.K. and Ireland

The wires in the mains lead are coloured as such:


BROWN - LIVE
BLUE - NEUTRAL

Please note that the colour of these mains wires may not correspond with the colour markings that identify the terminals in your plug. Please proceed as follows:

The BROWN coloured wire must be connected to the terminal, which is marked with the letter "L" or is coloured RED.

The BLUE coloured wire must be connected to the terminal, which is marked with the letter "N" or is coloured BLACK.

DO NOT CONNECT either of these wires to the earth terminal in the plug. The earth terminal plug is marked with the letter "E", or with the earth symbol ⚡ or coloured GREEN, or GREEN and YELLOW.



NOTE: If the terminals in the plug are not marked or if you are unsure or in doubt about the installation of the plug please contact a qualified electrician. If a 13A 3-pin plug is fitted, it must be an ASTA approved plug, conforming to BS1363 standard.

GUARANTEE

PLEASE KEEP YOUR RECEIPT AS THIS WILL BE REQUIRED FOR ANY CLAIMS UNDER THIS GUARANTEE.

- This product is guaranteed for 2 years.
- In the unlikely event of breakdown, please take it back to the place of purchase, with your till receipt and a copy of this guarantee.
- The rights and benefits under this guarantee are additional to your statutory rights which are not affected by this guarantee.
- Holmes Products Europe undertakes within the specific period, to repair or replace free of charge, any part of the appliance found to be defective provided that:
 - We are promptly informed of the defect.
 - The appliance has not been altered in any way or subjected to misuse or repair by a person other than a person authorised by Holmes Products Europe.
- No rights are given under this guarantee to a person acquiring the appliance second hand or for commercial or communal uses.
- Any repaired or replaced appliance will be guaranteed on these terms for the remaining portion of the guarantee.

THIS PRODUCT IS MANUFACTURED TO COMPLY WITH THE E.E.C. DIRECTIVES 73/23/EEC and 89/336/EEC.

FRANÇAIS

FÉLICITATIONS

En optant pour un humidificateur Bionaïre™, vous avez choisi l'un des humidificateurs les plus perfectionnés du marché.

LIRE ET CONSERVER CES INSTRUCTIONS.

REMARQUE : Se référer aux illustrations correspondantes avant de prendre connaissance de ces instructions.

DESCRIPTIONS (VOIR FIG. 1)

- A. RÉSERVOIRS D'EAU
- B. HUMIDISTAT
- C. TÉMOIN DE REMPLISSAGE
- D. GRILLES DE SORTIE D'HUMIDITÉ
- E. TÉMOIN DE MISE SOUS TENSION
- F. INDICATEUR DE CHANGEMENT DE FILTRE Filter Monitor™
- G. GRILLES D'ENTRÉE D'AIR
- H. BASE DE L'HUMIDIFICATEUR
- I. CORPS DE L'HUMIDIFICATEUR

FIG. 2 INSTALLATION DES ROULETTES

- A. Roulettes fixes
- B. Roulettes pivotantes
- C. Dessous de la base de l'humidificateur

FIG. 3

- A. Filtre circulaire longue durée
- B. Support de filtre circulaire
- C. Contacteur à flotteur
- D. Base de l'humidificateur

MESURES DE SÉCURITÉ

Lors de l'utilisation d'appareils électriques, il est nécessaire de se conformer aux précautions d'usage pour éviter tout risque d'incendie, de décharge électrique et de se blesser. Celles-ci comprennent notamment :

- Lire toutes les instructions avant emploi.
- Pour éviter un incendie ou risque d'électrocution, brancher l'appareil directement dans une prise électrique et bien enfoncer la fiche.
- Ne pas laisser traîner le fil dans des endroits de passage.
 - Pour éviter tout risque d'incendie, ne JAMAIS placer le fil sous des tapis ou près de radiateurs, poêles ou autre appareil de chauffage.
- NE PAS placer l'humidificateur près d'une source de chaleur telle qu'un poêle, un radiateur ou autre appareil de chauffage. Placer votre humidificateur le long d'une cloison interne, près d'une prise électrique. Pour en améliorer

les performances, l'espace entre le mur et l'humidificateur doit être au moins de 10cm/4"

- **ATTENTION** : Ne pas essayer de remplir l'humidificateur sans l'avoir préalablement débranché de la prise électrique. Bien s'assurer de débrancher en maintenant la prise et non pas en tirant sur le fil.
- NE JAMAIS laisser tomber ou insérer tout objet dans l'une ou l'autre des ouvertures. NE PAS placer les mains, le visage ou le corps directement au-dessus ou proche de la sortie d'air humide lorsque l'appareil est en marche. NE PAS couvrir la sortie d'air humide ou placer tout objet lorsque l'appareil est en marche.
- NE PAS utiliser l'appareil avec un cordon ou une prise d'alimentation endommagé(e), après une défaillance de l'appareil ou s'il a subi un choc en tombant ou a été endommagé de quelque façon que ce soit. Retourner l'appareil au fabricant pour un contrôle, un réglage électrique ou mécanique ou pour réparation.
- Se servir uniquement de l'appareil pour un usage domestique, tel que décrit dans ce manuel. Toute autre utilisation non recommandée par le fabricant peut provoquer un incendie, un choc électrique ou des blessures corporelles. L'utilisation d'accessoires non recommandés ou vendus par le Groupe Holmes peut être dangereux.
- NE PAS utiliser à l'extérieur.
- Toujours placer l'humidificateur sur une surface plane, lisse et ferme. Il est recommandé de placer un revêtement ou support étanche sous l'humidificateur. NE JAMAIS le placer sur une surface susceptible d'être endommagée par une exposition à l'eau et à l'humidité (c.-à-d. des parquets vernis).
- NE PAS orienter la sortie d'air humide directement face au mur. L'humidité pourrait occasionner des dégâts, notamment au niveau du papier peint.
- Toujours débrancher l'humidificateur lorsqu'il ne fonctionne pas.
- NE JAMAIS incliner, déplacer ou vider l'appareil lorsqu'il fonctionne. Eteindre et débrancher avant de retirer le réservoir d'eau et de bouger l'appareil. NE PAS essayer de retirer le réservoir d'eau juste après avoir éteint et débranché l'humidificateur, au risque de vous blesser sérieusement. Attendre 15 minutes avant d'opérer
- Cet humidificateur nécessite un entretien régulier pour fonctionner dans des conditions optimales. Se référer aux procédures de nettoyage et d'entretien.
- NE JAMAIS utiliser de détergents, d'essence, de produit nettoyant pour vitres, lustrant pour meubles, solvant pour peintures ou tout autre produit d'entretien ménager pour nettoyer les

pièces de l'humidificateur.

- Une humidité excessive dans une pièce peut provoquer une condensation d'eau sur les vitres et certains meubles. Si cela se produit, ETEINDRE l'humidificateur.
- Ne pas utiliser l'humidificateur dans un endroit où le taux d'hygrométrie excède 55%.
- NE PAS essayer de réparer ou de régler toute fonction électrique ou mécanique de cet appareil. Celui-ci ne contient aucune pièce directement réparable par l'utilisateur. Toutes les réparations doivent être réalisées uniquement par un personnel qualifié.
- En cas d'endommagement du cordon d'alimentation, celui-ci doit être remplacé par le fabricant ou son distributeur agréé ou tout autre professionnel présentant les mêmes qualifications.

CONSERVER CES INSTRUCTIONS

REMARQUE : cet appareil électrique nécessite toute votre attention lorsqu'il est en marche.

FONCTIONNEMENT DE VOTRE HUMIDIFICATEUR À BUÉE FROIDE

Votre humidificateur à buée froide Bionaïre™ aspire l'air sec à travers la grille d'admission arrière. L'air passe ensuite à travers un filtre à mèche fortement chargé en eau qui en retient les minéraux et les dépôts. L'air humide produit est expulsé directement dans la pièce par la grille supérieure.

REMARQUE : Ce système d'humidification produit une buée fraîche et invisible. Il est normal de ne pas la voir.

NOTA : un degré d'humidité inférieur à 20% peut être malsain et inconfortable. Le degré d'humidité recommandé est de 45% à 55%.

CONSIGNES PRÉALABLES À L'EMPLOI

1. S'assurer que le bouton de commande est en position OFF et que l'appareil est débranché de la prise électrique.
2. Retirer le corps, le filtre et les réservoirs.
3. **POUR OFFRIR PLUS DE MOBILITÉ ET DE COMMODITÉ À VOTRE HUMIDIFICATEUR**, installer les roulettes. Retirer les quatre roulettes de leur pochette d'emballage à l'intérieur du carton. Retourner l'appareil et localiser les trous aux quatre extrémités sous la base.

REMARQUE : Vous remarquez deux modèles différents de roulettes. Deux d'entre-elles sont fixes et les deux autres sont de type pivotant. Les roulettes fixes sont identifiables par un dessus plat tandis que les roulettes pivotantes sont incurvées, avec une petite pièce en plastique sur la tige. Voir figure 1 pour bien positionner chaque type de roulette. NE PAS utiliser d'outils pour installer les roulettes, ceux-ci pouvant endommager la base de l'appareil. Remettre l'appareil tête en haut.