

This Owner's Manual is provided and hosted by [Appliance Factory Parts](#).




NSA 7100 Owner's Manual

[Shop genuine replacement parts for NSA 7100](#)

[Find Your NSA Air Cleaner Parts - Select From 5 Models](#)

----- Manual continues below -----

7100

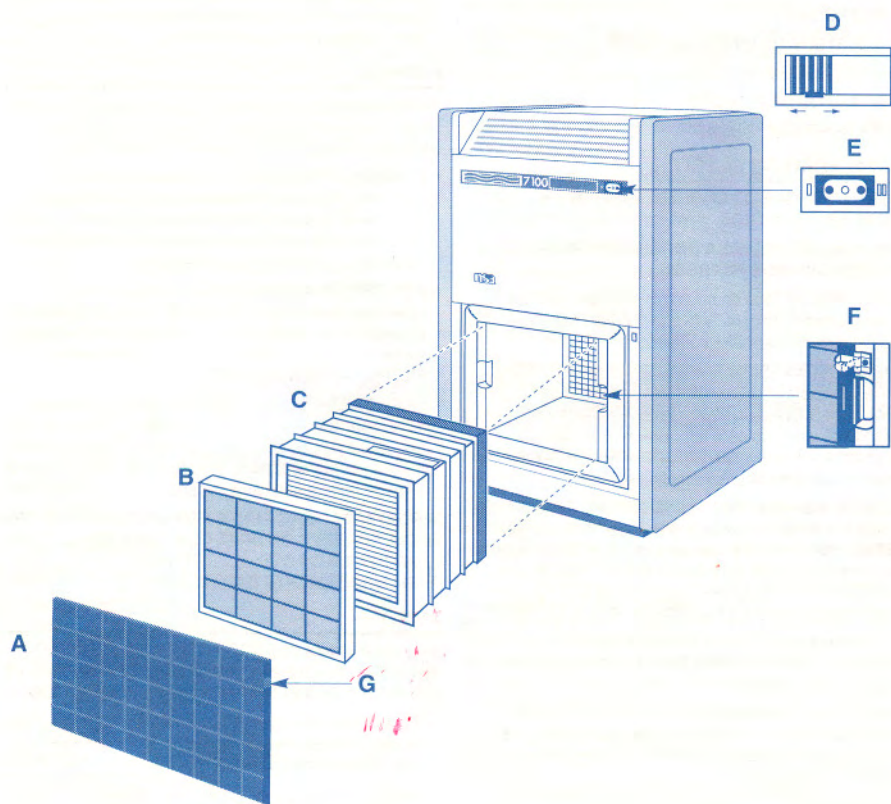

msa™

© 6/93

CAUTION: Read and Save These Instructions.

- A - PRE-FILTER
- B - EC-1270™ TRI-MEDIA FILTER
- C - HEPA FILTER
- D - AIR DIRECTION LOUVER
- E - ON/OFF OPERATION
- F - RETAINER CLIPS
- G - PULL TABS

FILTER INSTALLATION

WARNING: DISCONNECT FROM POWER SUPPLY BEFORE INSTALLING FILTERS.

IMPORTANT! REMOVE ALL PROTECTIVE PLASTIC PACKAGING FROM THE FILTERS.

Remove the front **PRE-FILTER** using the pull tabs on each side of the **PRE-FILTER**. Gently pull outward and lift up.

Remove the **EC-1270™ TRI-MEDIA FILTER** and **HEPA FILTER** from the filter cavity. To do so, unsnap the metal **RETAINER CLIPS** by pulling outward on the clips. Extract the filters by placing your fingers into the side slots and pull the filters toward you.

After removing all the protective plastic packaging, return the filters to the filter cavity. Install the **HEPA FILTER** first. Make sure that the side with the foam sealant faces inward. (AIR FLOW ARROWS POINT INWARD). Next, install the **EC-1270™ TRI-MEDIA FILTER**.

Lock the filters in position by pushing the filters inward and snapping the **RETAINER CLIPS** into place.

Replace the **PRE-FILTER** by inserting the bottom tab into the bottom slot, then push the top of the **PRE-FILTER** forward until the velcro buttons grab.

ON/OFF OPERATION

The **MODEL 7100** is equipped with a two speed blower controlled by a three position switch with power on indicator lights. Select low or high operation.

FILTER REPLACEMENT

NOTE: FAILURE TO REPLACE THE FILTERS WILL RESULT IN A LOSS OF CLEANING EFFICIENCY. Dirty filters must be replaced on a regular basis. Frequency of replacement will depend on the amount of use and/or the individual household/office conditions.

IMPORTANT! BLOWER DAMAGE MAY OCCUR IF THE

FILTERS ARE NOT REPLACED AS RECOMMENDED. FAILURE TO DO SO COULD VOID PRODUCT WARRANTY.

WHOLESALE FILTER PROGRAM

WARRANTY REGISTRATION entitles you, the customer, to purchase replacement filters **DIRECTLY FROM NSA AT WHOLESALE/DISCOUNT PRICES.** Please make sure that the warranty card is properly completed and mailed to NSA.

CLEANING

To keep your unit clean, dust with a dry cloth or wipe down with a damp cloth. Do not use harsh detergents.

DISCONNECT POWER BEFORE CLEANING.

- **PRE-FILTER PANEL** can be kept free of large dust particles by vacuuming. To maintain maximum efficiency this filter should be replaced periodically. Frequency of replacement is dependent on the amount of use and/or the environmental conditions.
- **EC-1270™ TRI-MEDIA FILTER** should be replaced a minimum of every 6 months. The amount of use and/or household/office conditions may require that you replace your **EC-1270™ TRI-MEDIA FILTER** more frequently.
- **HEPA FILTER** (High Efficiency Particulate Air) should be replaced a minimum of every 2 years. The amount of use and/or household/office conditions may require the replacement more frequently to maintain maximum efficiency.

IMPORTANT! DO NOT ATTEMPT CLEANING THE EC-1270™ TRI-MEDIA FILTER OR HEPA FILTER WITH WATER OR OTHER LIQUIDS. PERMANENT DAMAGE WILL OCCUR.

WARNING

To reduce the risk of **FIRE** or **ELECTRIC SHOCK, DO NOT** use this fan with any Solid State Speed Control Device.

- There are no user serviceable parts inside. Do not attempt to disassemble. For service refer to warranty.
- Do not block the air flow into or out of the unit.
- To protect against the risk of electrical shock, do not immerse the cord, plug or unit in water or other liquids.
- Do not operate any appliance with a damaged cord or plug. If the appliance malfunctions or has been dropped or damaged in any manner, and the fan motor fails to rotate, refer to the warranty instructions.