

# THROUGH-THE-WALL AIR CONDITIONERS

LG's Through-The-Wall models offer versatile, energy efficient solutions for residential and light commercial applications.

Some of LG's Through-The-Wall models are ENERGY STAR® qualified, an important feature for energy conscious customers. All feature Gold Fin™ Technology which protects the unit from the corrosive effects of the salt air and extend the operating life.

BTU sizes range from 8,000 - 14,000, and both cooling only and heat/cool models are offered. Also, the standard size chassis fits into any competitive wall sleeve, allowing for an easy upgrade for an existing system.

## TTW Features™ & Benefits

### Gold Fin™ Anti-Corrosive Treatment

Protects the unit from the corrosive effects of outside air and extends the operating life of TTW models.

### Push Button Shift Mode

Allows you to switch between cool and heat with ease.

### 12 Hour On/Off Timer

Allows you to set the number of hours up to 12 Hours, you'd like the unit to run.

### Auto Sleep Mode.

Automatically increases the temperature setting 2° F twice (after 1/2 hour and one hour). The interior unit shuts off when the timer setting is reached.

### Auto Restart.

Automatically restarts a unit to programmed setting when the electricity comes on after a power failure.

### Trim Kit.

Unit has a nice finished look when placed into an existing wall sleeve.

### Remote Control

Easy to use Wireless Remote Control.



# 8,000-14,000 BTUs



- **LT0810CR** (A/C Model)  
8,000 BTUs **Cooling**
- **LT1010CR** (A/C Model)  
9,800 BTUs **Cooling**
- **LT1030CR** (A/C Model)  
10,000 BTUs **Cooling**

- **LT1210CR** (A/C Model)  
11,500 BTUs **Cooling**
- **LT1230CR** (A/C Model)  
11,500 BTUs **Cooling**
- **LT1430CR** (A/C Model)  
13,000 BTUs **Cooling**

### Standard Features:

- Gold Fin™ anti-corrosion treatment
- Cooling mode
- Heating mode
- Fan mode
- Auto sleep mode
- Auto restart
- 12-Hour on/off timer

### System Includes:

- Wall unit
- Remote control and batteries
- Installation manual
- Trim Kit

System Model #	LT0810CR	LT1010CR	LT1030CR	LT1210CR	LT1230CR	LT1430CR
<b>Performance</b>						
Capacity (BTUs)	8,000	9,800	10,000/9,800	11,500	11,500/11,200	13,000/12,600
EER	9.6	8.8	9.4/9.4	8.8	8.8/8.8	8.5/8.5
Energy Star						
Air Circulation (CFM H/L)	260/220	285/225	285/225	290/230	290/230	310/250
Fan Speeds (Cooling/Fan)	3/3	3/3	3/3	3/3	3/3	3/3
Dehumidification (pts/hr)	2.2	3.2	3.2	3.8	3.8	4.3
Indoor dB(A)*	49/46	51/48	51/48	52/49	52/49	53/50
Outdoor dB(A)*	59	60	60	61	61	62
<b>Electrical</b>						
Rated Voltage	115-60-1	115-60-1	230/208-60-1	115-60-1	230/208-60-1	230/208-60-1
Circuit Breaker (A)	15	15	15	15	15	15
<b>Dimensions</b>						
W x H x D (inches)	24 x 14 13/32 x 20 3/32	24 x 14 13/32 x 20 3/32	24 x 14 13/32 x 20 3/32	24 x 14 13/32 x 20 3/32	24 x 14 13/32 x 20 3/32	24 x 14 13/32 x 20 3/32
Weight (lbs.)	73.0	78.0	78.0	80.0	80.0	87.0
<b>Thermostat Range</b>						
Cooling (°F)	60-86	60-86	60-86	60-86	60-86	60-86

\*LG verified sound rating



10,000-12,000 BTUs

- C** **H** **LT1030HR** (H/C Model)  
10,000 BTUs **Cooling & Heating**
- LT1230HR** (H/C Model)  
11,500 BTUs **Cooling & Heating**



**Standard Features:**

- Gold Fin™ anti-corrosion treatment
- Cooling mode
- Heating mode
- Fan mode
- Auto sleep mode
- Auto restart
- 12-Hour on/off timer

**System Includes:**

- Wall unit
- Remote control and batteries
- Installation manual
- Trim Kit

System Model #	LT1030HR	LT1230HR
<b>Performance</b>		
Capacity (BTUs)	<b>C</b> 10,000/9,800 <b>H</b> 11,200/9,200	11,500/11,200 11,200/9,200
EER	9.4/9.4	8.8/8.8
Energy Star		
Air Circulation (CFM H/L)	285/225	290/230
Fan Speeds (Cooling/Heating/Fan)	2/2/2	2/2/2
Dehumidification (pts/hr)	3.2	3.8
Indoor dB(A)*	51/48	52/49
Outdoor dB(A)*	60	61
<b>Electrical</b>		
Rated Voltage	230/208-60-1	230/208-60-1
Circuit Breaker (A)	20	20
<b>Dimensions</b>		
W x H x D (inches)	24 21/32 x 14 13/32 x 19 21/32	24 21/32 x 14 13/32 x 19 21/32
Weight (lbs.)	78.0	80.0
<b>Thermostat Range</b>		
Cooling/Heating (°F)	60-86/54-86	60-86/54-86

\*LG verified sound rating

OPTIONAL ACCESSORIES


Description	Model #
26" Wall Sleeve	AXSVA1A-1
Stamped Aluminum Grille	AXRGALA01
Solid Grille with Stamped Aluminum Grille	AXSVA4
Architectural Grille	AXAGALA01A
Architectural Grille - Customer Color	AXAGALX01A



Wall Sleeve  
AXSVA1A-1



Stamped Aluminum Grille  
AXRGALA01

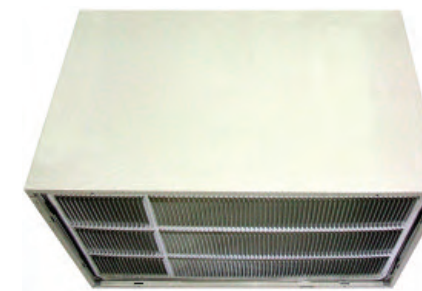

Solid Grille with Stamped Aluminum Grill  
AXSVA4



Architectural Grille  
AXAGALA01A  
Available in aluminum, dark bronze and soft dove

Sleeve Dimensions of Major Brands (inches)	Friedrich USC Sleeve	GE	Amana	Whirlpool Fedders	Frigidaire
Height	15 17/32	15 5/8	15 5/8	15 3/4	15 7/16
Width	25 7/8	26	26	26 3/4	25 7/8
Depth	16 23/32	16 7/8	16 7/8	15	18