

LG Room Air Conditioners 2003



**LG Electronics Inc.**

20 Yoido-dong, Youngdungpo-gu, Yoido P.O.Box 355 Seoul 150-721, Korea  
Phone: 82-2-3777-7342 Fax: 82-2-3777-5135/6

<http://www.lge.com>  
<http://www.lgcac.com>

IMPROVE THE QUALITY OF YOUR LIFE WITH  
LG AIR CONDITIONERS


A Better Life with Digital



Digitally yours

# The World Best Seller

LG Air Conditioners

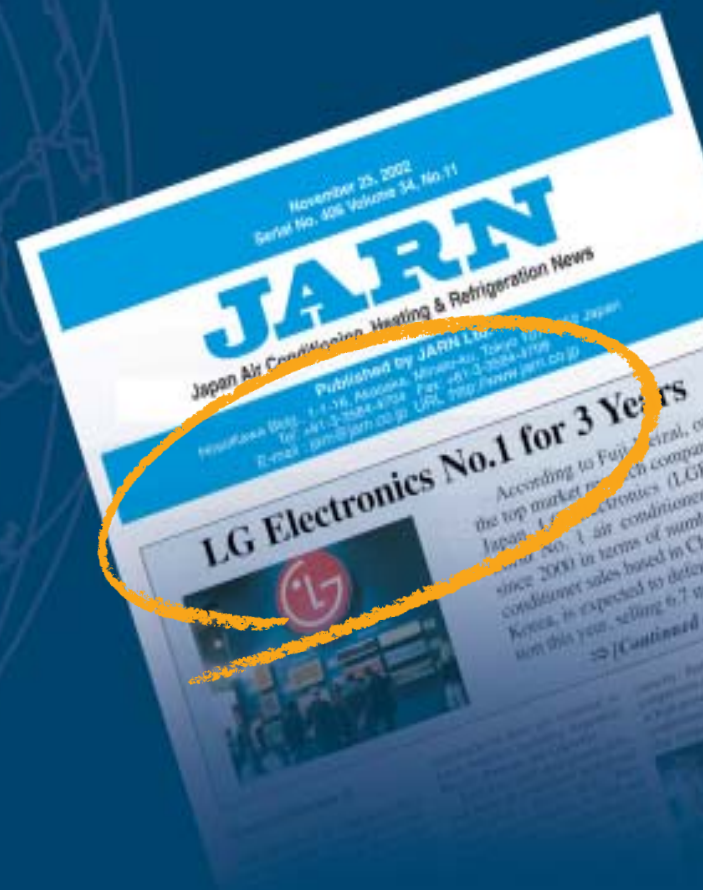

## LG Electronics No.1 for 3 Years

JARN (Japan Air Conditioning, heating & Refrigeration News), a respected Japanese air conditioning journal, which is published in English, recently featured an article entitled 'LG Electronics No.1 for 3 years' in its November 2002 issue.

LGE, the world No.1 air conditioner maker since 2000 is expected to defend its position this year, selling 6.7 million units. LG air conditioners were also declared to be the best by journals such as 'Consumer Reports' in the United States, 'CHOICE' in Australia.

However, not wishing to become complacent about such praise, LG of course continues its policy of ongoing research and design, strict quality control and innovative marketing activities with its focus, as always, on customer satisfaction.

## Contents

Single Split Wall Mounted Type 4



4

ART COOL



18

Window Type 24



Performance Conversion Table

	Btu/h	kcal/h	W	kJ	HP	R ton
1 Btu/h	1	0.252	0.293	1.055	0.00039	0.000083
1 kcal/h	3.968	1	1.163	4.186	0.00155	0.000329
1 W	3.413	0.86	1	3.601	0.00133	0.000283
1 kJ	0.948	0.239	0.278	1	0.00037	0.000079
1 HP	2559	645	750	2700	1	0.212
1 R ton	12000	3024	3516	12660	4.68	1

# Great Company Great People

## LG Air Conditioners World-winning Technology...

LG offers a more advantageous business environment for its customers with its range of air conditioner features.

Its "PLASMA™ Air Purifying System", first developed and marketed in 1999, has proved its effectiveness, and LG has since in 2000 developed the world's first semi-permanent "PLASMA™ Heat Exchanger", enhancing the functionality of the core component.

In 2001 the company introduced state-of-the-art digital telephone remote control technology, and developed the "Tele-control air conditioner", which is activated or stopped remotely via an ordinary telephone.

To maintain its product leadership in the market, LG Air conditioners places a lot of emphasis on improvements such as reduced energy consumption, high efficiency, low noise compressors, ventilation systems and compact product dimensions, etc.

## Brief History

### Establishment

- 1947 Establishment of LG Group
- 1958 Establishment of LG Electronics Inc.
- 1962 Establishment of Digital Appliance Company

### Growth

- 1968 Manufactured Korea's first Air Conditioners
- 1985 Introduced Korea's first Inverter Air Conditioners
- 1986 Exported Korea's first Window Air Conditioner to U.S.A
- 1989 Won the approval of "UL's MDP & CSA's EEVP"
- 1993 Obtained ISO 9001 Certification from "BSI-QA"
- 1994 Export Records USD 100 Mil.

### Global Expansion

- 1995 Establishment of LGETA in China
- 1997 Establishment of LGEIL in India
- 1999 Establishment of LGEAT in Turkey
- 1999 Establishment of LGEMH in Vietnam
- 2001 Establishment of LGAEZ in Brazil
- 2002 Establishment of LGETH in Thailand
- 2002 Establishment of LGEIN in Indonesia
- 2002 Turnover of 1.8 Billion dollars (Expected)

## The Future is Bright for LG Air Conditioners

LG Air conditioners, which first manufactured window type air conditioners in Korea in 1968, has undergone tremendous growth to achieve a turnover of *1.8 billion dollars in 2002*.

The company supplies *over 7 million units* to markets worldwide through its manufacturing sites in Korea, China, India, Turkey, Vietnam, Thailand, Indonesia and Brazil.

## Overseas Manufacturing Bases



LG Air Conditioning Division, Korea



LGE Tianjin Appliance Co., Ltd. China



LG Electronics Arcelik, Turkey



LGE New Delhi Ltd. India



LGE Haiphong Inc. Vietnam



LGE da Amazonia Ltd. Brazil



LG Electronics Indonesia, Indonesia



LG Electronics Thailand, Thailand





**PLASMA GOLD**

technology for **your health**

enjoy **cool & clean air**





# Single Split Wall Mounted Type


This can be easily installed in a small space, and has exceptional cooling capacity. Designed for low-noise operation, it ensures a pleasant air conditioned environment. It also features Jet Cool for high level cooling and clean air supply through its Plasma air purifying system.




## Dual PLASMA Air Purifying System




(Over 18K Btu/h)

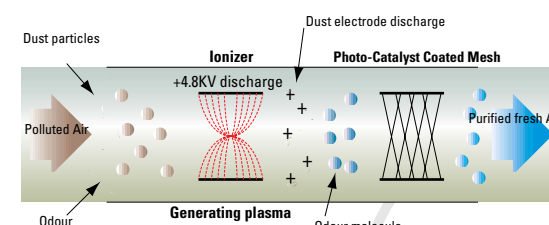


The PLASMA Air Purifying System developed uniquely by LG not only removes microscopic contaminants and dust, but also removes house mites, pollen, and pet fur to help prevent allergic diseases like asthma. With a filter that can be used over and over again by simply washing with water, you can enjoy clean fresh air without having to worry about changing the filter every two years as in the past and save costs. With a filter that can be used over and over again by simply washing with water, you can enjoy clean fresh air without having to worry about changing the filter every two years as in the past and save costs.




### Deodorization

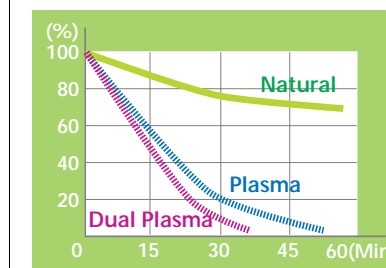

### Dust Reduction

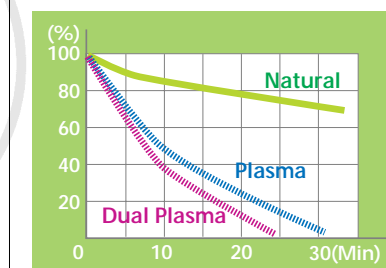

### Anti-Allergy

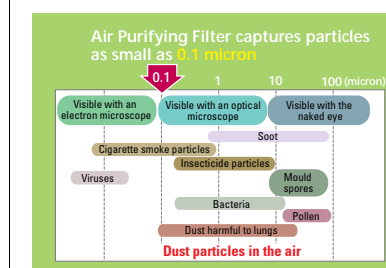

Evaluated by CSIRO Australia (DBCE Doc 98/204)  
Tested by Korean Food Research Institute and Japanese Environmental Centre and Yonsei Univ. College of Medicine. (Allergy Research Lab.)




## No-aging PLASMA Heat Exchanger



### Innovative No-Aging Heat Exchanger

LG has developed the new heat exchanger where there is no-aging on the surface of fin. It is the first in the world.

### Save Energy




### Heat exchanger Seen from Top



**LG PLASMA**  
Water droplets do not form

**Non-PLASMA**  
Water droplets form causing corrosion, affecting energy Consumption

### Reduce Noise Level




### Heat exchanger Seen from Side



**LG PLASMA**  
Film of water allows for efficient and low noise air flow


**Non-PLASMA**  
Water droplets get in the way of efficient and quiet air flow, causing noise

## Anti Rust Gold Fin™

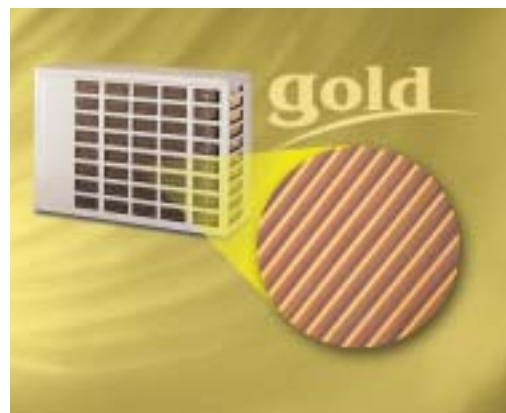

LG's Heat exchanger surface are coated with an anticorrosive, gold on aluminum. This ensures their surface is always free of corrosion and helps keep them performing like new one.

### Uncoated Aluminum



### Structure

Bare Aluminum

### Gold Fin



### Structure

Top Coating  
Anticorrosion layer  
Aluminum

-Pitting corrosion on the surface

**Salt Spray Test Result: After 360 hours**  
[ Test Standard: KS D 9502, ASTM B-117 ]

## Wireless Remote Controller



A Type



B Type  
(Luminous)



C Type

### 1 START/STOP BUTTON

Operation starts when this button is pressed and stops when the button is pressed again..

### 2 OPERATION MODE SELECTION BUTTON

Used to select the operation mode..

### 3 ROOM TEMPERATURE SETTING BUTTONS

Used to start or stop louver movement and set the desired up/down airflow direction.

### 4 INDOOR FAN SPEED SELECTOR

Used to select fan speed in four steps low, medium, high and CHAOS.

### 5 JET COOL

Used to start or stop the speed cooling. (Speed cooling operates super high fan speed in cooling mode.).

### 6 CHAOS SWING BUTTON

Used to stop or start louver movement and set the desired up/down airflow direction..

### 7 ON/OFF TIMER BUTTONS

Used to set the time of starting and stopping operation.

### 8 TIME SETTING BUTTONS

Used to adjust the time.

### 9 TIMER SET/CANCEL BUTTON

Used to set the timer when the desired time is obtained and to cancel the Timer operation.

### 10 SLEEP MODE AUTO BUTTON

Used to set Sleep Mode Auto operation.

### 11 AIR CIRCULATION BUTTON

Used to circulate the room air without cooling or heating.

### 12 ROOM TEMPERATURE CHECKING BUTTON

Used to check the room temperature.

### 13 PLASMA(OPTIONAL)

Used to start or stop the plasma-purification function.

### 14 HORIZONTAL AIRFLOW DIRECTION CONTROL BUTTON (NOT ON ALL MODELS)


Used to set the desired horizontal airflow direction.

### 15 RESET BUTTON

Used prior to resetting time or after replacing batteries.

### 16 2nd F Button

Used prior to using modes printed in blue at the bottom of buttons.

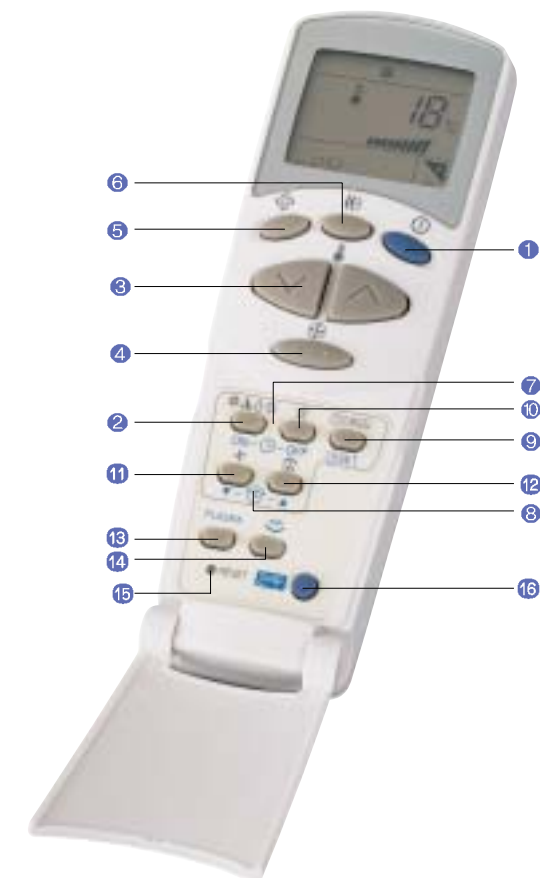




### Jet Cool™

Jet cool function is for quick cooling. In this mode, strong and cool air is blown at high speeds for 30 minutes until the room temperature reaches to 18 °C.




### 4 Way Auto Swing

Hot or cold air can be evenly distributed in a room as the auto swing function blows air in 4 directions.

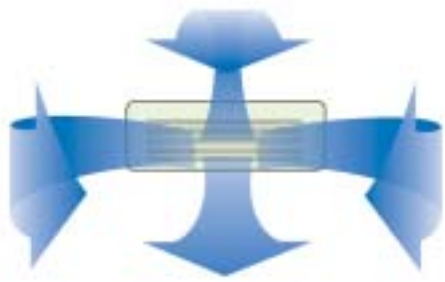

### Auto Operation

The operation procedure is as following.  
(Cooling & Heating Model)

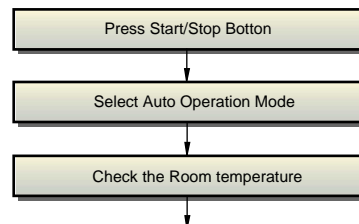

Operation	Are Automatically Decided By Fuzzy Rule.		
Indoor Fan Speed	Are Automatically Decided By Fuzzy Rule.		
Setting Temperature	Are Automatically Decided By Fuzzy Rule.		
Intake-air Temperature	Below 21°C	Over 21°C~ Below 24°C	Over 24°C
Operation Mode	Heating	Soft Dry	Cooling

If initial mode is decided, that mode is continued without the room temperature changing.




### Healthy Dehumidification

With the use of a newly designed compressor, humidity is eliminated to create a comfortable atmosphere without overcooling the room.



### Indoor Temperature Distribution Chart

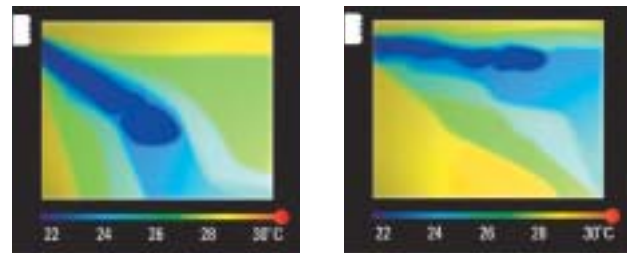


#### Conventional

Since the surrounding temperature is sensed after the air from the unit is widely distributed, an accurate temperature reading of the air is not possible.

#### Healthy Dehumidification

By increasing the Vane Angle, a better assessment of the actual temperature is possible to prevent over cooling.

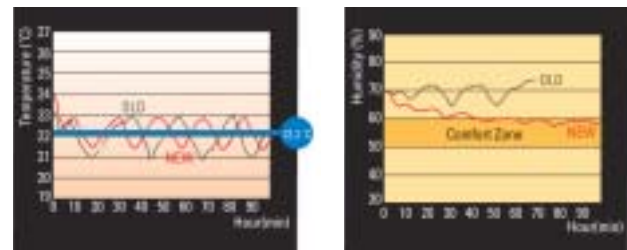


#### Comparison of Indoor Temperature CHAOS

#### Comparison of Indoor Humidity Change





### Natural breeze by CHAOS Swing™

The most pleasant air flow for the human body can be found within nature. Countless data and verification resulted in the application of the new CHAOS theory to LG Air conditioners. The new CHAOS theory is a technology that revives more natural air by controlling the angle and speed of the movement of the vane. Compared with the frequency, the CHAOS air flow proved to be very similar to natural air flow. The CHAOS swing also makes the room more evenly cooled to stimulate a more natural environment which is most comfortable for the human body.

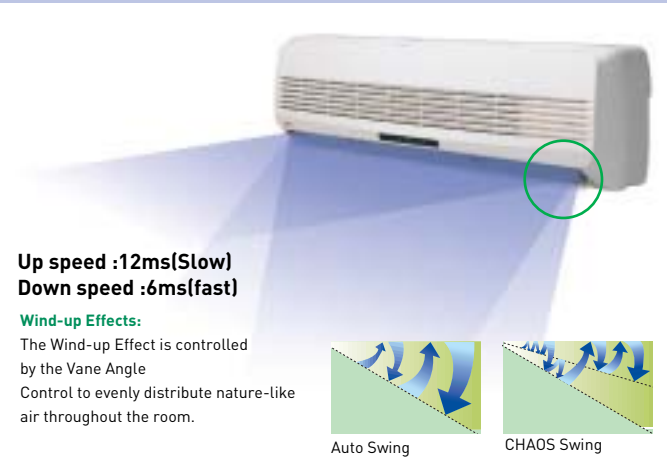


### Chaos Swing Effect

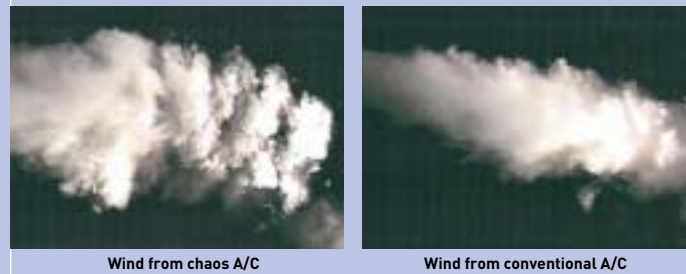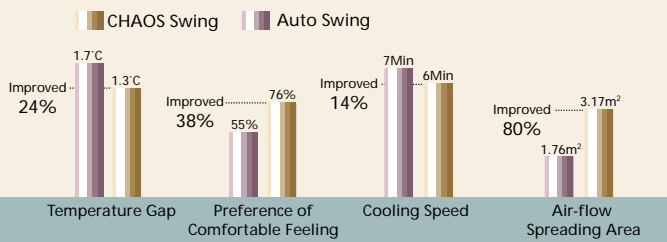

### Low Noise Air Flow System

To provide a comfortable, pleasant, and well balanced environment, LG air conditioners utilize a streamlined air fan and a unique design which create smooth air flow from the air conditioner so that it operates under the lowest noise level. The cross flow fan, stabilizer, and rear guide which are the causes of noise, have been redesigned by hydraulic engineering. The number of revolutions has been decreased while increasing the amount of wind. With the best structure for the air path, the amount of friction has been decreased providing the most quiet air conditioners in the world.

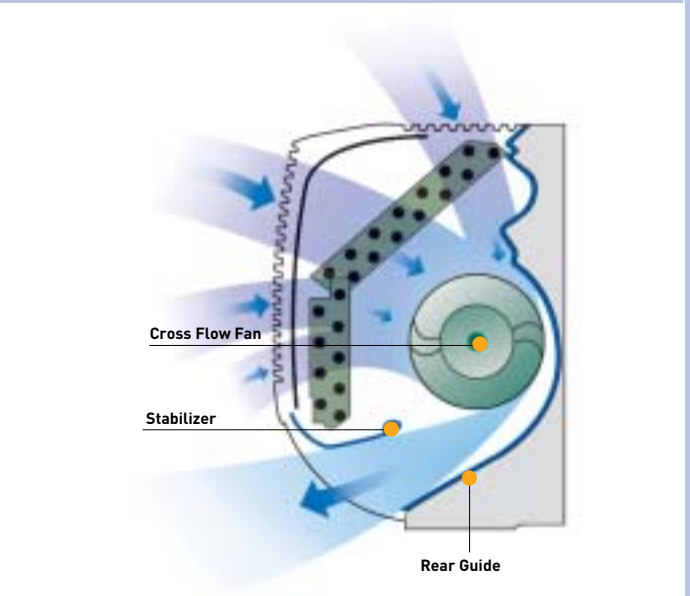

### Auto Restart Function

In the event of sudden power failure, the auto start mechanism will restore the A/C to its previous setting when power returns.



### Sleep Mode Auto Control

A touch of the Sleep Mode Button automatically programs the room air conditioner to turn off, controls the indoor fan speed, and adjusts the setting temperature to create a more comfortable sleep.

# Tele-Control Air Conditioners

The innovative Tele-Control air-conditioner realizes not only on-off control but also gives user additional functions such as operation mode control, temperature control as control as convenient as user wants to operate by a simple phone call.



<p><b>On/Off Control by Telephone</b></p>
<p><b>Operation Mode Control</b></p>
<p><b>Temperature Control</b></p>

### Digital Communication Display

With the help of cutting-edge technology, it is attached with a LCD or Digital Communication Display that removing spells out easy words or short sentences, effectively complicated graphics.

### Multi Control

LG tele-control air conditioner gives you more convenience to control up to 8 indoor unit separately such as on-off, operation mode, temperature control as you want.

### User's Password

This new feature allows the authorized persons only to access to tele-control system with a specified password.

## DIGITAL CLIMA



	Model	Capacity (Btu/h.)	Features
Cooling	LS-Q076DDG	Cooling/Heating: 7,000/7,000	
	LS-Q096DDG	Cooling/Heating: 9,000/9,000	



	Model	Capacity (Btu/h.)	Features
Cooling	LS-R126FEG	Cooling/Heating: 12,000/12,000	
	LS-T246SEG	Cooling/Heating: 24,000/24,000	

- Plasma Air Purifying System
- Natural Wind By CHAOS Swing™
- Healthy Dehumidification
- Jet Cool™
- Plasma Heat Exchanger
- 4 way Auto Swing
- 24-Hour ON/OFF Setting Timer
- Hot Start
- Wireless Remote Controller
- Sleep Mode Auto Operation
- Air Purifying Filter
- Auto Operation
- Quiet Operation
- One-Touch Air Filter (Anti-Bacteria)
- Auto Restart



# Single Split Wall Mounted Type



## PLASMA GOLD



Model	Capacity (Btu/h.)	Features
<b>LS-Q096BDG</b>	Cooling: 9,000	
<b>LS-R126BDG</b>	Cooling: 12,000	
<b>LS-T186BDG</b>	Cooling: 18,000	
<b>LS-T186CDG</b>	Cooling: 18,000	
<b>LS-T246CDG</b>	Cooling: 24,000	
<b>LS-Q096BAG</b>	Cooling: 9,000	
<b>LS-R126CAG</b>	Cooling: 12,000	
<b>LS-T186CAG</b>	Cooling: 18,000	
<b>LS-T246CAG</b>	Cooling: 24,000	
<b>HS-C096RGD0</b>	Cooling: 9,000	
<b>HS-C126RGD0</b>	Cooling: 12,000	

## PLASMA GOLD



Model	Capacity (Btu/h.)	Features
<b>LS-T186CAM</b>	Cooling: 18,000	
<b>LS-T246CAM</b>	Cooling: 24,000	
<b>HS-C096RMD0</b>	Cooling: 9,000	
<b>HS-C126RMD0</b>	Cooling: 12,000	
<b>LS-Q096BBM</b>	Cooling/Heating: 9,000/9,000	
<b>LS-R126CBM</b>	Cooling/Heating: 12,000/12,000	
<b>LS-T186CBM</b>	Cooling/Heating: 18,000/18,000	
<b>LS-T246CBM</b>	Cooling/Heating: 24,000/24,000	

# Comfort & Convenience

# LG Air Conditioners

Cooling Only Cooling & Heating



Model	Capacity (Btu/h.)	Features
<b>HS-C096RMA0</b>	Cooling: 9,000	
<b>HS-C126RMA0</b>	Cooling: 12,000	
<b>HS-C096RMB0</b>	Cooling: 9,000	
<b>HS-C126RMB0</b>	Cooling: 12,000	

Model	Capacity (Btu/h.)	Features
<b>LS-Q096ABM</b>	Cooling/Heating: 9,000/9,000	
<b>LS-R126ABM</b>	Cooling/Heating: 12,000/12,000	
<b>LS-T186ABM</b>	Cooling/Heating: 18,000/18,000	
<b>LS-T246ABM</b>	Cooling/Heating: 24,000/24,000	



Model	Capacity (Btu/h.)	Features
<b>LS-T186ACG</b>	Cooling: 18,000	
<b>HS-C096RGA0</b>	Cooling: 9,000	
<b>HS-C126RGA0</b>	Cooling: 12,000	
<b>LS-Q096AAG</b>	Cooling: 9,000	
<b>LS-T186AAG</b>	Cooling: 18,000	
<b>LS-T246AAG</b>	Cooling: 24,000	
<b>LS-Q076ADG</b>	Cooling: 7,000	
<b>LS-Q096ADG</b>	Cooling: 9,000	
<b>LS-T186ADG</b>	Cooling: 18,000	
<b>LS-T246ADG</b>	Cooling: 24,000	

- Plasma Air Purifying System
- Natural Wind By CHAOS Swing™
- Healthy Dehumidification
- Jet Cool™
- Plasma Heat Exchanger
- 4 way Auto Swing
- 24-Hour ON/OFF Setting Timer
- Hot Start
- Wireless Remote Controller
- Sleep Mode Auto Operation
- Air Purifying Filter
- Auto Operation
- Quiet Operation
- One-Touch Air Filter (Anti-Bacteria)
- Auto Restart

Single Split Wall Mounted Type

# Single Split Wall Mounted Type



	Model	Capacity (Btu/h.)	Features
Cooling	LS-T186ACL	Cooling: 18,000	
	LS-Q096AAL	Cooling: 9,000	
	LS-T186AAL	Cooling: 18,000	
	LS-T246AAL	Cooling: 24,000	
	LS-Q096ADL	Cooling: 9,000	
	LS-T186ADL	Cooling: 18,000	
Heating	LS-T246ADL	Cooling: 24,000	
	LS-Q096AHL	Cooling/Heating: 9,000/9,000	
	LS-R126AHL	Cooling/Heating: 12,000/12,000	
	LS-T186AHL	Cooling/Heating: 18,000/18,000	
	LS-T246AHL	Cooling/Heating: 24,000/24,000	



	Model	Capacity (Btu/h.)	Features
Cooling	LS-M3060CL	Cooling: 30,000	
	LS-N3660CL	Cooling: 36,000	

## Comfort & Convenience

## LG Air Conditioners

Cooling Only Cooling & Heating



	Model	Capacity (Btu/h.)	Features
Cooling	LS-H0561DL	Cooling: 5,000	



	Model	Capacity (Btu/h.)	Features
Cooling	LS-J0963CL	Cooling: 9,000	
	LS-L1261CL	Cooling: 12,000	
	LS-K1863CL	Cooling: 18,000	
Heating	LS-J0962HL	Cooling/Heating: 9,000/9,000	
	LS-L1261HL	Cooling/Heating: 12,000/12,000	
	LS-K1863HL	Cooling/Heating: 18,000/18,000	

### Outdoor Unit



- Plasma Air Purifying System
- Natural Wind By CHAOS Swing™
- Healthy Dehumidification
- Jet Cool™
- Wireless Remote Controller
- Sleep Mode Auto Operation
- Air Purifying Filter
- Auto Operation
- Plasma Heat Exchanger
- 4 way Auto Swing
- 24-Hour ON/OFF Setting Timer
- Hot Start
- Quiet Operation
- One-Touch Air Filter (Anti-Bacteria)
- Auto Restart

ART COOL



sophisticated designs  
enhance your living environment



# Single Split Wall Mounted Type

# ART COOL

Cooling Only    Cooling & Heating




## Comfort & Convenience

## LG Air Conditioners

### Auto Cleaning

#### Remove odor & Save time to clean-up

Auto Clean helps to remove odor and save clean-up time. After using air-conditioner, "Auto Clean" makes the inner part of Air conditioner dry for 30 min. It removes moisture and mould so you can enjoy odor-free air and save time to clean up.

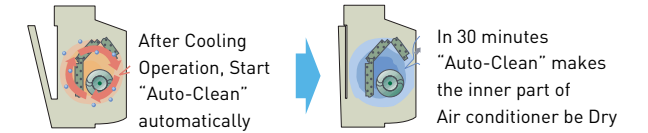

### Dual PLASMA Air Purifying System

**Dust Free! / Odor Free! / Anti Allergy!**  
(Over 12K Btu/h)

### 4 Way Auto Swing (Over 12K Btu/h)

Hot or cold air can be evenly distributed in a room as the auto swing function blows air in 4 directions.

### Digital Display



### Luminous Remote Controller



### ART COOL Deluxe

2002 IF Design Award (Germany)



	Model	Capacity (Btu/h.)	Features
Cooling	LS-C076Z*C0	Cooling: 7,000	
	LS-C096Z*C0	Cooling: 9,000	
	LS-C126U*D0	Cooling: 12,000	
Heating	LS-H076Z*C0	Cooling/Heating: 7,000/7,000	
	LS-H096Z*C0	Cooling/Heating: 9,000/9,000	
	LS-H126U*D0	Cooling/Heating: 12,000/12,000	

\*Stands for the color of the panel of indoor units.

- Plasma Air Purifying System
- Natural Wind By CHAOS Swing™
- Healthy Dehumidification
- Jet Cool™
- Wireless Remote Controller
- Sleep Mode Auto Operation
- 24-Hour ON/OFF Setting Timer
- Auto Operation
- Plasma Heat Exchanger
- 4 way Auto Swing
- 3 Dimensional air flow
- Hot Start (Heat pump Model)
- Quiet Operation
- One-Touch Air Filter (Anti-Bacteria)
- Auto Restart
- Auto Cleaning

# Single Split Wall Mounted Type

## ART COOL


Cooling Only    Cooling & Heating

### ART COOL Wide



	Model	Capacity (Btu/h.)
Cooling	LS-C186V*C0	Cooling: 18,000
Heating	LS-H186V*C0	Cooling/Heating: 18,000/18,500

#### Features

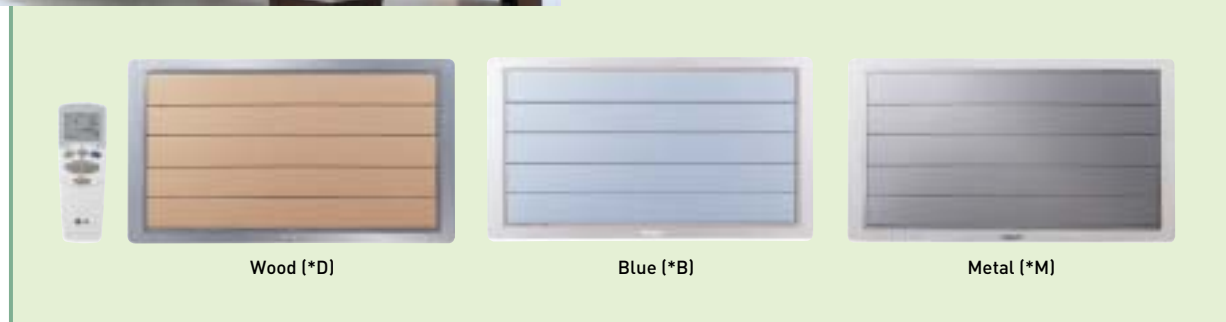


### ART COOL



	Model	Capacity (Btu/h.)
Cooling	LS-C096P*C0	Cooling: 9,000
	LS-C126P*C0	Cooling: 12,000
Heating	LS-H096P*C0	Cooling/Heating: 9,000/9,000
	LS-H126P*C0	Cooling/Heating: 12,000/12,000

#### Features

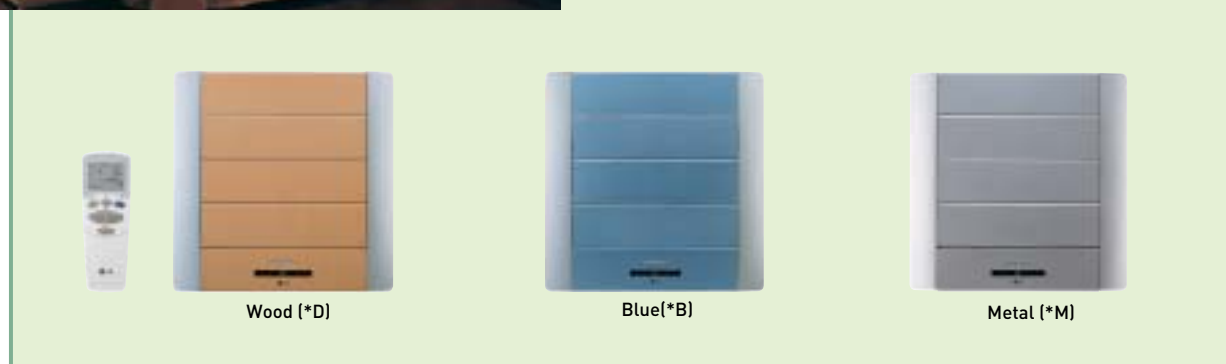

## Comfort & Convenience

## LG Air Conditioners


### 3 Dimensional Air Flow

Design like a work of art, and the new concept of 3 dimensional air flow.

It gives even cooling as well as quick cooling from front & both side.



### Slim Design

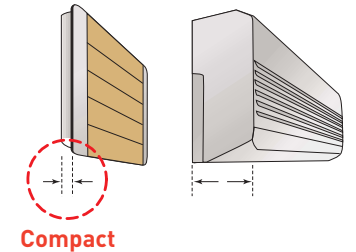

### Air Flow Control

You feel more comfortable and convenient by controlling Air Flow.

1. In normal time, 3 Dimensional air flow cools air more fast and even widely
2. The bottom-ward air flow provides you with speedy and powerful cooling
3. When you sleep, Side air flow provides indirect and soft cooling



**Normal**  
Fast & Even Widely



**Jet Cool**  
Speedy & Powerful



**Sleep Mode**  
Indirectly & Softly


### Auto Cleaning

Remove odor & Save time to clean-up

Auto Clean helps to remove odor and save clean-up time. After using air-conditioner, "Auto Clean" makes the inner part of Air conditioner dry for 30 min. It removes moisture and mould so you can enjoy odor-free air and save time to clean up.

**More sanitary with auto clean louver!**

Dust and grime are kept out by the auto cleaning louver. When operating the unit, the clean door opens and closes when off to help keep the unit clean.

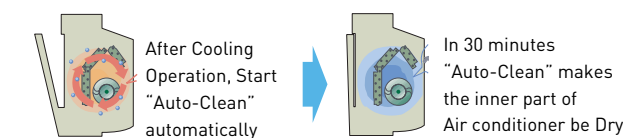





# Window Type

As a single unit this can be installed on a window or on an external wall in a small space. It offers excellent durability and various model types.

### Reversible Open Grille & One touch air filter

Reversible Open Grille helps in easy ejection of air filter from the unit regardless of installation place.



High Installation

Low Installation



### For low noise at high air volume.

The bigger and stronger New Blower and Fan have higher efficiency at lower RPMs.

### High Efficiency Compressor

LG Rotary compressor has a good reputation for low noise, low vibration and high efficiency and reliability.

### 4-Way Air Deflection

It removes dust in the air as well as bacteria proliferation, making the indoor atmosphere healthy.



### Auto Swing

The air circulation vents swing constantly and silently from side to side, directing cool air to every corner of the room.



### Slide-out Chassis

For easy installation and service, the slide-out chassis eliminates the need to remove the unit from the window or wall.




## gold Gold Fin™ Anti Corrosion

LG's Heat exchanger surface are coated with an anticorrosive, gold on aluminum. This ensures their surface is always free of corrosion and helps keep them performing like new one.



### Salt Spray Test for 15 Days

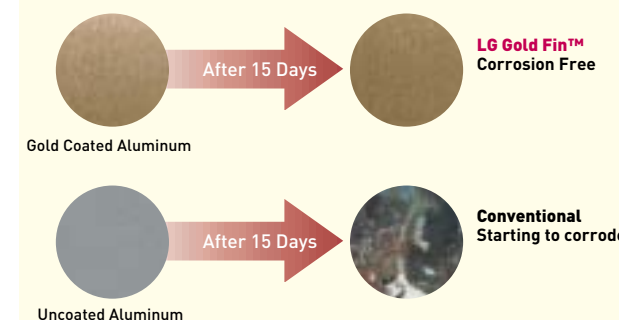

Salt Spray Test Result: After 360 hours  
[ Test Standard: KS D 9502, ASTM B-117 ]

## Remote control and Touch panel

You can use either remote control or touch panel to operate air conditioners (Window Type Micom Models)



- 1 **Display Operation mode**  
It indicates Cool/Fan/Defrost/Heat
- 2 **On/Off Timer Button**  
Set the time of starting and stopping operation.  
The timer is set by 1 hour.
- 3 **Remote Control Receiver**
- 4 **Fan Speed**  
Everytime you press this button, it is set as follows.  
{ F3 → F1 → F2 → F3 →... }  
{High} {Low} {Middle} {High}...
- 5 **Temperature Setting**  
This button can automatically control the temperature of the room.  
The temperature can be set within a range of 16°C to 30°C by 1°C.  
Select the lower number for lower temperature of the room.
- 6 **Auto Swing (optional)**  
The air circulation vents swing constantly and silently from side to side, directing cool air the set is OFF.
- Operation Switch**  
When you first turn on, the set is on the High Cool mode and the Temp of 22°C.  
When you press this button again, the set is OFF.



# Window Type



	Model	Capacity (Btu/h.)	
Cooling	LWG0761QAG	Cooling: 7,000	
	LWG0960QAG	Cooling: 9,000	
	LWC076GGAB0	Cooling: 7,000	
	LWC096GGAB0	Cooling: 9,000	
	LWG0961PAG	Cooling: 9,000	

Features



	Model	Capacity (Btu/h.)	
Cooling	LWC1265PAG	Cooling: 12,000	
	LWC1264QAG	Cooling: 12,000	

Features



	Model	Capacity (Btu/h.)	
Cooling	LWM1864QAG	Cooling: 18,000	

Features



## Comfort & Convenience

## LG Air Conditioners

Cooling Only Cooling & Heating



	Model	Capacity (Btu/h.)	
Cooling	LWJ0561AAG	Cooling: 5,000	
	LWJ0561ACG	Cooling: 5,000	

Features



	Model	Capacity (Btu/h.)	
Cooling	LWG0761AAG	Cooling: 7,000	
	LWG0960AAG	Cooling: 9,000	
	LWG0761BAG	Cooling: 7,000	
	LWG0960BAG	Cooling: 9,000	
	LWC076GGMM0	Cooling: 7,000	
	LWC096GGMM0	Cooling: 9,000	
	LWG0761BCG	Cooling: 7,000	
	LWG0960BCG	Cooling: 9,000	
LWG0761ACG	Cooling: 7,000		
LWG0961ACG	Cooling: 9,000		

Features











	Model	Capacity (Btu/h.)	
Cooling	LWC1264AAG	Cooling: 12,000	
	LWC1264BAG	Cooling: 12,000	
	LWC1264BCG	Cooling: 12,000	

Features



	Model	Capacity (Btu/h.)	
Cooling	LWM1863BAG	Cooling: 18,000	
	LWM2260BAG	Cooling: 22,000	
	LWN1862BAG	Cooling: 18,000	
	LWN2263BAG	Cooling: 24,000	
	LWM1863BCG	Cooling: 18,000	
	LWN1862BCG	Cooling: 18,000	
LWN2263BCG	Cooling: 24,000		

Features



# Specifications

## Single Split Wall Mounted Type ART COOL

Model		LS-C076Z*C0	LS-C096Z*C0	LS-C126U*D0	LS-H076Z*C0	LS-H096Z*C0	LS-H126U*D0
<b>Capacity</b>							
Cooling	[Btu/hr]	7,000	9,000	12,000	7,000	9,000	12,000
Heating	[Btu/hr]				7,300	9,300	12,500
<b>Electrical Parts</b>							
Voltage.Frequency/Phase	[V,Hz/ø]	220-240,50/1	220-240,50/1	220-240,50/1	220-240,50/1	220-240,50/1	220-240,50/1
Power Input.	Cooling/Heating [Watt]	660	900	1,200	660/640	900/870	1,250/1,200
Running Current.	Cooling/Heating [A]	3.0	4.0	5.5	3.0/2.9	3.9/3.8	5.7/5.6
<b>Performance</b>							
EER	[Btu/hr.W]	10.61	10.0	10.00	10.61	10.00	9.60
COP	[Btu/hr.W]				3.34	3.13	3.05
Air Circulation	In/Out [m <sup>3</sup> /min]	6.2/18	7.0/19	9.5/26	6.2/18	7.0/26	9.5/26
Moisture Removal	[l /hr]	1.0	1.2	1.5	1.0	1.2	1.5
Noise Level	[In/Out] [dB(A),High,1m]	32/46	34/46	36/46	32/46	34/46	36/46
<b>Features</b>							
PLASMA Air Purifying System		•	•	•[Dual]	•	•	•[Dual]
4 Way Auto Swing							
Gold Fin		•	•	•	•	•	•
Jet Cool		•	•	•	•	•	•
Temperature Control		Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor
CHAOS Wind	[Auto Wind]	•	•	•	•	•	•
Air Deflection		4-Way	4-Way	4-Way	4-Way	4-Way	4-Way
Steps	[Fan / Cool]	3/5	3/5	3/5	3/5	3/5	3/5
Air Direction Control (up & down)		Auto	Auto	Auto	Auto	Auto	Auto
Remote Controller.Type		Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD
Setting Temperature Range	[Cool]	18-30	18-30	18-30	18-30	18-30	18-30
Setting Temperature Range	[Heat]				16-30	16-30	
Temperature Increment		1	1	1	1	1	1
Self Diagnosis		•	•	•	•	•	•
Timer		24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF
Sleep Operation		•	•	•	•	•	•
Soft Dry Operation		•	•	•	•	•	•
Auto Restart		•	•	•	•	•	•
Defrost Operation					•	•	
Hot Start					•	•	
Compressor	[type]	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
<b>Installation &amp; Stuffing</b>							
Net Dimensions	Indoor WxHxD [mm]	899x272x143	899x272x143	1,030x290x153	899x272x143	899x272x143	1,030x290x153
	Outdoor WxHxD [mm]	575x525x260	770x540x245	770x540x245	575x525x260	770x540x245	770x540x245
Net Weight	Indoor/Outdoor [Kgs]	8/26	8/31	9/34	8/26	8/31	9/34
Stuffing Q'ty	With S/Parts [20ft/40ft]	125/260	102/216	96/207	125/260	102/216	96/207
	Without S/Parts [20ft/40ft]						
Service Valve	Liquid /Gas ø[mm]	6.35/9.52	6.35/9.52	6.35/12.7	6.35/9.52	6.35/9.52	6.35/12.7

Notes:Design and specifications are subject to change without prior notice for product improvement.

Model		LS-C186V*C0	LS-H186V*C0	LS-C096P*C0	LS-C126P*C0	LS-H096P*C0	LS-H126P*C0
<b>Capacity</b>							
Cooling	[Btu/hr]	18,000	18,000	9,000	11,000	9,000	11,000
Heating	[Btu/hr]		18,500			9,300	12,500
<b>Electrical Parts</b>							
Voltage.Frequency/Phase	[V,Hz/ø]	220-240,50/1	220-240,50/1	220-240,50/1	220-240,50/1	220-240,50/1	220-240,50/1
Power Input.	Cooling/Heating [Watt]	1,860	1,860/1,800	900	1,250	859/850	1,250/1,220
Running Current.	Cooling/Heating [A]	9.2	8.5/8.7	4.0	5.8	3.9/3.8	5.8/5.5
<b>Performance</b>							
EER	[Btu/hr.W]	9.68	9.68	10.0	8.80	10.24	8.80
COP	[Btu/hr.W]		3.01			3.2	3.0
Air Circulation	In/Out [m <sup>3</sup> /min]	12.0/42	12.0/42	7.0/26	8.7/26	7.0/26	8.7/26
Moisture Removal	[l /hr]	1.8	1.8	1.2	1.4	1.2	1.4
Noise Level	[In/Out] [dB(A),High,1m]	45/53	45/53	38/46	40/46	38/46	40/46
<b>Features</b>							
PLASMA Air Purifying System		•[Dual]	•	•	•	•	•
No Aging PLASMA Heat Exchange		•					
Tele-Control		•	•				
Gold Fin		•	•	•	•	•	•
Jet Cool		Thermistor	Thermistor	•	•	•	•
Temperature Control		•	•	Thermistor	Thermistor	Thermistor	Thermistor
CHAOS Wind	[Auto Wind]	4-Way	4-Way	•	•	•	•
Air Deflection		3/5	3/5	3-Way	3-Way	3-Way	3-Way
Steps	[Fan / Cool]	Auto	Auto	3/5	3/5	3/5	3/5
Air Direction Control (up & down)		Wireless LCD	Wireless LCD	Auto	Auto	Auto	Auto
Air Direction Control(left & right)		18-30	18-30				
Remote Controller.Type			16-30	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD
Setting Temperature Range	[Cool]	1	1	18-30	18-30	18-30	18-30
Setting Temperature Range	[Heat]					16-30	16-30
Temperature Increment		24Hr ON/OFF	24Hr ON/OFF	1	1	1	1
Self Diagnosis		•	•	•	•	•	•
Timer		•	•	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF
Sleep Operation		•	•	•	•	•	•
Healthy Dehumidification			•	•	•	•	•
Auto Restart		•	•	•	•	•	•
Compressor	[type]	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
<b>Installation &amp; Stuffing</b>							
Net Dimensions	Indoor WxHxD [mm]	928x522x147	928x522x147	570x568x137	570x568x137	570x568x137	570x568x137
	Outdoor WxHxD [mm]	870x655x320	870x655x320	575x525x260	770x540x245	770x540x245	770x540x245
Net Weight	Indoor/Outdoor [Kgs]	15/60	15/60	8.5/31	8.5/33	8.5/31	9/36
Stuffing Q'ty	With S/Parts [20ft/40ft]	54/117	54/117	88/189	88/189	88/189	88/189
	Without S/Parts [20ft/40ft]						
Service Valve	Liquid /Gas ø[mm]	6.35/12.7	6.35/12.7	6.35/9.52	6.35/12.7	6.35/9.52	6.35/12.7

Notes:Design and specifications are subject to change without prior notice for product improvement.

# Specifications

## Single Split Wall Mounted Type

Model		LS-Q076DDG	LS-Q096DDG	LS-R126FEG	LS-T246SEG	LS-Q096BDG	LS-R126BDG	LS-T186BDG	LS-T186CDG
<b>Capacity</b>									
Cooling	(Btu/hr)	7,000	9,000	12,000	24,000	9,000	12,000	18,500	18,500
Heating	(Btu/hr)								
<b>Electrical Parts</b>									
Voltage, Frequency/Phase	(V, Hz/ø)	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1
Power Input. Cooling/Heating	(Watt)	660	900	1,260	2,670	900	1,260	1,610	1,610
Running Current. Cooling/Heating	(A)	2.9	4.0	5.8	12.6	4.0	5.8	9.2	9.2
<b>Performance</b>									
EER	(Btu/hr.W)	10.6	10.0	9.5	9.0	10.0	9.5	9.5	11.5
COP	(Btu/hr.W)								
Air Circulation	In/Out (m <sup>3</sup> /min)	5.6/18	7.0/20	9.5/26	14.9/42	6.0/20	9.5/26	12.3/42	12.3/42
Moisture Removal	(l /hr)	1.0	1.0	1.5	2.88	1.0	1.5	2.2	2.2
Noise Level	(In/Out) (dB(A), High, 1m)				44/54	36/46	36/46	40/53	40/53
<b>Features</b>									
PLASMA Air Purifying System		•	•	•	•(Dual)	•	•	•(Dual)	•(Dual)
No Aging PLASMA Heat Exchange						•	•	•	•
Tele-Control		•(LED)	•(LED)	•(LCD)	•(LCD)				
Gold Fin		•	•	•	•	•	•	•	•
Jet Cool		•	•	•	•	•	•	•	•
Temperature Control		Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor
CHAOS Wind	(Auto Wind)	•	•	•	•	•	•	•	•
Air Deflection		4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way
Steps	(Fan / Cool)	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
Air Direction Control (up & down)		Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Air Direction Control (left & right)		Manual	Manual	Auto	Auto	Manual	Manual	Manual	Auto
Remote Controller.Type		Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD
Setting Temperature Range	(Cool)	18-30	18-30	18-30	18-30	18-30	18-30	18-30	18-30
Temperature Increment		1	1	1	1	1	1	1	1
Self Diagnosis		•	•	•	•	•	•	•	•
Timer		24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF
Sleep Operation		•	•	•	•	•	•	•	•
Healthy Dehumidification		•	•	•	•	•	•	•	•
Auto Restart		•	•	•	•	•	•	•	•
Compressor	(type)	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
<b>Installation &amp; Stuffing</b>									
Net Dimensions	Indoor WxHxD (mm)	824x260x155	824x260x155	900x285x156	1,090x314x172	824x260x155	900x285x156	1,090x314x172	1,090x314x172
	Outdoor WxHxD (mm)	564x525x265	564x525x265	770x540x245	870x655x320	564x525x265	770x540x245	870x655x320	870x655x320
Net Weight	Indoor/Outdoor (Kgs)	7/23	7/28	8/34	12/57	7/28	8/34	12/60	12/60
Stuffing Q'ty	With S/Parts (20ft/40ft)	127/267	127/267	97/208	62/131	127/267	97/208	62/131	62/131
	Without S/Parts (20ft/40ft)	128/267	128/267	98/210	63/132	128/267	98/210	63/132	63/132
Service Valve	Liquid /Gas ø(mm)	6.35/9.52	6.35/9.52	6.35/12.7	9.52/15.88	6.35/9.52	6.35/12.7	6.35/12.7	6.35/12.7

Model		LS-T246CAM	LS-C096RMD0	LS-C126RMD0	HS-C096RMD0	HS-C126RMD0	LS-Q096BBM	LS-R126CBM	LS-T186CBM	LS-T246CBM	LS-C096RMA0	HS-C096RMA0
<b>Capacity</b>												
Cooling	(Btu/hr)	24,000	9,000	12,000	9,000	12,000	18,000	24,000	24,000	9,000		
Heating	(Btu/hr)					9,300	13,000	19,000	24,000			
<b>Electrical Parts</b>												
Voltage, Frequency/Phase	(V, Hz/ø)	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1
Power Input. Cooling/Heating	(Watt)	2,700	700	1,120	900/870	1,260/1,230	1,860/1,870	2,700/2,650	790			
Running Current. Cooling/Heating	(A)	12.6	3.8	5.3	4.0/3.8	5.8/5.5	9.2/9.2	12.6/12.2	3.8			
<b>Performance</b>												
EER	(Btu/hr.W)	8.9	11.4	10.7	10.0/10.7	9.5	9.67	8.89	11.4			
COP	(Btu/hr.W)				3.14	3.09	2.98	2.65				
Air Circulation	In/Out (m <sup>3</sup> /min)	14.9/42	7.3/23	9.0/26	7.0/20	8.3/26	12.5/42	14.9/42	7.3/23			
Moisture Removal	(l /hr)	2.88	1.21	1.5	1.18	2.2	2.9	1.2				
Noise Level	(In/Out) (dB(A), High, 1m)	44/54	38/43	40/46	36/48	36/48	40/51	44/54	38/43			
<b>Features</b>												
PLASMA Air Purifying System		•(Dual)	•	•	•	•	•(Dual)	•(Dual)				
4-Way Auto Swing												
Gold Fin		•	•	•	•	•	•	•	•			
Jet Cool		•	•	•	•	•	•	•	•			
Temperature Control		Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor			
CHAOS Wind	(Auto Wind)	•	•	•	•	•	•	•	•			
Air Deflection		4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way			
Steps	(Fan / Cool)	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4			
Air Direction Control (up & down)		Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto			
Remote Controller.Type		Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD			
Setting Temperature Range	(Cool)	18-30	18-30	18-30	18-30	18-30	18-30	18-30	18-30			
Setting Temperature Range	(Heat)					16-30	16-30					
Temperature Increment		1	1	1	1	1	1	1	1			
Self Diagnosis		•	•	•	•	•	•	•	•			
Timer		24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF			
Sleep Operation		•	•	•	•	•	•	•	•			
Soft Dry Operation		•	•	•	•	•	•	•	•			
Auto Restart		•	•	•	•	•	•	•	•			
Deice Control	(Defrost)											
Hot Start												
Compressor	(type)	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary			
<b>Installation &amp; Stuffing</b>												
Net Dimensions	Indoor WxHxD (mm)	1,090x314x172	900x285x156	900x285x156	900x260x155	900x285x156	1,090x314x172	1,090x314x172	900x285x156			
	Outdoor WxHxD (mm)	870x655x320	770x540x245	770x540x245	770x540x245	770x540x245	870x655x320	870x655x320	740x624x270			
Net Weight	Indoor/Outdoor (Kgs)	12/57	8/34	7/33	8/34	8/35	12/58	12/59	8/34			
Stuffing Q'ty	With S/Parts (20ft/40ft)	62/131	97/208	97/208	127/267	97/208	62/131	62/131	97/208			
	Without S/Parts (20ft/40ft)	63/132	98/210	98/210	98/210	63/132	63/132	63/132	98/210			
Service Valve	Liquid /Gas ø(mm)	9.52/15.88	6.35/12.7	6.35/12.7	6.35/9.52	6.35/12.7	6.35/12.7	6.35/12.7	6.35/12.7			

Notes: Design and specifications are subject to change without prior notice for product improvement.

Model		LS-T246CDG	LS-Q096BAG	LS-R126CAG	LS-T186CAG	LS-T246CAG	LS-C096RGA0	HS-C096RGA0	HS-C126RGA0	LS-T186CAM
<b>Capacity</b>										
Cooling	(Btu/hr)	24,000	9,000	12,000	18,500	24,000	9,000	12,000	18,500	
Heating	(Btu/hr)									
<b>Electrical Parts</b>										
Voltage, Frequency/Phase	(V, Hz/ø)	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1
Power Input. Cooling/Heating	(Watt)	2,700	900	1,260	1,610	2,670	900	1,260	1,610	
Running Current. Cooling/Heating	(A)	12.6	4.0	5.8	9.2	12.6	4.0	5.8	9.2	
<b>Performance</b>										
EER	(Btu/hr.W)	8.9	10.0	9.5	11.5	8.9	10.0	9.5	11.5	
COP	(Btu/hr.W)									
Air Circulation	In/Out (m <sup>3</sup> /min)	14.9/42	7.0/20	9.5/26	12.3/42	14.9/42	7.0/20	9.5/26	12.3/42	
Moisture Removal	(l /hr)	2.88	1.0	1.5	2.2	2.88	1.0	1.5	2.2	
Noise Level	(In/Out) (dB(A), High, 1m)	44/54	36/46	36/46	40/53	44/55	36/46	36/46	40/51	
<b>Features</b>										
PLASMA Air Purifying System		•(Dual)	•	•	•(Dual)	•(Dual)	•	•	•(Dual)	
No Aging PLASMA Heat Exchange		•								
Gold Fin		•	•	•	•	•	•	•	•	
Jet Cool		•	•	•	•	•	•	•	•	
Temperature Control		Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	
CHAOS Wind	(Auto Wind)	•	•	•	•	•	•	•	•	
Air Deflection		4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	
Steps	(Fan / Cool)	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	
Air Direction Control (up & down)		Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	
Air Direction Control (left & right)		Auto	Manual	Auto	Auto	Auto	Auto	Auto	Auto	
Remote Controller.Type		Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	
Setting Temperature Range	(Cool)	18-30	18-30	18-30	18-30	18-30	18-30	18-30	18-30	
Temperature Increment		1	1	1	1	1	1	1	1	
Self Diagnosis		•	•	•	•	•	•	•	•	
Timer		24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	
Sleep Operation		•	•	•	•	•	•	•	•	
Healthy Dehumidification		•	•	•	•	•	•	•	•	
Auto Restart		•	•	•	•	•	•	•	•	
Compressor	(type)	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	
<b>Installation &amp; Stuffing</b>										
Net Dimensions	Indoor WxHxD (mm)	1,090x314x172	824x260x155	900x285x156	1,090x314x172	1,090x314x172	1,090x314x172	900x285x156	900x285x156	1,090x314x172
	Outdoor WxHxD (mm)	870x655x320	564x525x265	770x540x245	870x655x320	870x655x320	870x655x320	770x540x245	770x540x245	870x655x320
Net Weight	Indoor/Outdoor (Kgs)	12/57	7/28	8/34	12/					



# Specifications

## Single Split Wall Mounted Type

Model		LS-C096RGA0	LS-C126RGA0	LS-Q096AAG	LS-T186AAG	LS-T246AAG	LS-Q076ADG	LS-Q096ADG	LS-T186ADG	
Capacity		HS-C096RGA0	HS-C126RGA0							
Cooling	[Btu/hr]	9,000	12,000	9,000	18,500	24,000	7,000	9,000	18,500	
Heating	[Btu/hr]									
Electrical Parts										
Voltage, Frequency/Phase	[V, Hz/ϕ]	220-240.50/1	220-240.50/1	220-240.50/1	220-240.50/1	220-240.50/1	220-240.50/1	220-240.50/1	220-240.50/1	
Power Input	Cooling/Heating [Watt]	840	1,120	920	1,950	2,700	690	920	1,950	
Running Current	Cooling/Heating [A]	3.8	5.4	4.0	9.2	12.6	3.1	4.0	9.2	
Performance										
EER	[Btu/hr.W]	10.7	10.7	9.80	9.49	8.88	10.10	9.80	9.49	
COP	[Btu/hr.W]									
Air Circulation	In/Out [m <sup>3</sup> /min]	7.3/24	9.0/26	7.0/20	14/42	16/42	6.4/18	7.0/20	14/42	
Moisture Removal	[l /hr]	1.2	1.5	1.2	2.5	3.0	1.0	1.2	2.5	
Noise Level	[In/Out] [dB(A), High, 1m]	38/43	40/46	33/46	40/53	44/55	32/45	33/46	40/53	
Features										
No Aging PLASMA Heat Exchange							•	•	•	
4-Way Auto Swing										
Gold Fin		•	•	•	•	•	•	•	•	
Jet Cool		•	•	•	•	•	•	•	•	
Temperature Control		Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	
CHAOS Wind	[Auto Wind]	•	•	•	•	•	•	•	•	
Air Deflection		4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	
Steps	[Fan / Cool]	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	
Air Direction Control (up & down)		Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	
Remote Controller Type		Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	
Setting Temperature Range	[Cool]	18-30	18-30	18-30	18-30	18-30	18-30	18-30	18-30	
Setting Temperature Range	[Heat]									
Temperature Increment		1	1	1	1	1	1	1	1	
Self Diagnosis		•	•	•	•	•	•	•	•	
Timer		24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	
Sleep Operation		•	•	•	•	•	•	•	•	
Soft Dry Operation		•	•	•	•	•	•	•	•	
Auto Restart		•	•	•	•	•	•	•	•	
Deice Control	[Defrost]									
Hot Start					•					
Compressor	[type]	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	
Installation & Stuffing										
Net Dimensions	Indoor WxHxD [mm]	824x260x155	900x285x156	824x260x155	1,080x314x181	1,080x314x181	824x260x155	824x260x155	1,080x314x181	
	Outdoor WxHxD [mm]	770x540x245	770x540x245	770x540x245	870x655x320	870x655x320	525x564x265	770x540x245	870x655x320	
Net Weight	Indoor/Outdoor [Kgs]	7/33	8/37	7/33	12/60	12/60	7/23	7/33	12/60	
Stuffing Q'ty	With S/Parts [20ft/40ft]	99/219	98/209	99/219	63/132	63/132	128/267	99/219	63/132	
	Without S/Parts [20ft/40ft]									
Service Valve	Liquid /Gas ϕ[mm]	6.35/9.52	6.35/12.7	6.35/9.52	6.35/12.7	9.52/15.88	6.35/9.52	6.35/9.52	6.35/12.7	

Notes: Design and specifications are subject to change without prior notice for product improvement.

Model		LS-T246ADG	LS-T186ACL	LS-Q096AAL	LS-T186AAL	LS-T246AAL	LS-Q096ADL	LS-T186ADL	LS-T246ADL
Capacity									
Cooling	[Btu/hr]	24,000	18,500	9,000	18,500	24,000	9,000	18,500	24,000
Heating	[Btu/hr]								
Electrical Parts									
Voltage, Frequency/Phase	[V, Hz/ϕ]	220-240.50/1	220-240.50/1	220-240.50/1	220-240.50/1	220-240.50/1	220-240.50/1	220-240.50/1	220-240.50/1
Power Input	Cooling/Heating [Watt]	2,700	1,950	920	1,950	2,700	920	1,950	2,700
Running Current	Cooling/Heating [A]	12.6	9.2	4.0	9.2	12.6	4.0	9.2	12.6
Performance									
EER	[Btu/hr.W]	8.88	9.49	9.80	9.49	8.88	9.80	9.49	8.88
COP	[Btu/hr.W]								
Air Circulation	In/Out [m <sup>3</sup> /min]	16/42	14/42	7.0/20	14/42	16/42	7.0/20	14/42	16/42
Moisture Removal	[l /hr]	3.0	2.5	1.2	2.5	3.0	1.2	2.5	3.0
Noise Level	[In/Out] [dB(A), High, 1m]	44/55	40/53	33/46	40/53	44/55	33/46	40/53	44/55
Features									
No Aging PLASMA Heat Exchange		•					•	•	•
4-Way Auto Swing									
Gold Fin		•	•	•	•	•	•	•	•
Jet Cool		•	•	•	•	•	•	•	•
Temperature Control		Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor
CHAOS Wind	[Auto Wind]	•	•	•	•	•	•	•	•
Air Deflection		4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way
Steps	[Fan / Cool]	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
Air Direction Control (up & down)		Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Remote Controller Type		Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD
Setting Temperature Range	[Cool]	18-30	18-30	18-30	18-30	18-30	18-30	18-30	18-30
Setting Temperature Range	[Heat]								
Temperature Increment		1	1	1	1	1	1	1	1
Self Diagnosis		•	•	•	•	•	•	•	•
Timer		24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF
Sleep Operation		•	•	•	•	•	•	•	•
Soft Dry Operation		•	•	•	•	•	•	•	•
Auto Restart		•	•	•	•	•	•	•	•
Deice Control	[Defrost]								
Hot Start									
Compressor	[type]	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
Installation & Stuffing									
Net Dimensions	Indoor WxHxD [mm]	1,080x314x181	1,080x314x181	824x260x155	1,080x314x181	1,080x314x181	824x260x155	1,080x314x181	1,080x314x181
	Outdoor WxHxD [mm]	870x655x320	870x655x320	770x540x245	870x655x320	870x655x320	770x540x245	870x655x320	870x655x320
Net Weight	Indoor/Outdoor [Kgs]	12/60	12/60	7/33	12/60	12/60	7/33	12/60	12/60
Stuffing Q'ty	With S/Parts [20ft/40ft]	63/132	63/132	99/219	63/132	63/132	99/219	63/132	63/132
	Without S/Parts [20ft/40ft]								
Service Valve	Liquid /Gas ϕ[mm]	9.52/15.88	6.35/12.7	6.35/9.52	6.35/12.7	9.52/15.88	6.35/9.52	6.35/12.7	9.52/15.88

Notes: Design and specifications are subject to change without prior notice for product improvement.

# Specifications

## Single Split Wall Mounted Type

Model		LS-Q096AHL	LS-R126AHL	LS-T186AHL	LS-T246AHL	LS-M3060CL	LS-N3660CL	LS-H0561DL	LS-J0963CL
<b>Capacity</b>									
Cooling	(Btu/hr)	9,000	12,000	18,000	24,000	30,000	36,000	5,500	9,000
Heating	(Btu/hr)	9,300	13,000	19,000	24,000				
<b>Electrical Parts</b>									
Voltage, Frequency/Phase	(V, Hz/ø)	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1
Power Input	Cooling/Heating (Watt)	900/870	1,280/1,150	1,950/1,950	2,700/2,650	3,200	4,300	550	920
Running Current	Cooling/Heating (A)	3.9/3.8	5.8/5.2	8.7/8.7	12.2/11.9	15.5	22.0	2.5	4.0
<b>Performance</b>									
EER	(Btu/hr.W)	10.0	9.4	9.23	8.9	8.75	8.37	10	9.80
COP	(Btu/hr.W)	3.14	3.3	2.85	2.65				
Air Circulation	In/Out (m <sup>3</sup> /min)	7.0/20	9.5/25	14/42	16/42	21/58	26/60	4.2/18	7.0/20
Moisture Removal	(l /hr)	1.2	1.5	2.5	3.0	3.8	4.2	0.7	1.2
Noise Level	(In/Out) (dB(A), High, 1m)	33/46	36/46	40/53	44/55	46/56	47/57	33/46	33/46
<b>Features</b>									
No Aging PLASMA Heat Exchange									
4-Way Auto Swing						•	•	•	
Gold Fin									•
Jet Cool		•	•	•	•	•	•	•	•
Temperature Control	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor
CHAOS Wind	(Auto Wind)	•	•	•	•	•	•	•	•
Air Deflection		4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way
Steps	(Fan / Cool)	3/4	2/2	2/2	2/2	3/4	3/4	2/2	3/4
Air Direction Control (up & down)		Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Remote Controller Type		Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD
Setting Temperature Range	(Cool)	18-30	18-30	18-30	18-30	18-30	18-30	18-30	18-30
Setting Temperature Range	(Heat)	16-30	18-30						
Temperature Increment		1	1	1	1	1	1	1	1
Self Diagnosis		•	•	•	•	•	•	•	•
Timer		24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	7Hr ON/OFF	24Hr ON/OFF
Sleep Operation		•	•	•	•	•	•	•	•
Soft Dry Operation		•	•	•	•	•	•	•	•
Auto Restart		•	•	•	•	•	•	•	•
Deice Control	(Defrost)	•	•	•					
Hot Start		•	•	•					
Compressor	(type)	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
<b>Installation &amp; Stuffing</b>									
Net Dimensions	Indoor WxHxD (mm)	824x260x155	900x285x156	1,090x314x172	1,090x314x172	1,259x349x205	1,499x349x205	670x250x156	802x262x165
	Outdoor WxHxD (mm)	770x540x245	770x540x245	870x655x320	870x655x320	870x800x320	790x965x320	564x525x265	564x525x265
Net Weight	Indoor/Outdoor (Kgs)	7/33	8/37	12/60	12/60	23/75	25/80	6/23	7/28
Stuffing Q'ty	With S/Parts (20ft/40ft)	99/219	98/209	62/132	63/132	49/107	44/95	156/323	128/267
	Without S/Parts (20ft/40ft)					49/107	44/95		
Service Valve	Liquid /Gas ø(mm)	6.35/9.52	6.35/12.7	6.35/12.7	9.52/15.88	9.52/15.88	9.52/19.05	6.35/9.52	6.35/9.52

Notes: Design and specifications are subject to change without prior notice for product improvement.

Model		LS-L1261CL	LS-K1863CL	LS-J0962HL	LS-L1261HL	LS-K1863HL
<b>Capacity</b>						
Cooling	(Btu/hr)	12,000	18,000	9,000	12,000	18,000
Heating	(Btu/hr)			9,300	13,000	19,000
<b>Electrical Parts</b>						
Voltage, Frequency/Phase	(V, Hz/ø)	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1	220-240, 50/1
Power Input	Cooling/Heating (Watt)	1,190	1,950	900/870	1,280/1,150	1,860/1,870
Running Current	Cooling/Heating (A)	5.4	8.8	3.6/3.8	5.8/5.2	8.7/8.7
<b>Performance</b>						
EER	(Btu/hr.W)	10.10	9.50	10.00	9.45	9.23
COP	(Btu/hr.W)			3.14	3.31	2.85
Air Circulation	In/Out (m <sup>3</sup> /min)	9.5/25	14/42	7.0/20	9.5/25	14/42
Moisture Removal	(l /hr)	1.5	2.5	1.2	1.5	2.5
Noise Level	(In/Out) (dB(A), High, 1m)	36/46	40/53	33/46	36/46	40/53
<b>Features</b>						
PLASMA Air Purifying System						
No Aging PLASMA Heat Exchange						
Tele-Control						
Gold Fin		•		•	•	
Jet Cool	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor
Temperature Control		•	•	•	•	•
CHAOS Wind	(Auto Wind)	4-Way	4-Way	4-Way	4-Way	4-Way
Air Deflection		3/4	3/4	3/4	3/4	3/4
Steps	(Fan / Cool)	Auto	Auto	Auto	Auto	Auto
Air Direction Control (up & down)		Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD	Wireless LCD
Air Direction Control (left & right)		18-30	18-30	18-30	18-30	18-30
Remote Controller Type						
Setting Temperature Range	(Cool)	1	1	1	1	1
Setting Temperature Range	(Heat)	•	•	•	•	•
Temperature Increment		24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF	24Hr ON/OFF
Self Diagnosis		•	•	•	•	•
Timer		•	•	•	•	•
Sleep Operation		•	•	•	•	•
Healthy Dehumidification						
Auto Restart						
Compressor	(type)	Rotary	Recipro	Rotary	Rotary	Recipro
<b>Installation &amp; Stuffing</b>						
Net Dimensions	Indoor WxHxD (mm)	888x287x170	1,080x314x181	802x262x165	888x287x170	1,080x314x181
	Outdoor WxHxD (mm)	770x540x245	870x655x320	770x540x245	770x540x245	870x655x320
Net Weight	Indoor/Outdoor (Kgs)	9/34	12/57	7/33	9/35	12/59
Stuffing Q'ty	With S/Parts (20ft/40ft)	98/209	63/132	99/219	98/209	63/132
	Without S/Parts (20ft/40ft)					
Service Valve	Liquid /Gas ø(mm)	6.35/12.7	6.35/12.7	6.35/9.52	6.35/12.7	6.35/12.7

Notes: Design and specifications are subject to change without prior notice for product improvement.

# Specifications

## Window Type

Model		LWG0761QAG	LWC076GMM0	LWG0960QAG	LWC096GMM0	LWG0961PAG	LWC1265PAG	LWC1264QAG
<b>Capacity</b>								
Cooling	(Btu/hr)	7,000	7,000	9,000	9,000	9,000	12,000	12,000
<b>Electrical Data</b>								
Voltage, Frequency, Phase	(V, Hz, ϕ)	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1
Power Input	(Watt)	775	775	1,000	1,000	1,000	1,260	1,260
Running Current	(A)	3.4	3.4	4.2	4.2	4.2	5.6	5.6
E.E.R	(Btu/hr.W)	9.0	9.0	9.0	9.0	9.0	9.5	9.5
Air Circulation, IN/Out	(CMM)	5.8/11.5	5.8/11.5	5.8/11.5	5.8/11.5	5.8/11.5	7.9/18	7.9/18
Moisture Removal	(l /hr)	0.80	0.80	1.00	1.00	1.00	1.3	1.3
<b>Features</b>								
Temperature Control		Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor
Gold Fin		•	•	•	•	•	•	•
Auto-swing(Lefr & Right)		•	•	•	•	•	•	•
Remote Controller		•	•	•	•	•	•	•
Auto Restart		•	•	•	•	•	•	•
Reversible Open Grille		•	•	•	•	•	•	•
Timer(12-Hour off)	(12hr)	•	•	•	•	•	•	•
#Fan/Cool	(steps)	3/3	3/3	3/3	3/3	3/3	3/3	3/3
Air Deflection		4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way
Air Discharge		Side by Side	Side by Side	Side by Side	Side by Side	Side by Side	Side by Side	Side by Side
Air Ventilation		•	•	•	•	•	•	•
Slide in/out	(Chassis)	•	•	•	•	•	•	•
Compressor	(type)	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
<b>Installation &amp; Stuffing</b>								
Net Dimensions.(mm)	(WxHxD)	469x353x525	469x353x525	469x353x525	469x353x525	469x353x525	600x380x567	600x380x567
Net Weight	(Kgs)	30	30	31	31	31	43	43
Stuffing Q'ty	Without S/Parts (20ft/40ft)	200/419	200/419	200/419	200/419	200/419	135/300	135/300

Model		LWG0761BAG	LWC076GGB0	LWG0761BCG	LWG0960BCG	LWC096GGB0	LWG0960ACG	LWC1264AAG	LWC1264BAG
<b>Capacity</b>									
Cooling	(Btu/hr)	7,000	7,000	7,000	9,000	9,000	9,000	12,000	12,000
<b>Electrical Data</b>									
Voltage, Frequency, Phase	(V, Hz, ϕ)	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1
Power Input	(Watt)	775	775	775	1,000	1,000	1,000	1,260	1,260
Running Current	(A)	3.4	3.4	3.4	4.2	4.2	4.2	5.6	5.6
E.E.R	(Btu/hr.W)	9.0	9.0	9.0	9.0	9.0	9.0	9.5	9.5
Air Circulation, IN/Out	(CMM)	5.8/11.5	5.8/11.5	5.8/11.5	5.8/11.5	5.8/11.5	5.8/11.5	7.9/18	7.9/18
Moisture Removal	(l /hr)	0.80	0.8	0.8	1.0	1.0	1.0	1.3	1.3
<b>Features</b>									
Temperature Control		Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat
Gold Fin		•	•	•	•	•	•	•	•
Auto-swing(Lefr & Right)		•	•	•	•	•	•	•	•
Remote Controller		•	•	•	•	•	•	•	•
Auto Restart		•	•	•	•	•	•	•	•
Reversible Open Grille		•	•	•	•	•	•	•	•
Timer(12-Hour off)	(12hr)	•	•	•	•	•	•	•	•
#Fan/Cool	(steps)	2/3	2/3	2/3	2/3	2/3	2/3	2/3	2/3
Air Deflection		4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way
Air Discharge		Side by Side	Side by Side	Side by Side	Side by Side	Side by Side	Side by Side	Side by Side	Side by Side
Air Ventilation		•	•	•	•	•	•	•	•
Slide in/out	(Chassis)	•	•	•	•	•	•	•	•
Compressor	(type)	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
<b>Installation &amp; Stuffing</b>									
Net Dimensions.(mm)	(WxHxD)	469x353x525	469x353x525	469x353x525	469x353x525	469x353x525	469x353x525	600x380x567	600x380x567
Net Weight	(Kgs)	30	30	30	31	31	31	43	43
Stuffing Q'ty	Without S/Parts (20ft/40ft)	200/419	200/419	200/419	200/419	200/419	200/419	135/300	135/300

Model		LWM1864QAG	LWJ0561AAG	LWJ0561ACG	LWG0761AAG	LWG0960AAG	LWG0960BAG	LWG0761ACG
<b>Capacity</b>								
Cooling	(Btu/hr)	18,000	5,000	5,000	7,000	9,000	9,000	7,000
<b>Electrical Data</b>								
Voltage, Frequency, Phase	(V, Hz, ϕ)	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1
Power Input	(Watt)	2,250	625	625	775	1,000	1,000	775
Running Current	(A)	10.1	2.8	2.8	3.4	4.2	4.2	3.4
E.E.R	(Btu/hr.W)	9.1	8	8	9.0	9.0	9.0	9.0
Air Circulation, IN/Out	(CMM)	12/23	3.8/8.5	3.8/8.5	5.8/11.5	5.8/11.5	5.8/11.5	5.8/11.5
Moisture Removal	(l /hr)	2.10	1.4	1.4	0.80	1.00	1.00	0.80
<b>Features</b>								
Temperature Control		Thermistor	Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat
Gold Fin		•	•	•	•	•	•	•
Auto-swing(Lefr & Right)		•	•	•	•	•	•	•
Remote Controller		•	•	•	•	•	•	•
Auto Restart		•	•	•	•	•	•	•
Reversible Open Grille		•	•	•	•	•	•	•
Timer(12-Hour off)	(12hr)	•	•	•	•	•	•	•
#Fan/Cool	(steps)	3/3	2/2	2/2	2/3	2/3	2/3	2/3
Air Deflection		4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way
Air Discharge		Side by Side	Side by Side	Side by Side	Side by Side	Side by Side	Side by Side	Side by Side
Air Ventilation		•	•	•	•	•	•	•
Slide in/out	(Chassis)	•	•	•	•	•	•	•
Compressor	(type)	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
<b>Installation &amp; Stuffing</b>								
Net Dimensions.(mm)	(WxHxD)	660x428x675	472x312x380	472x312x380	469x353x525	469x353x525	469x353x525	469x353x525
Net Weight	(Kgs)	65	20	20	30	31	31	30
Stuffing Q'ty	Without S/Parts (20ft/40ft)	84/192	317/664	317/664	200/419	200/419	200/419	200/419

Notes: Design and specifications are subject to change without prior notice for product improvement.

Model		LWC1264BCG	LWM1863BAG	LWM2260BAG	LWN1862BAG	LWN2263BAG	LWM1863BCG	LWN1862BCG	LWN2263BCG
<b>Capacity</b>									
Cooling	(Btu/hr)	12,000	18,000	21,000	18,000	20,500	18,000	18,000	20,500
<b>Electrical Data</b>									
Voltage, Frequency, Phase	(V, Hz, ϕ)	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1
Power Input	(Watt)	1,260	2,250	2,470	2,460	2,520	2,250	2,460	2,520
Running Current	(A)	5.6	10.1	10.4	12.0	13.5	10.1	12.0	13.5
E.E.R	(Btu/hr.W)	9.5	9.1	8.5	7.3	9.3	9.1	7.3	9.3
Air Circulation, IN/Out	(CMM)	7.9/18	12/23	13/23	12/23	13.2/24	12/23	12/23	13.2/24
Moisture Removal	(l /hr)	1.3	2.10	2.4	1.8	2.4	2.10	1.8	2.4
<b>Features</b>									
Temperature Control		Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat	Adjustable Thermostat
Gold Fin		•	•	•	•	•	•	•	•
Auto-swing(Lefr & Right)		•	•	•	•	•	•	•	•
Remote Controller		•	•	•	•	•	•	•	•
Auto Restart		•	•	•	•	•	•	•	•
Reversible Open Grille		•	•	•	•	•	•	•	•
Timer(12-Hour off)	(12hr)	•	•	•	•	•	•	•	•
#Fan/Cool	(steps)	2/3	2/3	2/3	2/3	2/3	2/3	2/3	2/3
Air Deflection		4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way
Air Discharge		Side by Side	Side by Side	Side by Side	Side by Side	Side by Side	Side by Side	Side by Side	Side by Side
Air Ventilation		•	•	•	•	•	•	•	•
Slide in/out	(Chassis)	•	•	•	•	•	•	•	•
Compressor	(type)	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
<b>Installation &amp; Stuffing</b>									
Net Dimensions.(mm)	(WxHxD)	600x380x567	660x428x675	660x428x675	660x428x770	660x428x770	660x428x675	660x428x770	660x428x770
Net Weight	(Kgs)	43	65	66	59	59	65	59	59
Stuffing Q'ty	Without S/Parts (20ft/40ft)	135/300	84/192	84/192	84/176	84/176	84/192	84/176	84/176