

This Owner's Manual is provided and hosted by [Appliance Factory Parts](#).



# BROAN QTX110 HFLT Owner's Manual


[Shop genuine replacement parts for BROAN QTX110  
HFLT](#)



[Find Your BROAN HVAC Parts - Select From 1309 Models](#)

----- Manual continues below -----

# MODEL QTX110HFLT HEATER / FAN / FLUORESCENT LIGHT / NIGHT LIGHT

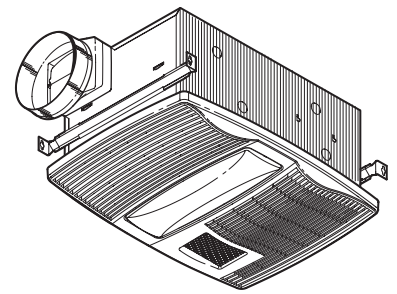

### FEATURES

#### GRILLE & LIGHTING:

- White polymeric grille
- Snap-in light diffusing lens
- Energy efficient lighting - uses (2) 18W (max.) high efficiency, GU24 based, fluorescent lamps (included) and 7W night light (not included)

#### VENTILATOR:

- Resilient anti-vibration mounts
- Plug-in, permanently lubricated motor
- Low sound, high performance blower wheel
- Polymeric, 6" round damper/duct connector - for optimal performance - with 1-1/8" long tapered sleeve and no metallic clatter

#### HEATER:

- 1500 watts, with metal blower wheel for efficient, even heating
- Plug-in, permanently lubricated motor - functions independent of ventilator

#### HOUSING:

- Rugged galvanized steel housing
- 7-5/8" height allows for 2" x 8" (nominal) joist installations
- Adjustable mounting brackets span up to 24"
- Suitable for use in insulated ceilings (Type I.C.).
- Use Model 77DV (Ivory) / 77DW (White) Four Function Control

#### NOTE:

- For installation in ceilings up to a 12/12 pitch.
- Installation in ceilings 9-foot high or less will provide maximum comfort.
- Do not mount this product in a wall.

### SPECIFICATIONS

VOLTS	AMPS	SONES	CFM	DUCT
120	13.5 *	0.9	110	6" Round

\* Requires a dedicated 20-Amp circuit.

### TYPICAL SPECIFICATION

Combination unit shall be Broan Model QTX110HFLT.

Unit shall have galvanized steel housing and adjustable mounting brackets.

Unit must be rated to handle (2) 18W (max.) high efficiency, GU24 based, fluorescent lamps.

Fan, heater, light, and night light shall be separately controllable. Motor shall be permanently lubricated.

Heater to deliver 1500 Watts of fan-forced heat.



Air delivery shall be no less than 110 cfm and sound levels no greater than 0.9 sones. All air and sound ratings shall be certified by HVI.

Unit shall be UL listed.

Combination unit to be suitable for use in insulated ceilings. (Type I. C.)



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

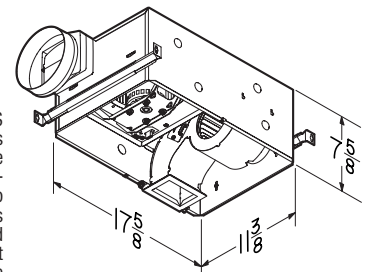

Broan-NuTone LLC Hartford, Wisconsin www.broan.com 800-558-1711

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date