


MODELS 679FLT & 680FLT FAN/LIGHTS

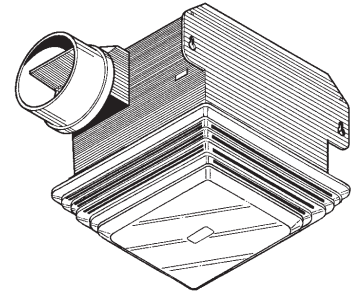

Quality and double-duty at each installation location.

FEATURES

GRILLE:

- Matte white polymeric - blends well with any decor
- Built-in light-diffusing lens accepts 13W fluorescent lamp*. Bulb not included.

BLOWER:

- Plug-in, permanently lubricated motor
- Polymeric blower wheel

HOUSING:

- Rugged, 26-gage galvanized steel construction
- Sturdy key-holed mounting brackets for quick, accurate installation
- Tapered, polymeric duct fitting with built-in backdraft damper for easy, positive duct connection and no metallic clatter

Model 2677H & 3677H: Rough-in housings for FL2679FT and FL2680FT finish assemblies (packed 4 per carton). 3677H housings include slide channels and mounting brackets.

NOTE: For installation in ceilings up to a 12/12 pitch.

U.L. Listed for use in insulated ceilings (Type I.C.)
 U.L. Listed for use over bathtubs and showers when connected to a GFCI protected branch circuit
 California Title 24 compliant.
 Use supply wiring rated for at least 90° C

SPECIFICATIONS

MODEL	VOLTS	AMPS*	SONES	CFM	DUCT
679FLT	120	1.3	3.5	70	4" Round
680FLT	120	1.3	4.0	100	4" Round

*Total Connected Load



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.


Broan-NuTone LLC, 926 West State Street, Hartford, WI 53027 (1-800-637-1453)

TYPICAL SPECIFICATION

Fan/Light unit shall be Broan Model 679FLT (680FLT).
 Unit shall have galvanized steel housing with dual integral mounting brackets. It shall be ducted to a roof or wall cap.
 Blower assembly shall be removable and have a permanently lubricated motor.
 Air delivery shall be no less than and sound level no greater than values listed in the "Specifications" chart on this sheet. Air and sound ratings shall be certified by HVI.
 Lamp shall be 13W fluorescent**.
 Unit shall be U.L. Listed for use over bathtubs and showers when connected to a GFCI protected branch circuit.
 Unit shall be U.L. Listed for use in insulated ceilings (Type I.C.).

**Use only one of the following 13W fluorescent lamps:

G.E.	F13DBX/SPX27/4P or F13DBX/SPX30/4P
PHILIPS	PL-C 13W/827/4P/ALTO or PL-C 13W/830/4P/ALTO
SYLVANIA	CF13DD/E/827 or CF13DD/E/830
NEMA Type	CFQ13W/G24q/827 or CFQ13W/G24q/830
BROAN	97016889

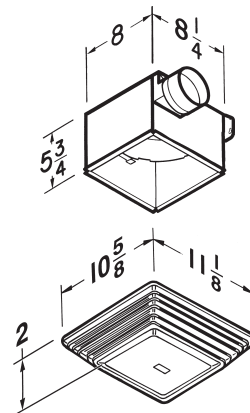

REFERENCE	QTY.	REMARKS	Project	
			Location	Architect
			Engineer	Contractor
			Submitted by	Date