

This Owner's Manual is provided and hosted by [Appliance Factory Parts](#).



BROAN QT236SS Owner's Manual


[Shop genuine replacement parts for BROAN QT236SS](#)



[Find Your BROAN HVAC Parts - Select From 1309 Models](#)

----- Manual continues below -----

QUIET HOOD™ CONVERTIBLE RANGE HOODS

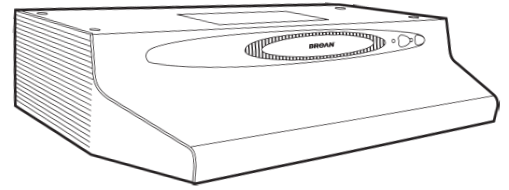

Broan's Quiet Range Hood has a patented air chamber design that significantly reduces noise up to 40 percent over comparable, conventional hoods.

FEATURES

- Three (3) ducting options:
 - 3¼" x 10", horizontal or vertical discharge
 - 7" round, vertical discharge
 - Non-ducted, using BPQTF filter (sold separately)
- Infinite, rotary speed control offers quiet fan operation
- Rotary light control
- Two, 40W, Type A-15 appliance bulbs provide bright cooktop lighting (bulbs not included)
- Translucent, polymeric light lens - easily removed for relamping
- Convenient night-light
- Thermally-protected, plug-in motor
- Electronically-balanced, polymeric fan blade
- Washable, aluminum mesh grease filter
- Optional non-ducted filter (BPQTF) for particulate and odor removal
- Keyhole mounting slots for easy installation
- Available in 30", 36", or 42" widths
- Powder-coated, baked enamel finishes in White, Almond, Biscuit, and Black, as well as Stainless Steel construction
- UL Listed and CSA certified

SPECIFICATIONS

| VOLTS | HZ. | AMPS | CFM | SONES | DUCT |
|-------|-----|------|-----|-------|---------------|
| 120 | 60 | 1.7 | 170 | 4.5 | 3¼" x 10" (H) |
| 120 | 60 | 1.7 | 200 | 4.5 | 3¼" x 10" (V) |
| 120 | 60 | 1.7 | 220 | 4.5 | 7" Round (V) |

MODEL NUMBERS

| FINISH | 30" WIDTH | 36" WIDTH | 42" WIDTH |
|-----------------|-----------|-----------|-----------|
| White | QT230WW | QT236WW | QT242WW |
| Almond | QT230AA | QT236AA | QT242AA |
| Biscuit | QT230BC | QT236BC | QT242BC |
| Black | QT230BL | QT236BL | QT242BL |
| Stainless Steel | QT230SS | QT236SS | QT242SS |

TYPICAL SPECIFICATION


The Range Hood shall be a Broan QT20000 Series. It will be 30", (36"), (42") wide and have a White, (Almond), (Biscuit), (Black), (Stainless Steel) finish.

The hood must be convertible between 3¼" x 10", 7" round, and non-ducted discharges. It will use a washable aluminum grease filter (ducted discharge) as well as a non-ducted, particle and odor filter (non-ducted discharge).

The motor assembly shall have a thermally-protected, plug-in motor, and a one-piece polymeric fan blade. Fan speed to be controlled by an infinite rotary speed control.

Cooktop lighting to be provided by two (2) 40W, A-15 type appliance bulbs. Bulbs will be operated using a rotary control with night-light feature.

Hood to be UL listed and CSA certified.

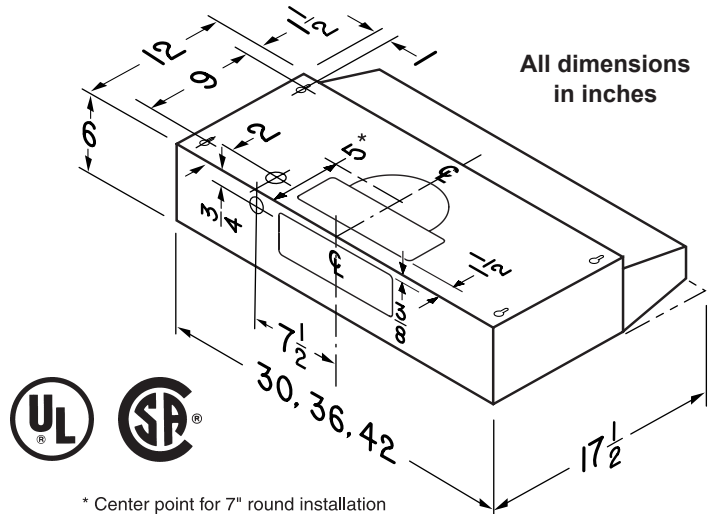

* Center point for 7" round installation



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

Broan-NuTone LLC, 926 West State Street, Hartford, WI 53027 (1-800-637-1453)

| REFERENCE | QTY. | REMARKS | Project |
|-----------|------|---------|--|
| | | | Location |
| | | | Architect |
| | | | Engineer |
| | | | Contractor |
| | | | Submitted by Date |