

# ADAMS



## SPEEDFLAME

### Power Gas Burner

#### CAPACITIES 50 - 850,000 BTU/HR

#### SPECIAL FEATURES:

- *4" Diameter Blast Tube*
- *Spark Ignition - No Pilot*
- *Fits the Smallest Enclosures*
- *Fires in to Small Combustion Chambers with Increased Efficiency*
- *Easily Accessible Air & Firing Rate Adjustment*
- *Pressure Switch Ensures Blower Operation*
- *High Static Pressure Capabilities Assures Firing Even Under Adverse Conditions*
- *Completely Factory Wired for Ease of Installation*
- *External Connection for Thermostat or Controller*

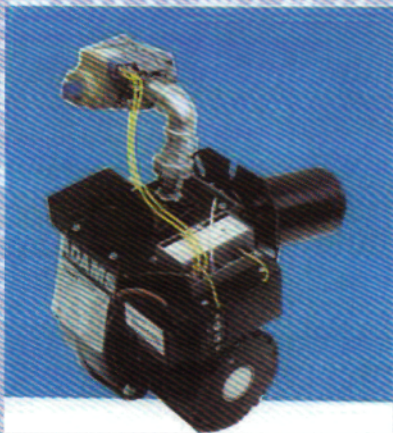

**THE BURNER FOR EVERY APPLICATION**

# ADAMS


## SPEEDFLAME Power Gas Burner

Combination Gas Valve

Honeywell Electronic Primary Control - Supervises flame proving within 4 seconds .8 second relight capability. Senses flame by rectification.

Pressure switch ensures blower operation.

Flame Retention Head - ADAMS time-proven, precision head positively locks the flame on the burner head to optimize efficient burner performance.

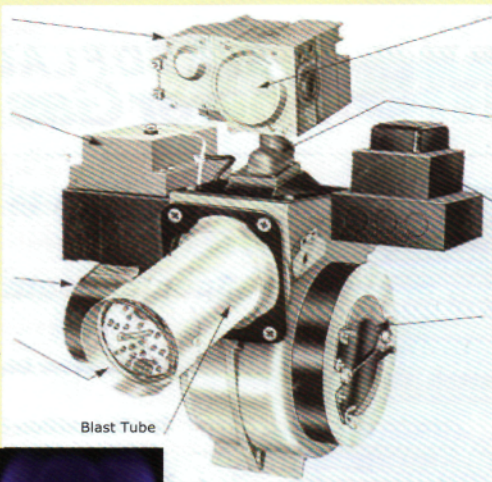

### Model G2T 50 - 850,000 BTU/HR

**Natural Gas**

Model	Maximum BTU/HR	Minimum
G2T-300	300,000	50,000
G2T-600	600,000	50,000
G2T-850	850,000	200,000


**LP Gas**

G2T-400LP	400,000	50,000
G2T-850LP	850,000	200,000



Height 17" - Width 13" - Depth Chassis Only 8"  
Usable Tube Length 8" with Mounting Flange -  
4" Diameter Tube

Patented Vacuum Mixing Method  
ADAMS Innovative vacuum mix of  
air and fuel gives you the ultimate  
in combustion performance.

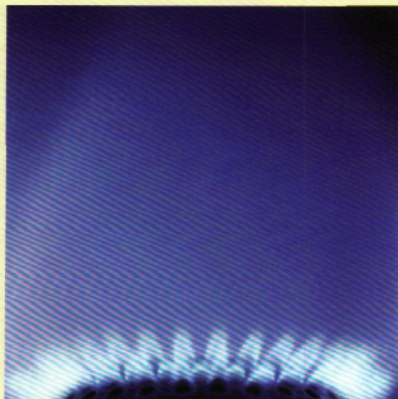

Available from:

# ADAMS

**MANUFACTURING COMPANY**

9790 Midwest Ave. • Cleveland, Ohio 44125  
(216) 587-6801  
adamsx@att.net

www.adamsmanufacturing.com