CS SERIES SIDE DISCHARGE

PROJECT	
LOCATION	
ARCHITECT	
ENGINEER	
CONTRACTOR	
SUBMITTED BY	DATE

		ELECTRICAL SPECIFICATIONS			PERFORMANCE										
MODEL NUMBER	INDUSTRY STANDARD CFM RATING	MOTOR H.P.	MOTOR VOLTAGE	MOTOR SPEED	0"SP	.1"SP	.2"SP	.3"SP	.4"SP	.5"SP	.6"SP	.7"SP	.8"SP	.9"SP	1."SP
CS75/85	7500	3/4	115 or 230 115 or 230 208-230/460	1 2 1	5998	5807	5500	5181	4872	4518	4173	3738	NR	NR	NR
	8500	1	115 or 230 208-230/460	1 & 2 1	6606	6435	6159	5894	5583	5273	4992	4708	4380	4026	NR
CS11000	11000	1	115 or 230 208-230/460	1 & 2	7966	7343	6783	6063	5578	5092	4160	3699	3146	1995	NR
CS13000	13000	1 1/2	115 or 230 208-230/460	1	10200	9725	9315	8920	8370	7650	7120	6520	5905	4700	4295
CS15000	15000	2	115 or 230 208-230/460	1	10970	10470	10185	9710	9300	9000	8770	8315	7345	6290	5820
CS16000	16000	3	208-230/460	1	12630	12330	11850	11535	11405	11180	10805	10415	10120	9610	9545

MODEL CS11/16

SIDE VIEW | FRONT VIEW | BOTTOM VIEW

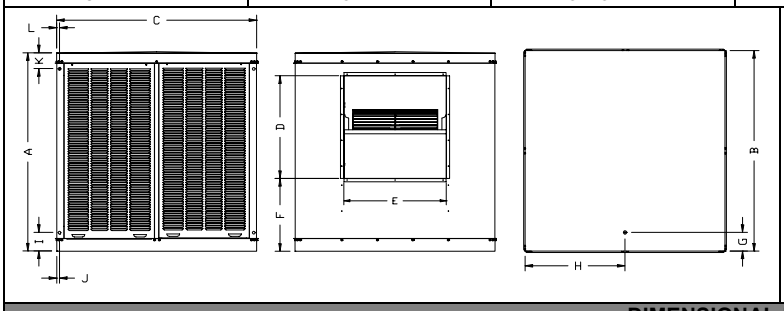

MODEL CS75/85

SIDE VIEW | FRONT VIEW | BOTTOM VIEW

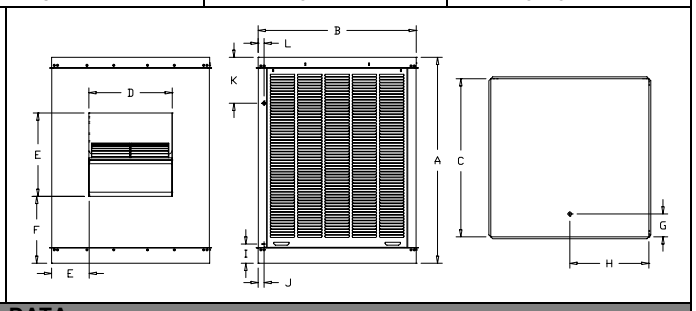

DIMENSIONAL DATA

MODEL NUMBER	BASIC UNIT			DUCT OPENING			DRAIN OUTLET		WATER INLET		POWER INLET	
	A	B	C	D	E	F	G	H	I	J	K	L
CS75/85	54 1/4	41 1/4	41 1/4	21 3/4	21 3/4	17	6	20 1/2	5 3/4	1 1/2	4 3/4	1 1/2
CS11000 CS13000 CS15000 CS16000	60	56	56	31 3/4	31 3/4	22	4	28	7	4	5	5 1/2

MODEL NUMBER	WATER INLET DIAMETER	DRAIN OUTLET DIAMETER	POWER INLET DIAMETER	BLOWER WHEEL	BLOWER PULLEY DIAMETER	MOTOR PULLEY DIAMETER	BELT	FILTER SIZE & (#)	SHIPPING WEIGHT	OPERATING WEIGHT
CS75/85	7/8	3/4	7/8	22 X19 X1	14	3 1/2	A73	36 X 48 (3)	405	550
CS11000	1/4	3/4	7/8	25 X 23 X 1 3/16	15	3 1/4	4L880	24 X 56 (6)	660	1030
CS13000							A87			
CS15000						4	A88			
CS16000							A89			

RECOMMENDATIONS

MODEL	QTY	CFM	STAT. PRES.	MOTOR	HP	SPEED	VOLTAGE	PHASE	OPTIONAL ACCESSORIES

02/2004