

This Owner's Manual is provided and hosted by [Appliance Factory Parts](#).



FANTECH ATMO-150-E Owner's Manual

[Shop genuine replacement parts for FANTECH
ATMO-150-E](#)



[Find Your FANTECH Fan Parts - Select From 108 Models](#)

----- Manual continues below part list -----

Available Replacement Parts for FANTECH ATMO-150-E

| | |
|-------------------------------|--|
| 05000436A0 | Utility Drawer Slide (Discontinued) (Di |
| ECO-TOUCH-IAQ | Touchscreen multi-function dehumidistat, |

ATMO™ 150E

Fresh Air Appliance (Energy Recovery Ventilator)

Product #: 463890



Fantech's, ATMO 150E is an Energy Recovery Ventilator designed for higher static pressure applications. The unit brings a continuous supply of fresh air into a home while exhausting an equal amount of contaminated air. The energy recovery core at the center of the unit transfers heat and moisture from incoming air to the outgoing air that was cooled and dried by the building's air conditioner.

Features

- Compact design
- Fans with backward curved blade
- Electrostatic filters (washable)
- ERV core transfers both heat and humidity
- Anti-microbial material
- Withstands freezing
- AHRI certified
- Removable screw terminal for easy connection with external access
- Lightweight 48 lbs (21Kg)
- Multiple speed operation

Optional Controls

- ECO-Touch™ – Programmable Touch Screen Wall Control
- ECO-Feel™ – Automatic IAQ Control
- EDF7 – Electronic multi-function dehumidistat
- EDF1 – Multi-function control
- RTS-W – Wireless 20/40/60 minute timer
- RTS5 – 20/40/60 minute over-ride
- RTS2 – 20 minute over-ride
- MDEH1 – Dehumidistat

Specifications

- Duct size – 6" (152 mm)
- Voltage/Phase – 120/1
- Power rated – 168 W
- Amp – 1.4 A
- Average airflow – 160 cfm (76 L/s)
@ 0.4" P_s (100Pa)

Fans

Two (2) factory-balanced fans with backward curved blades. Motors come with permanently lubricated, sealed ball-bearings to guarantee long life and maintenance-free operation.

Energy Recovery Core

Energy recovery core made from water vapor transport durable polymer membrane that is highly permeable to humidity. The ERV core is freeze tolerant and water washable. Core dimensions are 12" x 12" (305 x 305mm) with a 10" (254mm) depth.

Defrost

A preset defrost sequence is activated at an outdoor air temperature of 14°F (-10°C) and lower. During the defrost sequence, the supply blower shuts down & the exhaust blower switches into high speed to maximize the effectiveness of the defrost strategy. The unit then returns to normal operation, and continues cycle.

Serviceability

Core, filters, fans and drain pan can be easily accessed through latched door. Core conveniently slides out on our new easy glide core guides. 17" (432 mm) of clearance is recommended for removal of core.

Case

22 gauge galvanized steel cabinet with a pre-painted steel corrosion resistant door.

Insulation

Cabinet is fully insulated with 3/4" (19mm) high density expanded polystyrene.

Filters

Two (2) washable electrostatic panel type air filters 10" (254mm) x 11.9" (302mm) x 0.125" (3mm).

Controls

External three (3) position (Low/Stand By/Medium) rocker switch that will offer continuous ventilation. Fantech offers a variety of external controls. (see controls)


Installation

Unit is typically hung by using installation kit supplied with unit. Mounting chains inserted on hooks located on top four (4) corners of unit. An optional wall bracket is available.

Warranty

5 year on core, 7 year on motors, and 5 year on parts.

Dimensions & Airflow

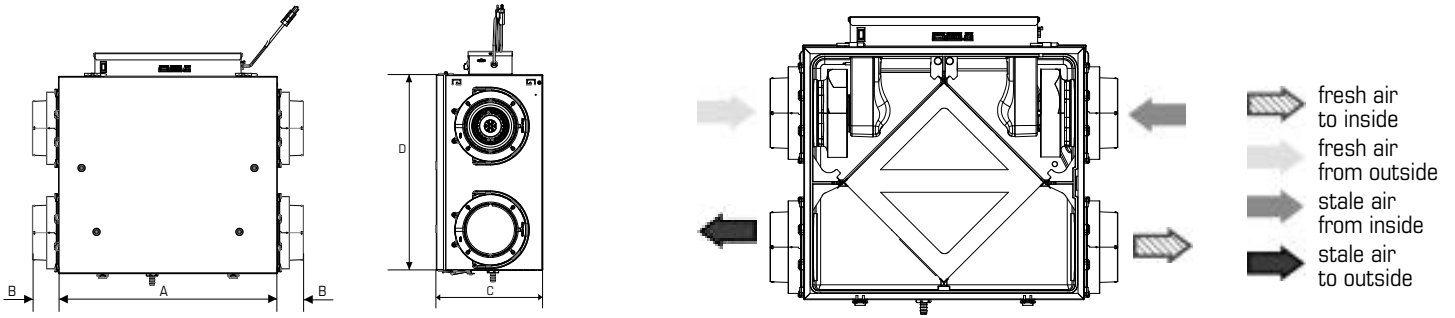


| Model | A | | B | | C | | D | |
|-------|----|----|----|----|----|----|----|----|
| | in | mm | in | mm | in | mm | in | mm |

ATMO 150E 23 7/8 606 29 1/2 750 11 11/16 423 21 7/16 545

Clearance of 17" (432 mm) in front of the unit is recommended for removal of core. All units feature three foot plug-in power cord with 3-prong plug.

Ventilation Performance

| in.wg. (Pa) | 0.2 (50) | 0.4 (100) | 0.6 (150) | 0.8 (200) | 1.0 (250) |
|-----------------------|-----------|-----------|-----------|-----------|-----------|
| | cfm (L/s) | cfm (L/s) | cfm (L/s) | cfm (L/s) | cfm (L/s) |
| Net supply airflow | 188 (89) | 160 (76) | 132 (62) | 104 (49) | 76 (36) |
| Gross supply airflow | 190 (90) | 162 (77) | 132 (62) | 106 (50) | 78 (37) |
| Gross exhaust airflow | 186 (88) | 158 (75) | 131 (62) | 104 (49) | 80 (38) |

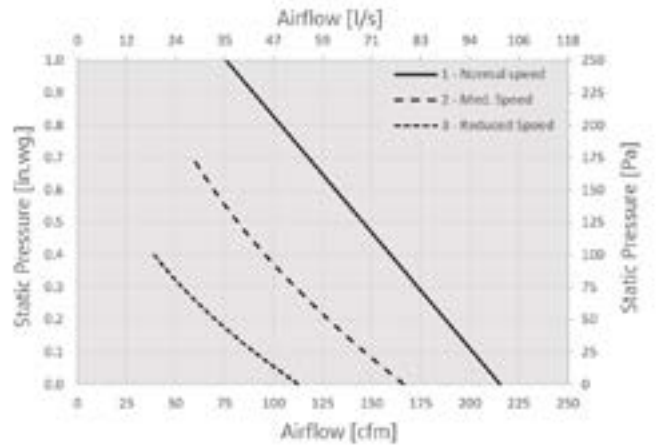

Energy performance

| | Supply temperature | | Net airflow | | Consumed Power | Net effectiveness | | | |
|---------|--------------------|-----|-------------|-----|----------------|-------------------|----------------|--------------------------------|---------------------------------------|
| | °F | °C | cfm | L/s | | Sensible | Total Recovery | Apparent Sensible ¹ | Latent recovery/ moisture transfer |
| | | | | | % | % | % | | |
| Heating | 32 | 0 | 65 | 31 | 50 | 75 | | 84 | 0.50 |
| | 32 | 0 | 85 | 40 | 60 | 73 | | 81 | 0.56 |
| | 32 | 0 | 106 | 50 | 76 | 71 | | 78 | 0.53 |
| Cooling | -13 | -25 | 65 | 31 | 48 | 60 | | 81 | 0.47 |
| | 95 | 35 | 64 | 30 | 52 | | 60 | 75 | 0.60 |

¹ Not an HVI certified value

Requirements and standards

- Complies with the UL 1812 requirements regulating the construction and installation of Heat Recovery Ventilators
- Complies with the CSA C22.2 no. 113 Standard applicable to ventilators
- Complies with the CSA F326 requirements regulating the installation of Heat Recovery Ventilators
- Energy Recovery Core is certified for mold and bacteria resistance
- Technical data was obtained from published results of test relating to CSA C439 Standards

Contacts

| | |
|---------------------|-------------------|
| Submitted by: _____ | Date: _____ |
| Quantity: _____ | Model: _____ |
| Project #: _____ | |
| Comments: _____ | |
| Location: _____ | |
| Architect: _____ | |
| Engineer: _____ | Contractor: _____ |

Distributed by:

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net

Canada 50 Kanalfakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech, reserves the right to modify, at any time and without notice, any or all of its products' features, designs, components and specifications to maintain their technological leadership position.



fantech[®]
a systemair company