


EVERY HOME NEEDS A

HERO  [®]

FRESH AIR IS OUR SUPER POWER

INTRODUCING...

ATMO  [™]

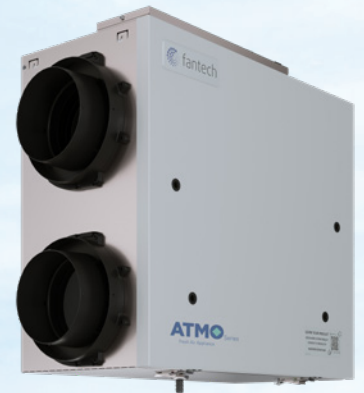

HERO[®] & ATMO[™] SERIES
Fresh Air Appliance

 **fantech** [®]
a systemair company

HERO® & ATMO™ SERIES PRODUCT LINE

HERO®

HEAT RECOVERY MODEL	HERO 120H	HERO 150H	HERO 200H	HERO 150H-EC	HERO 250H-EC
Average airflow (cfm (L/s) @ 0.4" in.wg.)	119 (56)*	161 (76)	218 (103)	176 (83)	263 (124)
Voltage / Phase (V/~)	120/1	120/1	120/1	120/1	120/1
Duct connection size (in (mm))	5 (127)	6 (152)	6 (152)	6 (152)	6 (152)
Consumed Power: High/Low (W)	165/60	180/60	210/88	110/30	230/40
Max sensible recovery efficiency	80	80	80	82	82
Max current (A)	1.2	1.4	2.0	3.0	6.4
Defrost cycle	Recirculation	Recirculation	Recirculation	Recirculation	Recirculation
Height (in (mm))	24 1/4 (616)	24 7/8 (632)	24 7/8 (632)	24 7/8 (632)	24 7/8 (632)
Depth (in (mm))	11 1/2 (292)	13 3/8 (340)	15 3/8 (391)	13 3/8 (340)	15 3/8 (391)
Width (in (mm))	23 1/4 (591)	27 7/8 (708)	27 7/8 (708)	27 7/8 (708)	27 7/8 (708)
Shipping weight (Kg (lbs))	21 (47)	27 (59)	29 (64)	27 (58)	28 (62)

*Average airflow (@0.4 in.wg.)

ATMO™

HEAT & ENERGY RECOVERY MODEL	ATMO 150H	ATMO 150E	ATMO 200H	ATMO 200E
Average airflow (cfm (L/s) @ 0.4" in.wg.)	162 (76)*	160 (76)*	200 (94)*	200
Voltage / Phase (V/~)	120/1	120/1	120/1	120/1
Duct connection size (in (mm))	6 (152)	6 (152)	6 (152)	6 (152)
Consumed Power: High/Low (W)	141/61	141/61	141/61	141/61
Max sensible recovery efficiency	75	75	75	75
Max current (A)	1.4	1.4	1.4	1.4
Defrost cycle	Fan Shutdown	Fan Shutdown	Fan Shutdown	Fan Shutdown
Height (in (mm))	21 7/16 (545)	21 7/16 (545)	21 7/16 (545)	21 7/16 (545)
Depth (in (mm))	11 11/16 (297)	11 11/16 (297)	16 5/8 (422)	16 5/8 (422)
Width (in (mm))	23 7/8 (606)	23 7/8 (606)	23 7/8 (606)	23 7/8 (606)
Shipping weight (Kg (lbs))	22 (47)	23 (51)	24 (53)	28 (62)

*Average airflow (@0.4 in.wg.)

HERO® & ATMO™ SERIES

by Fantech



The HERO® & ATMO™ Series are the most powerful partners in your fight against indoor air quality villains. These appliances are engineered with powerful performance in mind.



Our completely re-engineered appliances deliver a minimum of 75% of sensible recovery efficiency (SRE) in every model.



At the heart of the HERO unit stands the counterflow core providing exceptional performance.



At the heart of the ATMO unit stands the innovative cross-flow core providing superior performance.



Need to quickly reach internal components for maintenance? Simple! All the parts easily slide out for easy access in a flash.



A properly balanced fresh air appliance makes your A/C & Heating units more efficient and lowers homeowners energy bills.



With air balancing port on the front door, installation becomes a breeze.



Quiet operation. It's what you don't hear that counts.

A HEALTHIER HOME

Your airtight home is designed for energy efficiency by keeping the outdoor weather conditions out. But it's also keeping unhealthy and harmful elements in.

In fact, the air you breathe in your home can be up to 70% more polluted than outdoor air. Now consider that you spend most of your time indoors.

A Fresh Air appliance can ventilate your entire home with fresh outdoor air up to 20 times per day while recovering 80% of the energy in the process.



COMBUSTION SOURCES

Gas & Oil
Kerosene
Wood Stoves
Fireplaces
Tobacco Smoke




OTHER SOURCES

Pet Dander
Dust Mites
Mold
Virus



CHEMICAL PRODUCTS

Cleaning Products
Glues Pastes
Personal Care Products



OUTDOOR SOURCES

Radon
Pesticides
Pollen
Outdoor Air Pollution



BUILDING MATERIALS

Insulation
Paint & Wood Finishes
Carpet
Pressed Wood Product

WHEN YOUR HOME IS NOT PROPERLY VENTILATED, YOU ARE SURROUNDED BY INDOOR AIR POLLUTANTS


POWERFUL FEATURES

HERO®

PLASTIC COLLAR SHROUDS
with integrated backdraft prevention.

WALL MOUNT SYSTEM
with optional ceiling chain mount.

COUNTERFLOW CORE
providing up to 80% of energy transfer

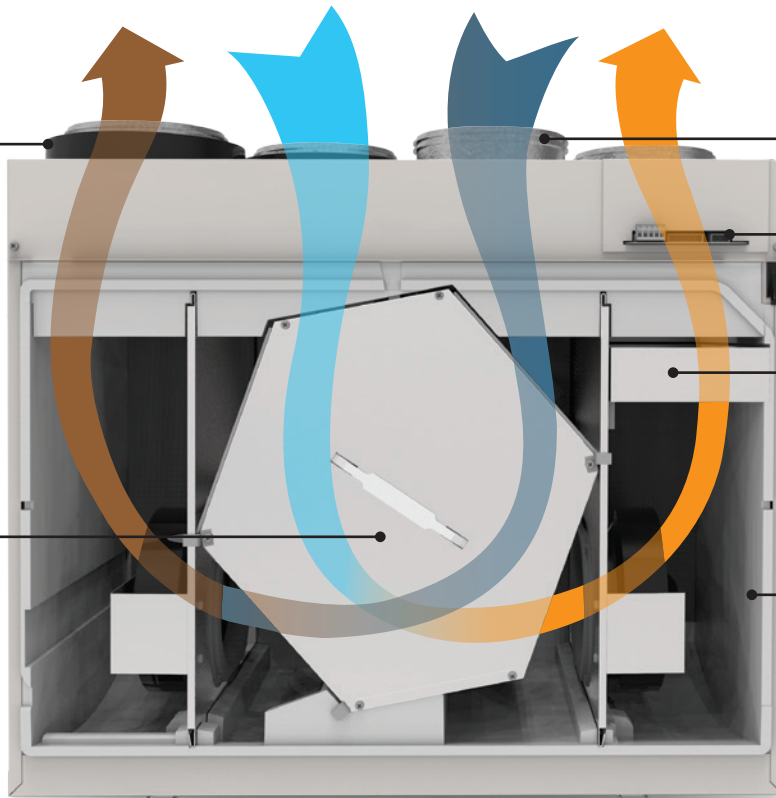

ROUND METAL COLLARS
with rubberized duct seals.

ELECTRICAL BOX
external access with easy connectors.

INTEGRATED MERV-8 FILTER
for cleaner home air in your entire home environment.


INJECTED FOAM CABINET
UL rated with improved aerodynamics, insulation and sound proofing.

ATMO™

ISF REVOLUTIONARY COLLAR SYSTEM
manipulate duct by sliding the collar system

CHAIN STANDARD MOUNT
with optional wall bracket

CROSSFLOW CORE
providing up to 75% of energy transfer

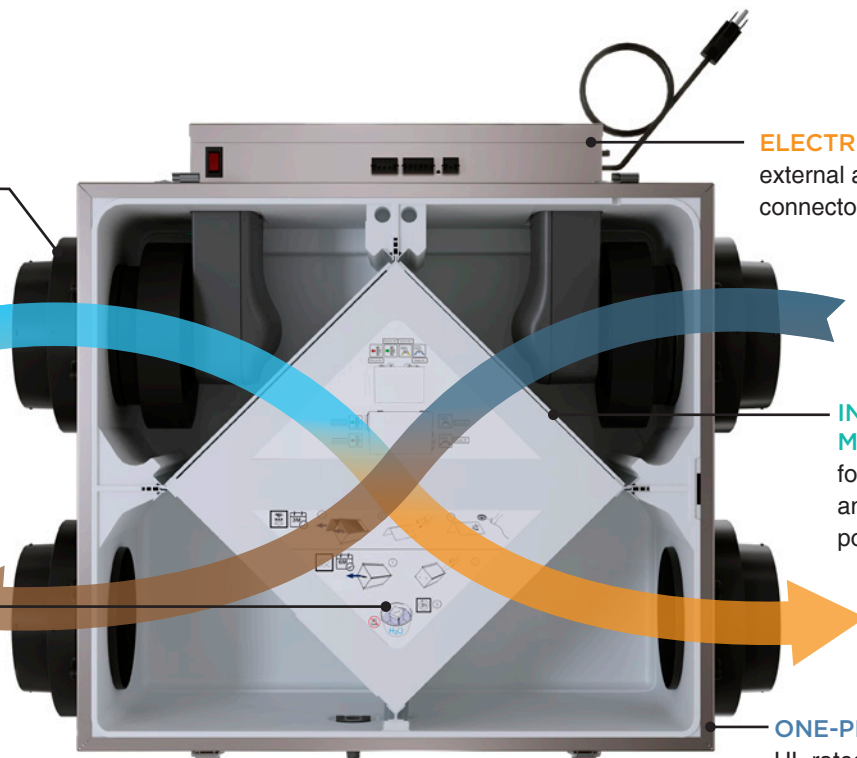

ELECTRICAL BOX
external access with easy connectors.

INTEGRATED MERV-3 FILTER
for unobstructed airflow and reducing textile fibers, pollen and dust mites.

ONE-PIECE FOAM CABINET
UL rated with improved aerodynamics, insulation and sound proofing.

EVERY HERO NEEDS A SIDEKICK TO HELP WITH THE FIGHT FOR BETTER INDOOR AIR QUALITY

FILTRATION SIDEKICKS

For that extra BOOST of filtration power, the HERO® and ATMO™ series can rely on the variety of optional Filter sidekicks.

Sizing your HERO and ATMO unit with filters may affect the airflow, please consider added static pressure when determining desired airflow. Filter type will vary in static pressure.









MERV13

MERV8

SUPER CONTROLS

No matter what your situation calls for we've got you covered with our amazing controls for any kind of Fresh Air Appliance project.

Model	ECO-TOUCH® IAQ	EDF8	ECO-FEEL®	EDF3	TIMERS	
					RTS-W*	RTS4
						
VOC sensing	•		•			
Single Family Residential	•	•	•	•	•	•
Multi-Family Residential	•	•	•	•	•	•

*This timer can only be paired to a Fantech Fresh Air Appliance via the ECO-Touch® IAQ

DISTRIBUTED LOCALLY BY:

CANADA CUSTOMER SUPPORT
800.565.3548
CANADAsupport@fantech.net

SEND ORDERS
CANADAorders@fantech.net

US CUSTOMER SUPPORT
800.747.1762
USsupport@fantech.net

SEND ORDERS
USorders@fantech.net

