




LG

REFRIGERATOR

SERVICE MANUAL

CAUTION
BEFORE SERVICING THE PRODUCT,
READ THE SAFETY PRECAUTIONS IN THIS MANUAL.

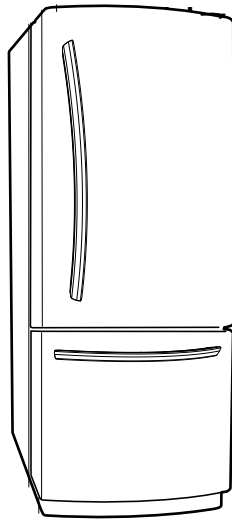

MODELS:
LBC22520**

CONTENTS

SAFETY PRECAUTIONS	2
1. SPECIFICATIONS	3
2. PARTS IDENTIFICATION	4
3. DISASSEMBLY	5
3.1 Door	5
3.2 Door Switch	5
3.3 Fan and Fan Motor	6
3.4 Defrost Control Assembly	6
3.5 Lamp	6
3.6 Control Box refrigerator	6
3.7 Multi Duct	6
4. ADJSUTMENT	7
4.1 Compressor	7
4.2 PTC-Starter	7
4.3 OLP (Overload Protector)	8
4.4 To remove the PTC cover	8
5. CIRCUIT DIAGRAM	9
6. TROUBLESHOOTING	10
6.1 Compressor and electrical components	10
6.2 PTC AND OLP	11
6.3 Other electrical components	12
6.4 Service diagnosis chart	13
6.5 Refrigerator cycle	14
7. OPERATION PRINCIPLE AND REPAIR METHOD OF ICEMAKER	16
7.1 Operation Principle	16
7.2 Icemaker functions	17
7.3 Defect diagnosis functions	18
8. DESCRIPTION OF FUNCTION & CIRCUIT OF MICOM	19
8.1 Function	19
8.2 PCB Function	23
8.3 Resistance specification	31
8.4 Troubleshooting	32
8.5 Main PWB assembly and parts list	34
8.6 PWB diagram	37
9. EXPLODED VIEW & REPLACEMENT PARTS LIST	39

SAFETY PRECAUTIONS


Please read the following instructions before servicing your refrigerator.

1. Check the refrigerator for current leakage.
2. To prevent electric shock, unplug before servicing.
3. Always check line voltage and amperage.
4. Use standard electrical components.
5. Don't touch metal products in the freezer with wet hands. This may cause frostbite.
6. Prevent water from spilling on to electrical elements or the machine parts.
7. Before tilting the refrigerator, remove all materials from on or in the refrigerator.
8. When servicing the evaporator, wear gloves to prevent injuries from the sharp evaporators fins.
9. Service on the refrigerator should be performed by a qualified technician. Sealed system repair must be performed by a CFC certified technician.

1. SPECIFICATIONS

MODELS		LBC22520**
SPECIFICATIONS		
GENERAL FEATURES	CAPACITY litre;(F/R/T)	195.98/438.97/634.95
	DIMENSIONS in;(W*H*D)	32 7/8* 68 1/2* 34
	WEIGHT kg	125
	HANDLE TYPE	VISTA-Handle
	REVERSIBLE DOOR	YES
	DOOR FINISH	STAINLESS
	REFRIGERANT/gr	R134a 120±3
FREEZER	ICE BANK	YES
	SHELF	WIRE
	BASKET DOOR	PLASTIC(1)
	LAMP	YES(1)/40w blue
REFRIGERATOR	TRAY MEAT	YES
	SHELF	4FIX
	MAGIC CRISPER	NO
	LAMP	YES(2)/40w blue
	GUIDE BOTTLE	NO
	DOOR COOOLING	NO
	TRAY VEGETABLE	YES (AUTO-CLOSE)
	BASKET DOOR	2 1/3 + 2 2/3 + 1full

2. PARTS IDENTIFICATIONS

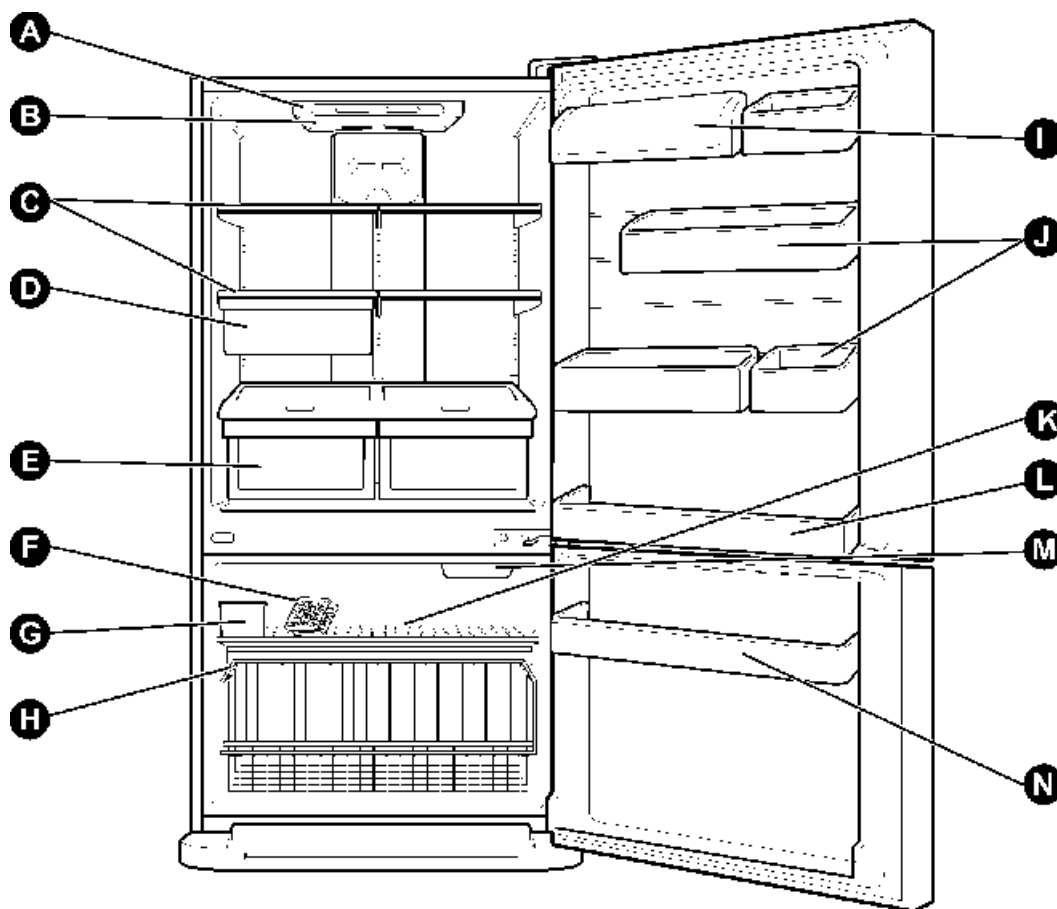

Use this section to become more familiar with the parts and features.

NOTE: This guide covers several different models. The refrigerator you have purchased may have some or all of the items listed below. The locations of the features shown below may not match your model.

A Digital Sensor Control

B Refrigerator Light

C Shelves

D Snack Pan

E Optibin Crisper
Keeps fruits and vegetable fresh and crisp

F Ice Trays*

G Ice Bin

H Wire Durabase

I Dairy Bin

J Design-A-Door

K Wire Freezer Shelf

L Refrigerator Door Rack

M Freezer Light

N Freezer Door Rack


*on some models

3. DISASSEMBLY

3-1 DOOR

Refrigerator Door

- Remove the top hinge cover (1).
- Remove the 3 screws and lift off the top hinge (2).
- Lift the refrigerator door (3) slightly and remove it.
- Pry off the cover (4) using a slotted screwdriver and attach it on the right.
- Loosen the screw (5), remove the stoppers (6) and attach them on the left (on the opposite side).
- Loosen the pin (7) and remove it.
- Lift off the washer (8).
- Pry off the cover (9) using a slotted screwdriver and attach it on the right.

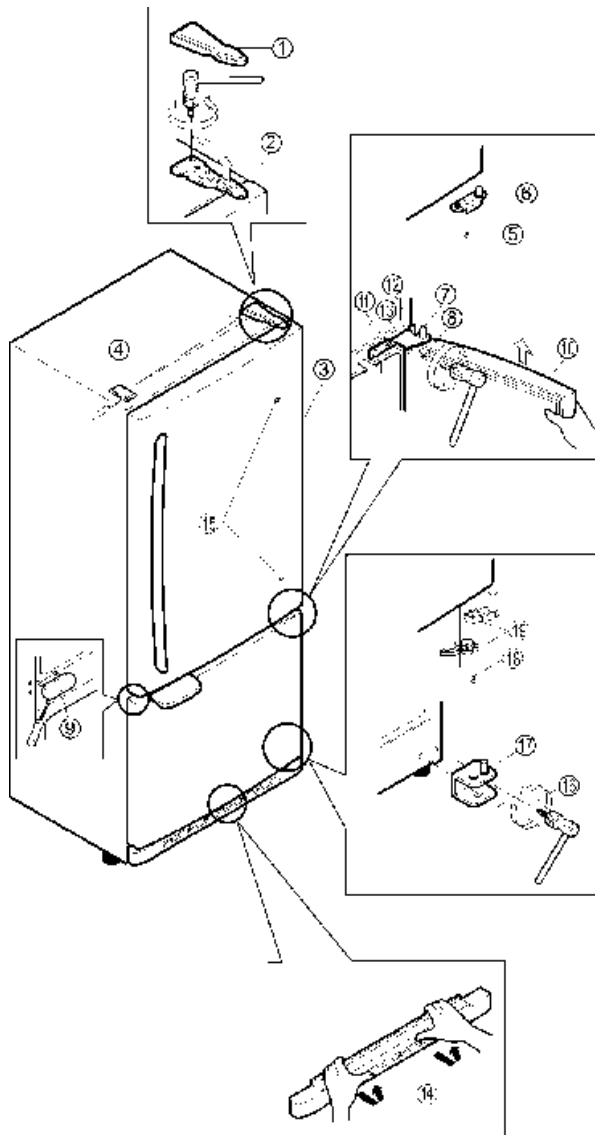


Freezer Door

- Lift the door (10) slightly and remove it.
- Loosen the 2 screws (11), the 2 screws (12), and lift off the middle hinge (13).
- Take off the base grille (14).
- Remove the cap (15) and attach it on the right.
- Loosen the 2 screws (16), remove the bottom hinge (17), and attach on the left.
- Loosen the 2 screws (18) and attach the stopper (19) on the left side of the base.

3-2 DOOR SWITCH

1. To remove the door switch, pry it out with a slotted-type driver, as shown in (Figure 1).
2. Disconnect the lead wire from the switch.

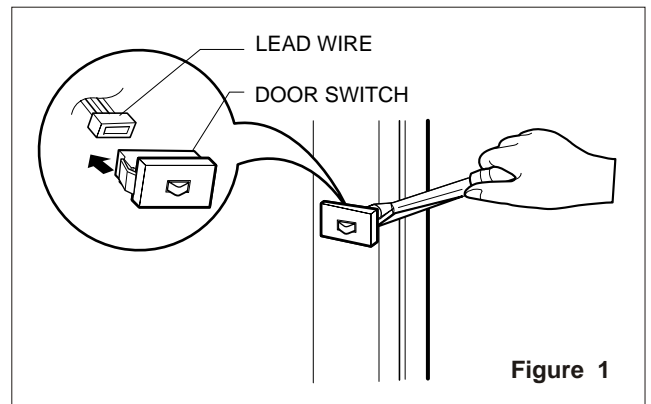

3-3 FAN AND FAN MOTOR

1. Remove the freezer shelf. (If your refrigerator has an icemaker, remove the icemaker first)
2. Remove the plastic guide for slides on left side by unscrewing phillips head screws.
3. Remove the grille by removing one screw and pulling the grille forward.
4. Remove the Fan Motor assembly by loosening 2 screws and disassembling the shroud.
5. Pull out the fan and separate the Fan Motor and Bracket.

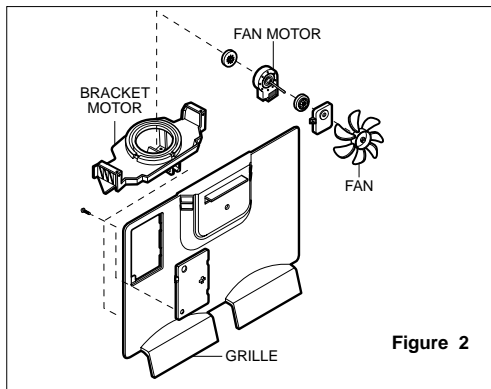


Figure 2

3-4 DEFROST CONTROL ASSEMBLY

Defrost Control assembly consists of Defrost Sensor and FUSE-M.

The Defrost Sensor works to defrost automatically. It is attached to the metal side of the Evaporator and senses its temperature. At 72°C, it turns the Defrost Heater off.

Fuse-M is a safety device for preventing over-heating of the Heater when defrosting.

1. Pull out the grille assembly. (Figure 3)
2. Separate the connector with the Defrost Control assembly and replace the Defrost Control assembly after cutting the Tie Wrap. (Figure 4)




Figure 3




Figure 3

3-5 LAMP

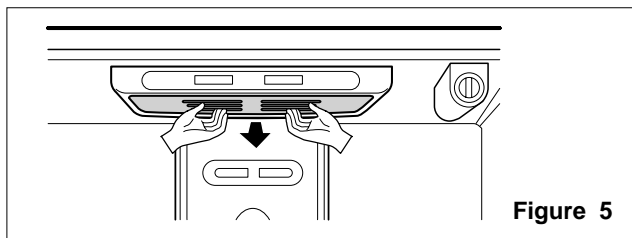


Figure 5

3-5-1 Refrigerator Compartment Lamp

1. Unplug the power cord from the outlet.
2. Remove refrigerator shelves.
3. Release the hooks on both ends of the lamp shield and pull the shield downward to remove it.
4. Turn the lamp counterclockwise.
5. Assemble in reverse order of disassembly. Replacement bulb must be the same specification as the original (Max. 40 W-2EA).

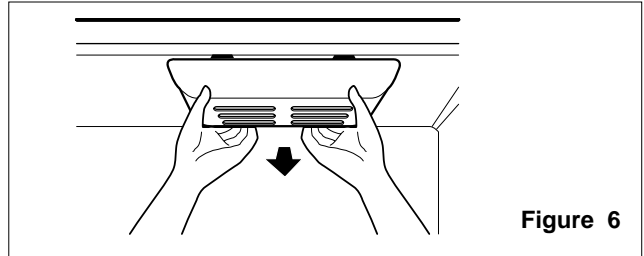


Figure 6

3-5-2 Freezer Compartment Lamp

1. Unplug refrigerator or disconnect power.
2. Reach behind light shield to remove bulb.
3. Replace bulb with a 40-watt appliance bulb.
4. Plug in refrigerator or reconnect power.

3-6 CONTROL BOX-REFRIGERATOR

1. First, remove all shelves in the refrigerator, then remove the Refrigerator control Box by loosening 2 screws.

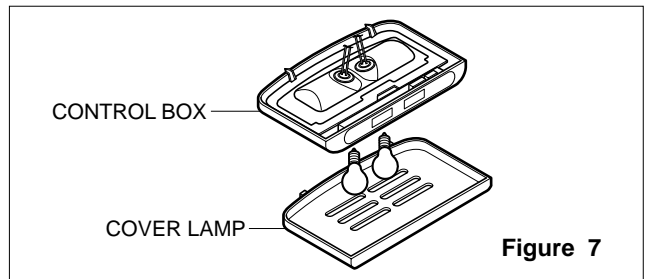


Figure 7

2. Remove the Refrigerator Control Box by pulling it downward.
3. Disconnect the lead wire on the right position and separate the lamp sockets.

3-7 MULTI DUCT

1. Remove an upper and lower Cap by using a flat screwdriver, and loosen 3 screws. (Figure 8)
2. Disconnect the lead wire on the bottom position.

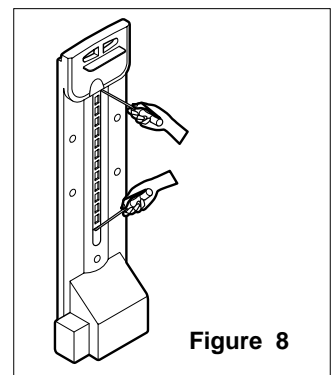


Figure 8

4. ADJUSTMENT

4-1 COMPRESSOR

4-1-1 Role

The compressor intakes low temperature and low pressure gas from the evaporator of the refrigerator and compresses this gas to high-temperature and high-pressure gas. In then delivers the condenser.

4-1-2 Composition

The compressor includes overload protection. The PTC started and OLP (overload protector) are attached to the outside of the compressor. Since the compressor os manufactured to tolerances of 1 micron and is hermetically sealed in a dust and moisture-free environment, use extreme caution when repairing it.

4-1-3 Note for Usage

- (1) Be careful not to allow over-voltage and over-current.
- (2) If compressor is dropped or handled carelessly, poor operation and noise may result.
- (3) Use proper electric components appropriate to the Particular Compressor in your product.
- (4) Keep Compressor dry.
If the Compressor gets wet (in the rain or a damp environment) and rust forms in the pin of the Hermetic Terminal, poor operation and contact may result.
- (5) When replacing the Compressor, be careful that dust, humidity, and soldering flux don't contaminate the inside of the compressor. Dust, humidity, and solder flux contaminate the cylinder and may cause noise, improper operation or even cause it to lock up.

4-2 PTC-STARTER

4-2-1 Composition of PTC-Starter


- (1) PTC (Positive Temperature Coefficient) is a no-contact semiconductor starting device which uses ceramic material consisting of $BaTiO_3$.
- (2) The higher the temperature is, the higher the resistance value. These features are used as a starting device for the Motor.

4-2-2 Role of PTC-Starter

- (1) The PTC is attached to the Sealed Compressor and is used for starting the Motor.
- (2) The compressor is a single-phase induction motor. During the starting operation, the PTC allows current flow to both the start winding and main winding.

4-2-3 PTC-Applied Circuit Diagram

Starting Method for the Motor

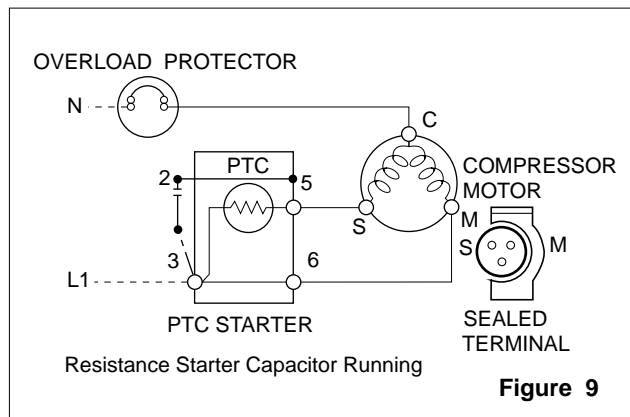

4-2-4 Motor Restarting and PTC Cooling

- (1) It requires approximately 5 minutes for the pressure to equalize before the compressor can restart.
- (2) The PTC device generates heat during operation. Therefore, it must be allowed to cool before the compressor can restart.

4-2-5 Relation of PTC-Starter and OLP

- (1) If the compressor attempts to restart before the PTC device is cooled, the PTC device will allow current to flow only to the main winding.
- (2) The OLP will open because of the over current condition. This same process will continue (3 to 5 times) when the compressor attempts to restart until the PTC device has cooled. The correct OLP must be properly attached to prevent damage to the compressor.
Parts may appear identical but could have different electrical ratings. Replace parts by part number and model number. Using an incorrect part could result in damage to the product, fire, injury, or possibly death.

4-2-6 Note for using the PTC-Starter

- (1) Be careful not to allow over-current.
- (2) Do not drop or handle carelessly.
- (3) Keep away from any liquid.
If liquid such as oil or water enters to the PTC, PTC materials may fail due to breakdown of their insulating capabilities.
- (4) If the exterior of the PTC is damaged, the resistance value may be altered. This can cause damage to the compressor and result in a no-start or hard-to-start condition.
- (5) Always use the PTC designed for the compressor and make sure it is properly attached to the compressor. Parts may appear physically identical but could have different electrical ratings. Replace parts by part number and model number. Using an incorrect part could result in damage to the product, fire, injury, or possibly death.

4-3 OLP (OVERLOAD PROTECTOR)

4-3-1 Definition of OLP


(1) OLP (OVERLOAD PROTECTOR) is attached to the Compressor and protects the Motor by opening the circuit to the Motor if the temperature rises and activating the bimetal spring in the OLP.

(2) When high current flows to the Compressor motor, the Bimetal works by heating the heater inside the OLP, and the OLP protects the Motor by cutting off the current flowing to the Compressor Motor.


4-3-2 Role of the OLP

(1) The OLP is attached to the Sealed Compressor used for the Refrigerator. It prevents the Motor Coil from being started in the Compressor.


(2) For normal operation of the OLP, do not turn the Adjust Screw of the OLP in any way.

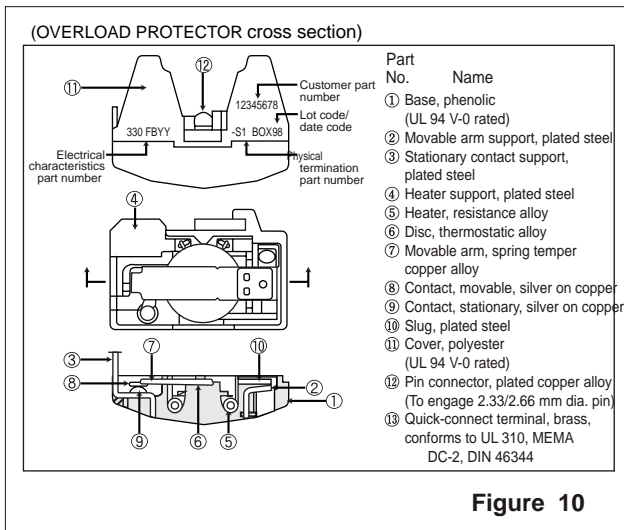

4-4 TO REMOVE THE COVER PTC

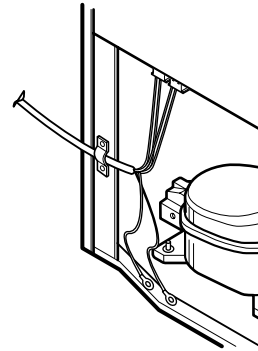

- (1) Remove the Cover Back M/C.
- (2) Disconnect two housing upper side of compressor connected in.
- (3) Loosen two screws on compressor base.

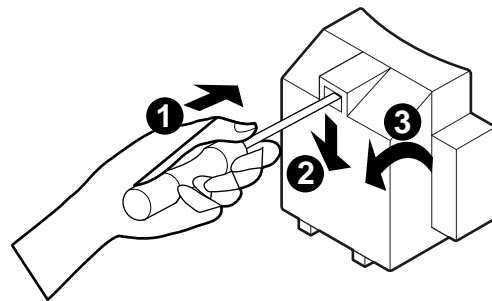


- (4) Use a L-shaped flap tool to pry off the cover.
- (5) Assembly in reverse order of disassembly.

5. CIRCUIT DIAGRAM




DIAGRAMA ELECTRICO - CIRCUIT DIAGRAM

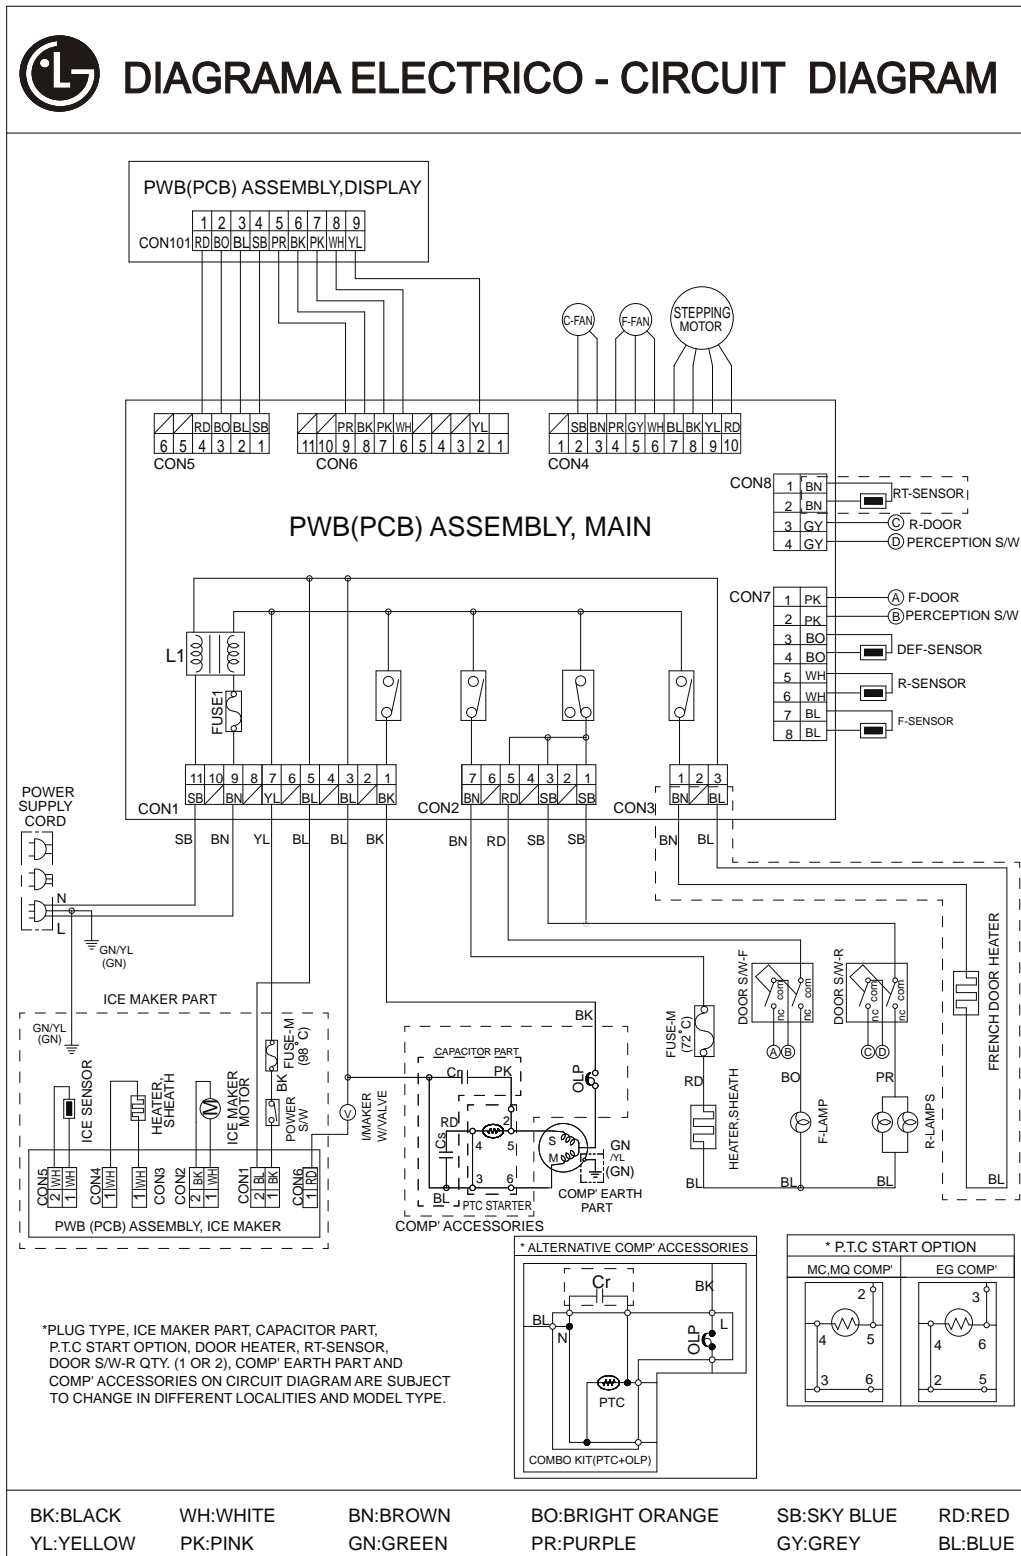

BK:BLACK	WH:WHITE	BN:BROWN	BO:BRIGHT ORANGE	SB:SKY BLUE	RD:RED
YL:YELLOW	PK:PINK	GN:GREEN	PR:PURPLE	GY:GREY	BL:BLUE

6. TROUBLESHOOTING

6-1 COMPRESSOR AND ELECTRIC COMPONENTS

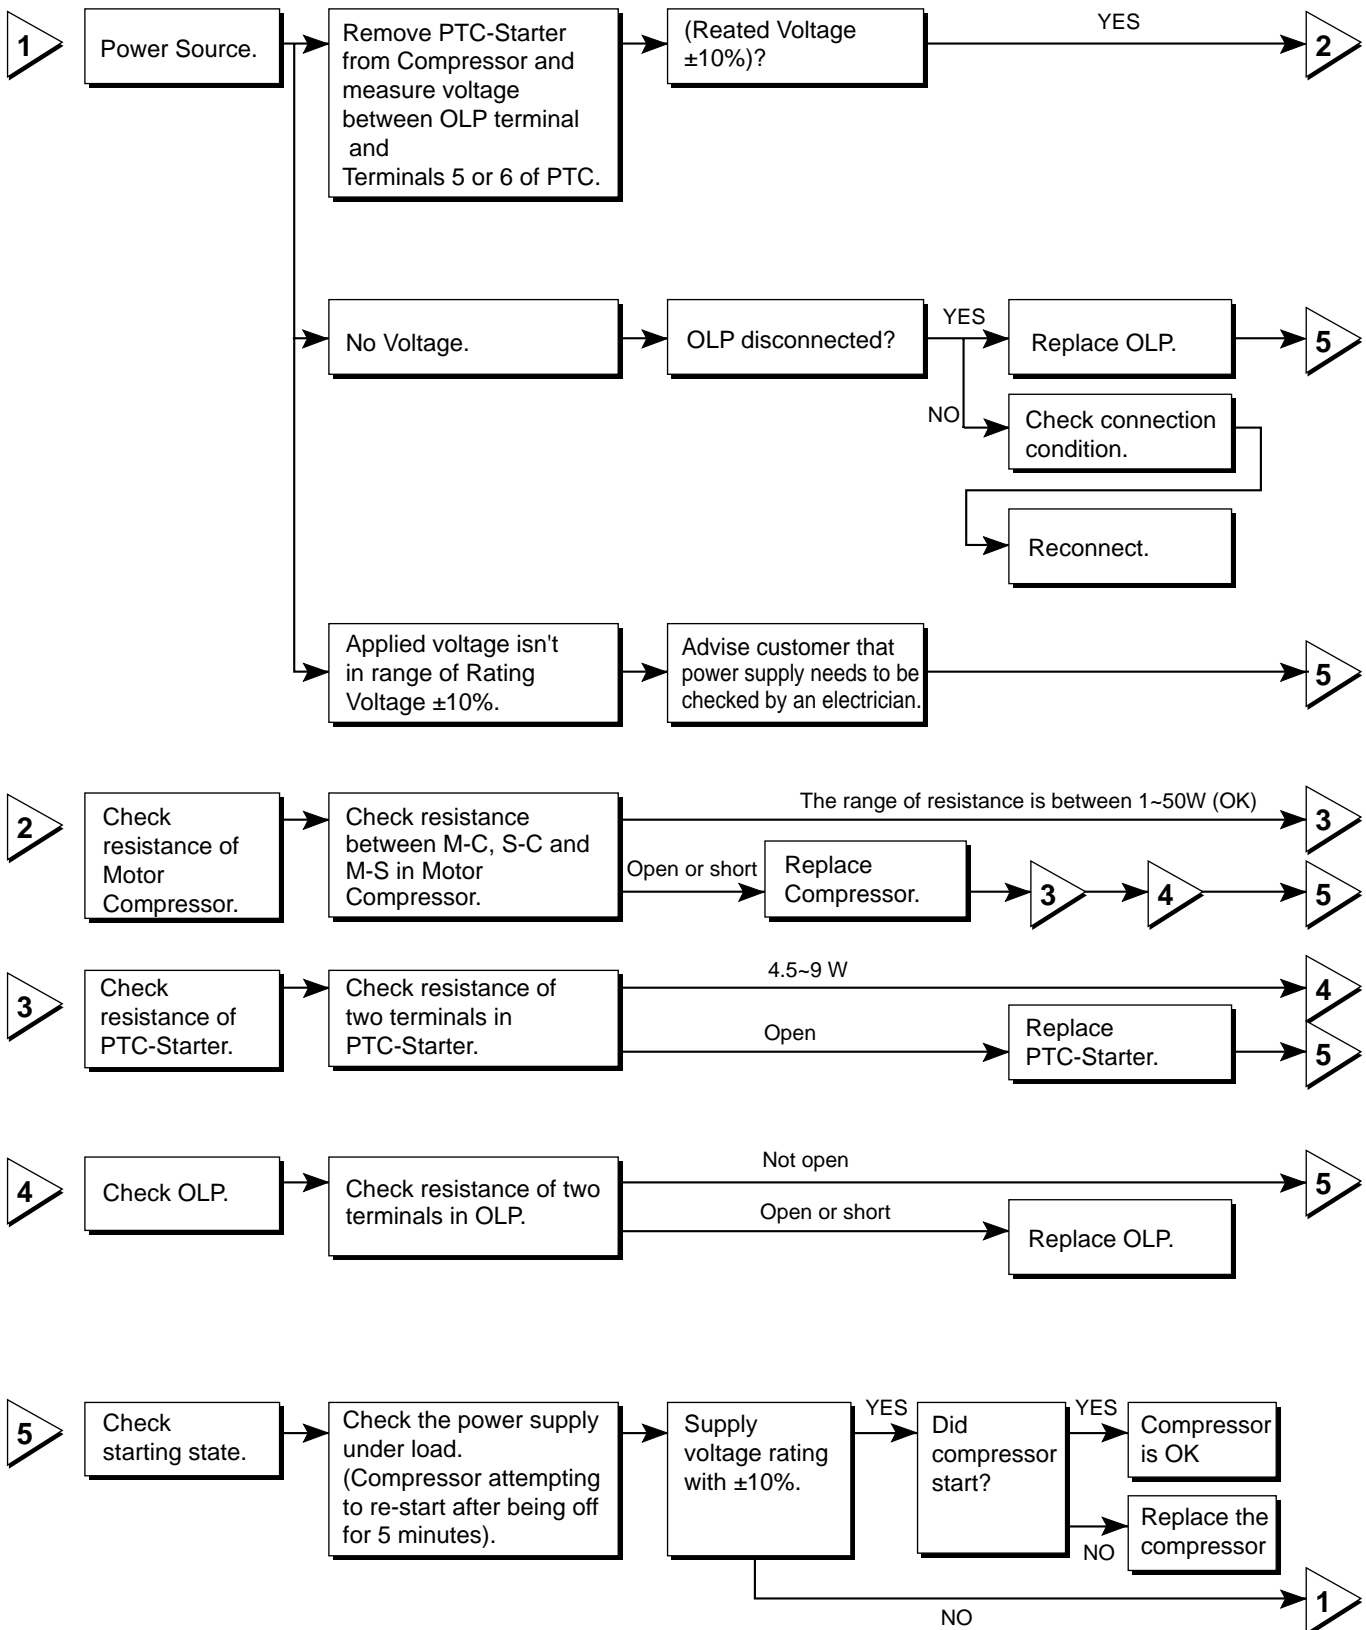

6-2 PTC AND OLP


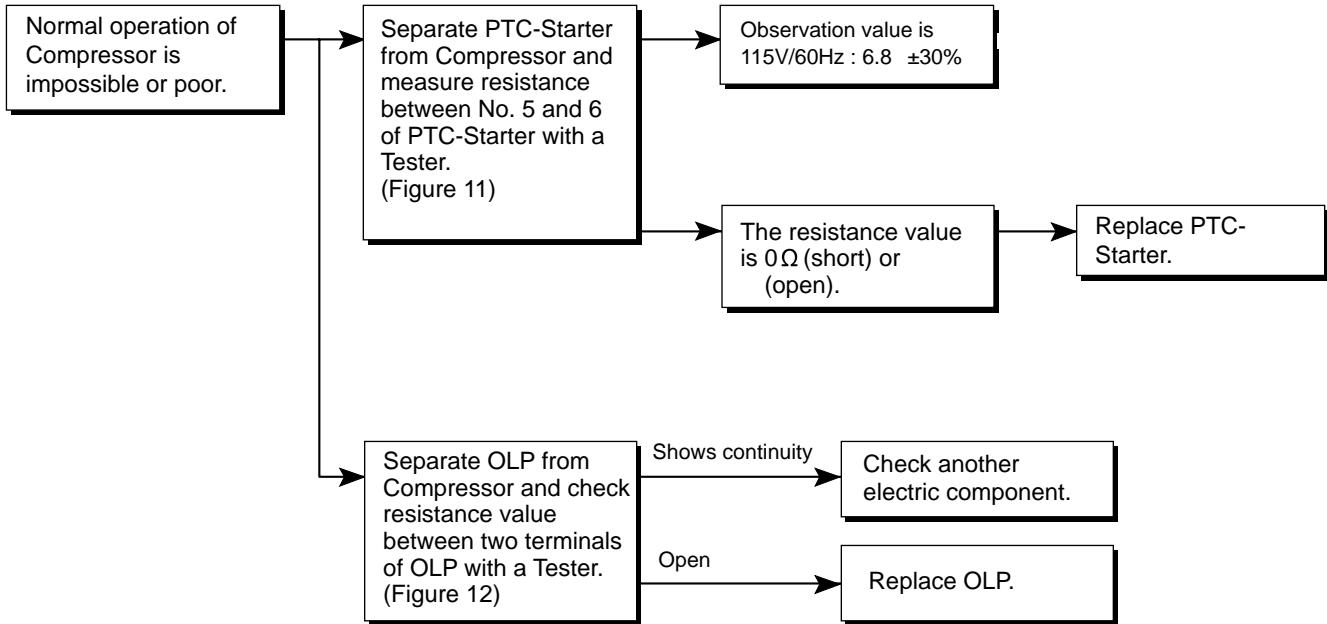


Figure 11








Figure 12

6-3 OTHER ELECTRICAL COMPONENTS

Not cooling at all

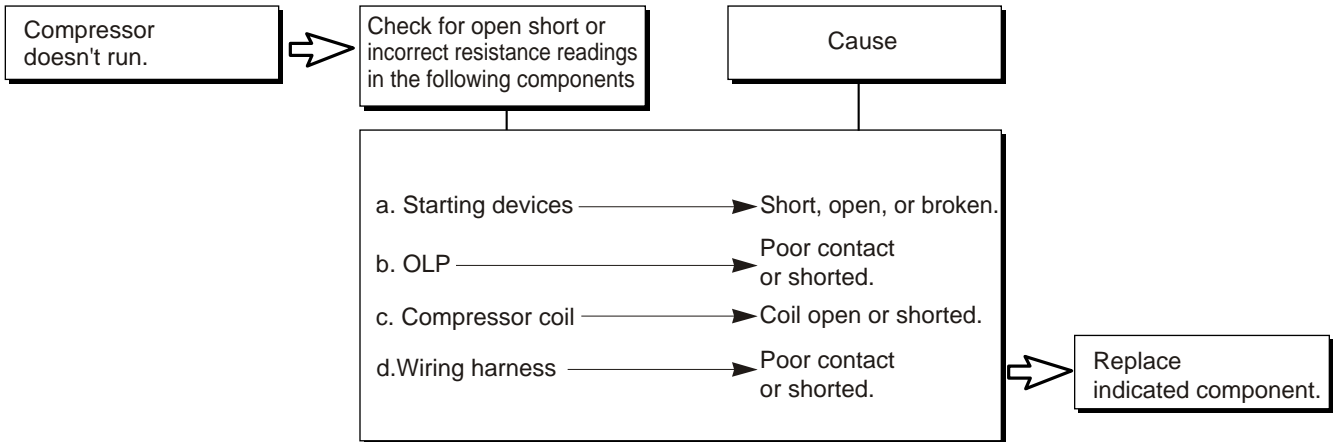


Poor cooling performance

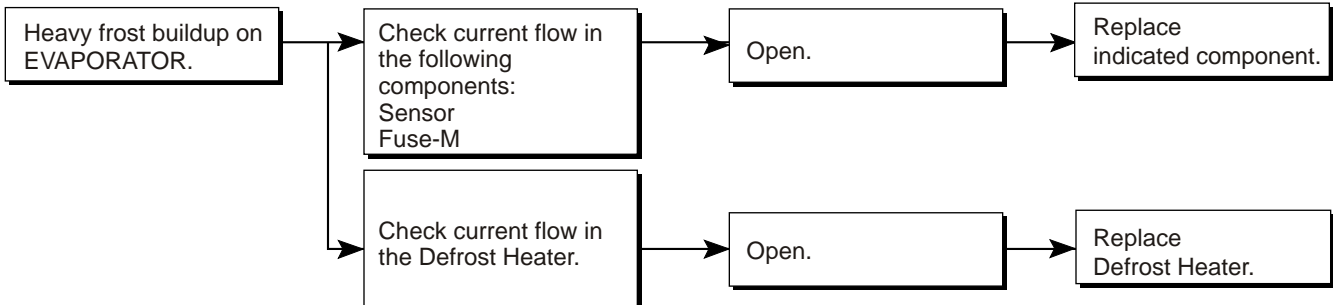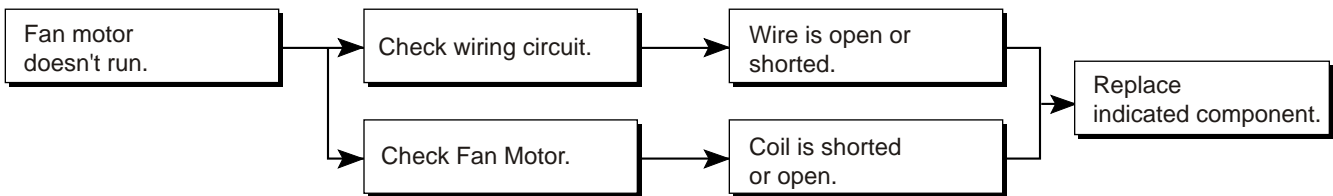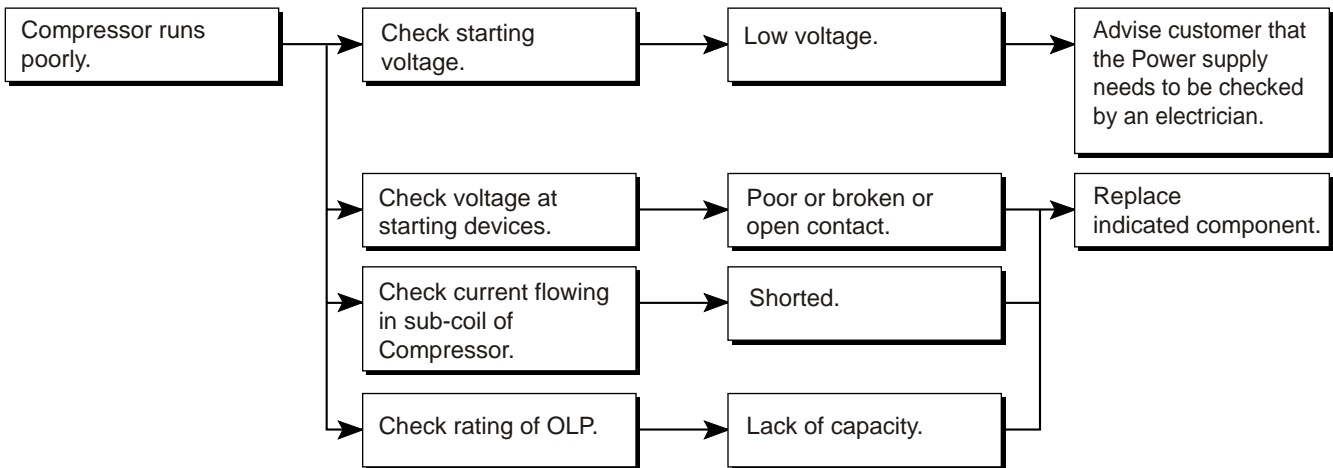

6-4 SERVICE DIAGNOSIS CHART

COMPLAINT	POINTS TO BE CHECKED	REMEDY
No Cooling.	<ul style="list-style-type: none"> • Is the power cord unplugged from the outlet? • Check if the power switch is set to OFF. • Check if the fuse of the power switch is shorted. • Measure the voltage of the power outlet. 	<ul style="list-style-type: none"> • Plug into the outlet. • Set the switch to ON. • Replace the fuse. • If the voltage is low, correct the wiring.
Cools poorly.	<ul style="list-style-type: none"> • Check if the unit is placed too close to the wall. • Check if the unit is placed too close to the stove, gas cooker, or in direct sunlight. • Is the ambient temperature too high or the room door closed? • Check if food put in the refrigerator is hot. • Did you open the door of the unit too often or check if the door is sealed properly? • Check if the Control is set to Warm position. 	<ul style="list-style-type: none"> • Place the unit about 4 inches (10 cm) from the wall. • Place the unit away from these heat sources. • Lower the ambient temperature. • Put in foods after they have cooled down. • Don't open the door too often and close it firmly. • Set the control to Recommended position.
Foods in the Refrigerator are frozen.	<ul style="list-style-type: none"> • Is food placed in the cooling air outlet? • Check if the control is set to colder position. • Is the ambient temperature below 41°F(5°C)? 	<ul style="list-style-type: none"> • Place foods in the high-temperature section. (front part) • Set the control to Recommended position. • Set the control to Warm position.
Condensation or ice forms inside the unit.	<ul style="list-style-type: none"> • Is liquid food sealed? • Check if food put in the refrigerator is hot. • Did you open the door of the unit too often or check if the door is sealed properly? 	<ul style="list-style-type: none"> • Seal liquid foods with wrap. • Put in foods after they have cooled down. • Don't open the door too often and close it firmly.
Condensation forms in the Exterior Case.	<ul style="list-style-type: none"> • Check if the ambient temperature and humidity of the surrounding air are high. • Is there a gap in the door gasket? 	<ul style="list-style-type: none"> • Wipe moisture with a dry cloth. It will disappear in low temperature and humidity. • Fill up the gap.
There is abnormal noise.	<ul style="list-style-type: none"> • Is the unit positioned in a firm and even place? • Are any unnecessary objects placed in the back side of the unit? • Check if the Tray Drip is not firmly fixed. • Check if the cover of the compressor enclosure in the front lower side is taken out. 	<ul style="list-style-type: none"> • Adjust the Leveling Screw, and position the refrigerator in a firm place. • Remove the objects. • Fix the Tray Drip firmly in the original position. • Place the cover in its original position.
Door does not close well.	<ul style="list-style-type: none"> • Check if the door gasket is dirty with an item like juice. • Is the refrigerator level? • Is there too much food in the refrigerator? 	<ul style="list-style-type: none"> • Clean the door gasket. • Position in the firm place and level the Leveling Screw. • Make sure food stored in shelves does not prevent the door from closing.
Ice and foods smell unpleasant.	<ul style="list-style-type: none"> • Check if the inside of the unit is dirty. • Are foods with a strong odor unwrapped? • The unit smells of plastic. 	<ul style="list-style-type: none"> • Clean the inside of the unit. • Wrap foods that have a strong odor. • New products smell of plastic, but this will go away after 1-2 weeks.

Other possible problems:

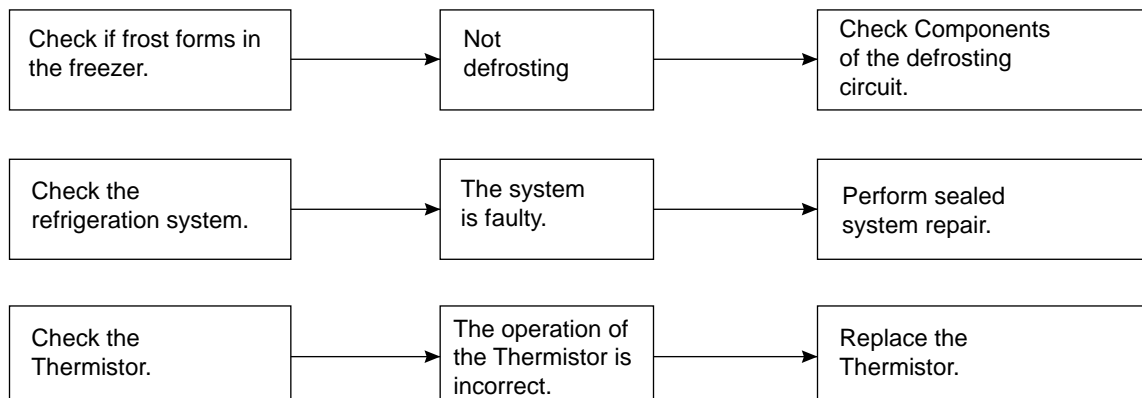


6-5 REFRIGERATION CYCLE

Troubleshooting Chart

CAUSE		STATE OF THE UNIT	STATE OF THE EVAPORATOR	TEMPERATURE OF THE COMPRESSOR	REMARKS
LEAKAGE	PARTIAL LEAKAGE	Freezer compartment and Refrigerator don't cool normally.	Low flowing sound of Refrigerant is heard and frost forms in inlet only.	A little higher than ambient temperature.	<ul style="list-style-type: none"> Refrigerant level is low due to a leak. Normal cooling is possible by restoring the normal amount of refrigerant and repairing the leak.
	COMPLETE LEAKAGE	Freezer compartment and Refrigerator don't cool normally.	Flowing sound of refrigerant is not heard and frost isn't formed.	Equal to ambient temperature.	<ul style="list-style-type: none"> No discharging of Refrigerant. Normal cooling is possible by restoring the normal amount of refrigerant and repairing the leak.
CLOGGED BY DUST	PARTIAL CLOG	Freezer compartment and Refrigerator don't cool normally.	Flowing sound of refrigerant is heard and frost forms in inlet only.	A little higher than ambient temperature.	<ul style="list-style-type: none"> Normal discharging of the refrigerant. The capillary tube is faulty.
	WHOLE CLOG	Freezer compartment and Refrigerator don't cool.	Flowing sound of refrigerant is not heard and frost isn't formed.	Equal to ambient temperature.	<ul style="list-style-type: none"> Normal discharging of the Refrigerant.
MOISTURE CLOG		Cooling operation stops periodically.	Flowing sound of refrigerant is not heard and frost melts.	Lower than ambient temperature.	<ul style="list-style-type: none"> Cooling operation restarts when heating the inlet of the capillary tube.
DEFECTIVE COMPRESSION	COMPRESSION	Freezer and Refrigerator don't cool.	Low flowing sound of refrigerant is heard and frost forms in inlet only.	A little higher ambient temperature.	<ul style="list-style-type: none"> Low pressure at high side of compressor due to low refrigerant level.
	NO COMPRESSION	No compressing operation.	Flowing sound of refrigerant is not heard and there is no frost.	Equal to ambient temperature.	<ul style="list-style-type: none"> No pressure in the high pressure part of the compressor.

Leakage Detection

Observe the discharging point of the refrigerant, which may be in the oil discharging part of the compressor and in a hole in the evaporator.

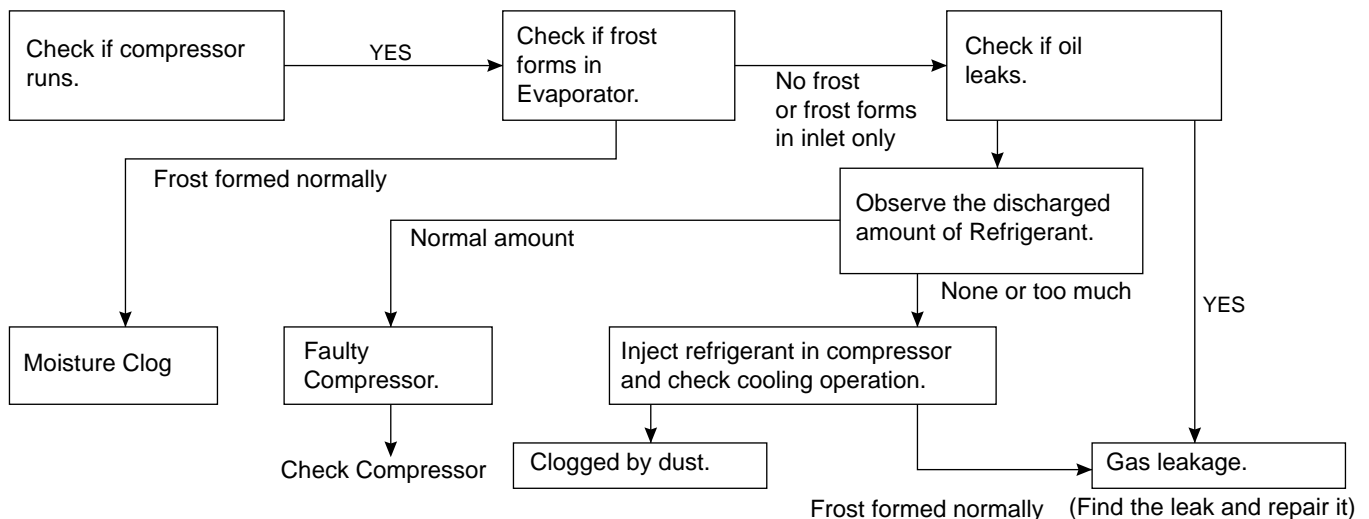


General Control of Refrigerating Cycle

NO.	ITEMS	UNIT	STANDARDS	PURPOSES	REMARKS	
1	Pipe and piping system opening time	Min.	Pipe: within 1 hour. Comp: within 10 minutes. Drier: within 20 minutes.	To protect moisture penetration.	The opening time should be reduced to a half of the standards during rain and rainy seasons (the penetration of water into the pipe is dangerous).	
2	Welding	Nitrogen pressure	Weld under Nitrogen atmosphere. (N ₂ pressure: 0.1~0.2 kg/cm ²)	To protect oxide scale formation.	- Refer to repair note in each part. - R-134a refrigerant is more susceptible to leaks than R-12 and requires more care during welding. - Do not apply force to pipes before and after welding to protect pipe from cracking.	
3	N ₂ sealed parts	Confirm N ₂ leak	Confirm the sound of pressure relief when removing the rubber cap. Sound: usable No sound: not usable	To protect moisture penetration.	- In case of evaporator parts, if it doesn't make sound when removing rubber cap, blow dry air or N ₂ gas for more than 1 min. and then use the parts.	
4	Refrigeration Cycle	Evacuation time	Min.	More than 40 minutes	To remove moisture.	
		Vacuum degree	Torr	Below 0.03 (ref)		Note: Only applicable to the model equipped with reverse flow protect plate.
		Vacuum	EA	High and low pressure sides are evacuated at the same time for models above 200 l.		Vacuum efficiency can be improved by operating compressor during evacuation.
		Vacuum piping	EA	Use R-134a manifold exclusively.	To protect mixing of mineral and ester oils.	The rubber pipes for R-12 refrigerant will be melted when they are used for R-134a refrigerant (causes of leak.)
		Pipe coupler	EA	Use R-134a manifold exclusively.	To protect R-12 refrigerant mixing.	
		Outlet (Socket)		R-134a manifold exclusively.	To protect R-12 refrigerant mixing.	
		Plug		R-134a manifold exclusively.	To protect R-12 refrigerant mixing.	
5	Refrigerant weighing	EA	Use R-134a exclusively. Weighing allowance: 5g Note: Winter: -5g Summer: +5g	Do not mix with R-12 refrigerant.	- Do not weigh the refrigerant at too hot or too cold an area. (77°F [25°C] is adequate.) - Make Copper charging canister (Device filling refrigerant) Socket: 2SV Plug: 2PV R-134a Note: Do not burn O-ring (bushing) during welding.	
6	Drier replacement		- Use R-134a exclusively for R-134a refrigerator. - Replace drier whenever repairing refrigerator cycle piping.	To remove the moisture from pipe inside.		
7	Leak check		- Do not use soapy water for check. It may be sucked into the pipe by a vacuum.	Defect in refrigerant leak area.	- Check for an oil leak at the refrigerant leak area. Use an electronic leak detector if an oil leak is not found. - The electronic leak detector is very sensitive to halogen gas in the air. It also can detect R-141b in urethane. Practice many times before using this type of detector to avoid false readings.	


7. OPERATION PRINCIPLE AND REPAIR METHOD OF ICEMAKER

7-1 OPERATION PRINCIPLE

7-1-1 Operation Principle of Icemaker

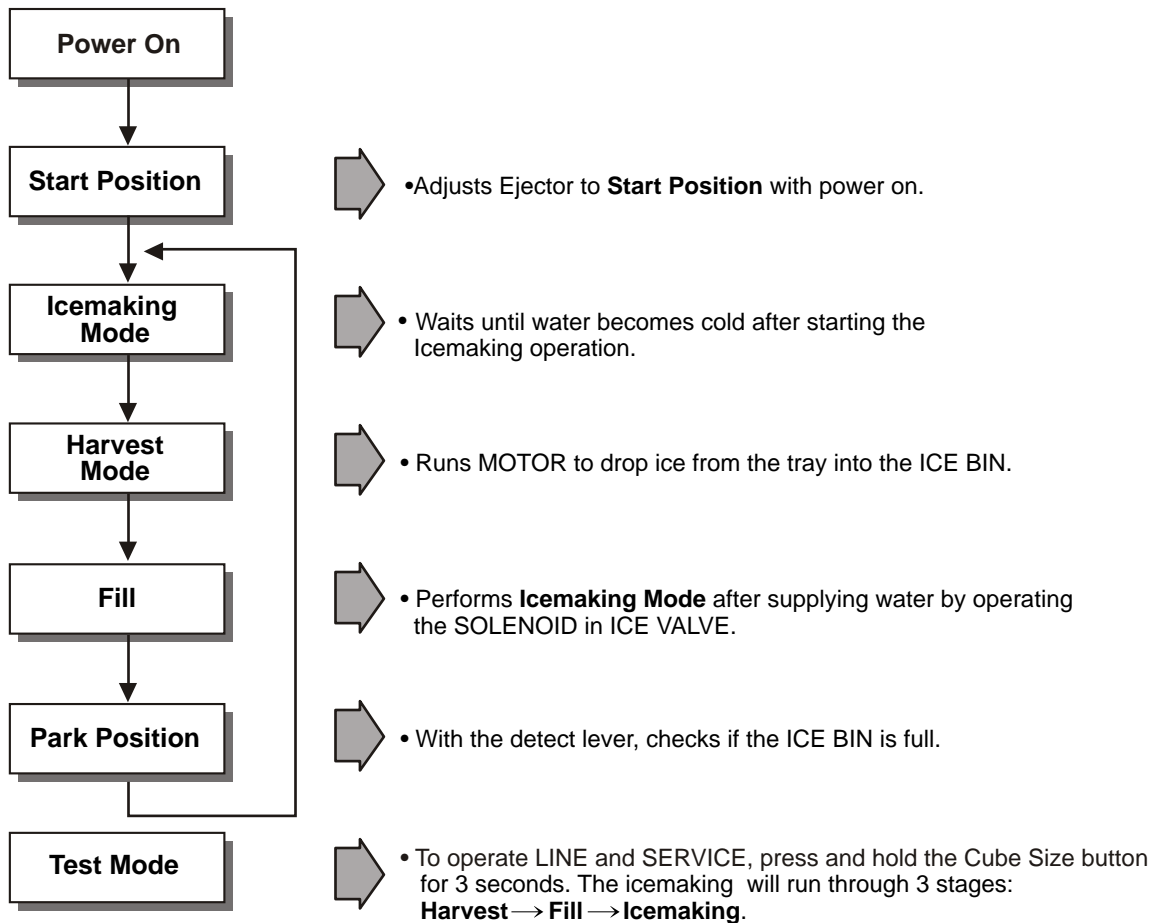

1. Turning the Icemaker stop switch off (O) stops the icemaking function.
2. Setting the Icemaker switch to OFF and then turning it back on will reset the icemaker control.

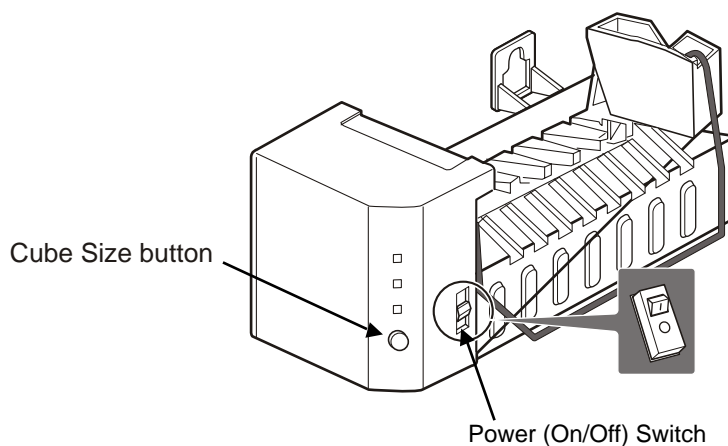

7-2 ICE MAKER FUNCTIONS

7-2-1 Ice Making Mode

1. Icemaking refers to the freezing of supplied water in the ice trays. Complete freezing is assured by measuring the temperature of the Tray with icemaking SENSOR.
2. Icemaking starts after completion of the water fill operation.
3. The icemaking function is completed when the sensor reaches -7°C, 60 to 240 minutes after starting.

NOTE : After icemaker power is ON, the icemaker heater will be on for test for 9 sec.

7-2-2 Harvest Mode




1. Harvest (Ice removing) refers to the operation of dropping ices into the ice bin from the tray when icemaking has completed.
2. Harvest mode:
 - (1) The Heater is ON for 30 seconds, then the motor starts.
 - (2) Harvest mode is completed if it reaches start position again while Heater & Motor are on at the same time.
 - A. ice bin is full : The EJECTOR stops (heater off).
 - B. ice bin is not full : The EJECTOR rotates twice to open for ice.

NOTE : If the EJECTOR does not rotate once within 5 minutes in status (2), separate heater control mode starts operating to prevent the EJECTOR from being constrained. (It is recommended that the user open for ice to return to normal mode.)

7-2-3 Fill/Park Position

1. Once a normal harvest mode has been completed, the water solenoid will be activated.
2. The amount of water is adjusted by pressing the fill key repeatedly. This changes the time allowed for fill as illustrated in the table below.






Water supply amount table

STAGE	TIME TO SUPPLY	INDICATIONS	REMARKS
1	6 sec.		The water amount will vary depending on the water control switch setting, as well as the water pressure of the connected water line.
2	7 sec.		
3	8 sec.		

7-2-5 Function TEST



1. This is a compulsory operation for test, service, cleaning, etc. It is operated by pressing and holding the Cube Size button for 3 seconds.
2. The test works only in the Icemaking Mode. It cannot be entered from the Harvest or Fill mode. (If there is an ERROR, it can only be checked in the TEST mode.)
3. **Caution!** If the test is performed before water in the icemaker is frozen, the ejector will pass through the water. When the fill mode begins (Stage 4), unless the water supply has been shut off, added water will overflow into the ice bin. If the control Doesn't operate normally in the TEST mode, check and repair as needed.
4. After water is supplied, the normal CYCLE is followed: **icemaking** ⇌ **Harvest** ⇌ **Fill** ⇌ **Park Position**.
5. Five seconds after Stage 5 is completed, the icemaker returns to MICOM control. The time needed to supply water resets to the pre- test setting.

Diagnosis TABLE

STAGE	ITEMS	INDICATOR *	REMARKS
1	HEATER		Five seconds after heater starts, heater will go off if temperature recorded by sensor is 10°C (50°F) or lever is in up position.
2	MOTOR		Five seconds after heater starts, you can confirm that motor is moving.
3	HALL IC (TRAY)		You can confirm Hall IC detection of position.
4	SOLENOID VALVE		Two seconds after detection of initial position, you can confirm that valve is on.
5	HALL IC (LEVER)		You can check when the Hall IC is sensing a full ice condition. (If there is a water fill error, the fifth LED is not on.)
6	Reset	Return to Status prior to TEST MODE	Five seconds after fifth stage is completed, the icemaker resets to initial status.

7-3 DEFECT DIAGNOSIS FUNCTION

7-3-1 ERROR CODES shown on Ice Maker water supply control panel

NO	DIVISION	INDICATOR	PROBLEM	REMARKS
1	Normal	Note fill times (see previous page)	None	Display switch operates properly
2	Icemaking Sensor malfunction		Open or shorted wire or sensor	Make sure that the wire on each sensor is connected.
3	Icemaker Kit malfunction		Ejector blades have not reached the park position after 18 minutes from start of harvest mode	Check HALL IC/MOTOR/ HEATER/RELAY

* ERROR indicators in table can be checked only in TEST mode.

8. DESCRIPTION OF FUNCTION & CIRCUIT OF MICOM

8-1 FUNCTION

8-1-1 Function

1. When the appliance is plugged in, it is set to "4" for Refrigerator and "4" for freezer.
You can adjust the Refrigerator and the Freezer control temperature by pressing the ADJUST button.
2. When the power is initially applied or restored after a power failure, it is automatically set to "4" & "4".



8-1-2 Control of freezer fan motor

1. Freezer fan motor has high and standard RPMs.
2. High RPM is used when electricity is first on, for ICE PLUS, and when refrigerator is overloaded.
But standard RPM is used for general purposes.
3. To improve cooling speed and load corresponding speed, the RPM of freezer fan motor shall change from normal speed to high speed.
4. High speed (2600RPM): Initial power on or load corresponding operation, ICE PLUS.
Normal speed (2300RPM): general working conditions.
5. Fan motor stops when refrigerator door opens.
6. Fan motor stops when freezer door opens. (only if COMP is OFF)

8-1-3 ICE PLUS


1. The purpose of this function is to intensify the cooling speed of freezer and to increase the amount of ice.
2. Whenever selection switch is pressed, selection/release, the LED will turn ON or OFF.
3. If there is a power cut and the refrigerator is power on again, ICE PLUS function will be canceled.
4. To activate this function you need to press the ICE PLUS key and the LED will turn ON. This function will remain activated for 24 hrs. The first three hours the compressor and ICE PLUS will be ON. The next 21 hours the freezer will be controlled at the lowest temperature. After 24 hours or if the ICE PLUS key is pressed again, the freezer will return to its previous temperature.
5. For the first three hours notice the following cases:
 - (1) Compressor and freezer fan(HIGH RPM) continuously operate for three hours.
 - (2) If defrost starts during ICE PLUS, ICE PLUS operates for the rest of time after defrost is completed, when ICE PLUS operation time is less than 90 minutes.
If ICE PLUS operates for more than 90 minutes, the ICE PLUS will operate for two hours after defrost is completed.
 - (3) If ICE PLUS is pressed during defrost, ICE PLUS is on but this function will start seven minutes after defrost is completed and it shall operate for three hours.
 - (4) If ICE PLUS is selected within seven minutes after compressor has stopped, the compressor (compressor delays seven minutes) shall start after the balance of the delay time.
 - (5) The fan motor in the freezer compartment rotates at high speed during ICE PLUS.
6. For the rest of 21 hours, the freezer will be controlled at the lowest temperature.

8-1-4. REFRIGERATOR LAMP AUTO OFF

1. To protect the risk of lamp heat, when Refrigerator door opens for 7 min., refrigerator lamp is auto off.

8-1-5 Alarm for Open Door

1. This feature sounds a buzzer when the freezer or refrigerator door is not closed within 1 minute after it is opened.
2. One minute after the door is opened, the buzzer sounds three times each for 1/2 seconds. These tones repeat every 30 seconds.
3. The alarm is cancelled when the freezer or the refrigerator is closed while the buzzer sounds.

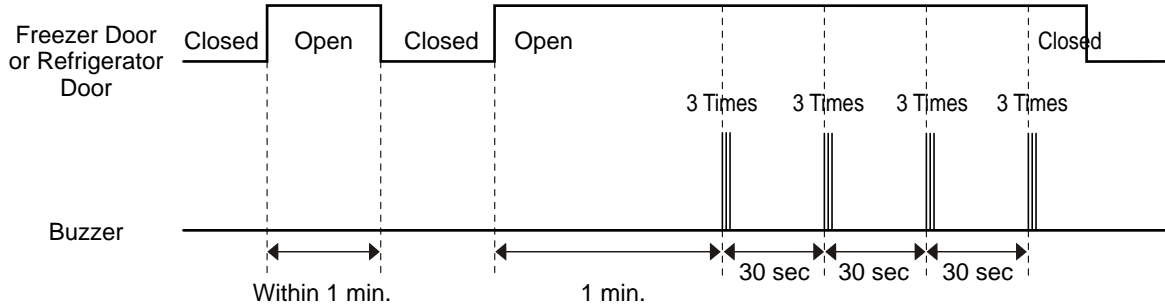

8-1-6 Buzzer Sound

When the button on the front Display is pushed, a Ding~ Dong~ sound is produced.

8-1-7 Defrosting (removing frost)

1. Defrosting starts each time the accumulated COMPRESSOR running time is between 7:30 and 40 hours. This time is determined by how often and how long the doors are opened.
2. For initial power on or for restoring power, defrosting starts when the compressor running time reaches 4 hours.
3. Defrosting stops if the sensor temperature reaches 46.4°F(8°C) or more. If the sensor doesn't reach 46.4°F(8°C) in 1 hours, the defrost mode is malfunctioning.
4. Defrosting won't function if its sensor is defective (wires are cut or short circuited)


8-1-8 Electrical Parts Are Turned On Sequentially

Electrical parts such as COMP, defrosting heater, freezer FAN, etc. are turned on in the following order to prevent noise and parts damage. Several parts are started at the same time at initial power on and are turned off together when TEST is completed.

OPERATING		ORDERS						
Initial power on	Temperature of Defrosting Sensor is 45°C or more (when unit is newly purchased or when moved)	POWER ON	In ½ second	COMP ON	In ½ second	Freezer FAN ON	In ½ second	Cooling FAN ON
	Temperature of defrosting sensor is lower than 45°C (when power cuts, SERVICE)	POWER ON	In ½ second	COMP ON	In ½ second	Freezer FAN ON	In ½ second	Cooling FAN ON
Reset to normal operation from TEST MODE		Total Load OFF	In 7 minute	COMP ON	In ½ second	Freezer FAN ON	In ½ second	Cooling FAN ON

8-1-9 Defect Diagnosis Function

1. Automatic diagnosis makes servicing the refrigerator easy.
2. When a defect occurs, the buttons will not operate; but the tones, such as ding, will sound.
3. When the defect CODE removes the sign, it returns to normal operation (RESET).
4. The defect CODE shows on the Refrigerator and Freezer Display.

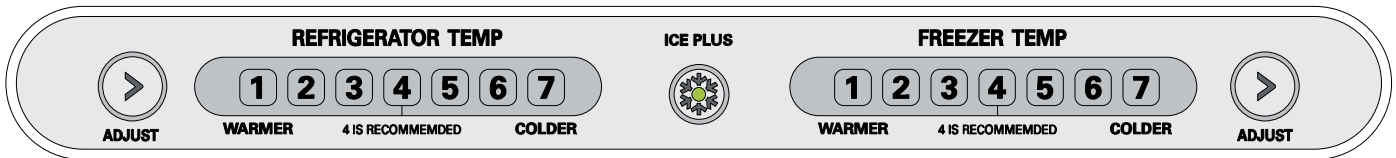

ERROR CODE on display panel

● LED OFF LED ON ○

NO	ITEM	ERROR CODE							CONTENTS	REMARKS	
1	Failure of freezer sensor	All off	●	○	○	○	○	○	Cut or short circuit wire	Inspect Connecting wires on each sensor	
2	Failure of Refrigerator sensor	All off	○	●	○	○	○	○	Cut or short circuit wire		
3	Failure of defrost sensor	All off	○	○	●	○	○	○	Cut or short circuit wire		
4	Poor of defrost	All off	●	●	●	●	○	○	○	1 hours later after starting defrost, If sensor doesn't be over 46°F (8°C)	Snapping of defrost heater or Temperature fuse, pull-out of Connector (indicated minimum 1 Hours after failure occurs)
5	Failure of BLDC fan motor at freezing compartment	All off	●	●	●	●	●	○	○	If there is no fan motor signal for more than 115sec in operation	Poor motor, hocking to wires of fan, contact of structures to fan, snapping or short of lead

8-1-10 TEST Mode

1. The Test mode allows checking the PCB and the function of the product as well as finding out the defective part in case of an error.
2. The test mode is operated by pressing two buttons at Display panel.
3. While in the test mode, the function control button is not recognized, but the recognition tone (beep~) sounds.
4. After exiting the test mode, be sure to reset by unplugging and then plugging in the appliance.
5. If an error, such as a sensor failure, is detected while in the test mode, the test mode is cleared and the error code is displayed.
6. While an error code is displayed, the test mode will not be activated.

MODE	MANIPULATION	CONTENTS	REMARKS
TEST1	Push ICEPLUS key and ADJUST key of Freezer temperature at the same time over 3 seconds. Or press TEST S/W one time in the Main PCB board.	1.-Continuous operation of the COMPRESSOR 2.Continuous operation of the freezer fan 3.Stepping DAMPER OPEN 4.Defrosting Heater OFF 5.Every DISPLAY LED ON	Reset after 5 minutes
TEST2	Push ICEPLUS key and ADJUST key of Freezer temperature at the same time over 3 seconds being in TEST MODE1. Or press TEST S/W one time being in TEST MODE 1.	1.COMP OFF 2.Freezer FAN OFF 3.Stepping DAMPER CLOSE 4.Defrosting Heater ON 5.DISPLAY LED 1,3,5,7 ON	Reset if the temperature of the defrosting sensor is 46°F (8°C) or more
Reset	Push ICEPLUS key and ADJUST key of Freezer temperature at the same time over 3 seconds being in TEST MODE2. Or press TEST S/W one time being in TEST MODE 2.	Reset to the previously setting before TEST MODE	The Compressor will start after a 7-minute Delay

NOTE : LED CHECK MODE: When the refrigerator temperature control and the freezer temperature control button at the same time are hold for 1 second or longer, every LED on the display turns on at the same time. when the button are released, the previous mode is restored.

* Freezer Fan RPM Variable Check:

In case the freezer fan is in operation when the ADJUST key in Refrigerator and Freezer Temp. Control are pressed for more than one second at the same time freezer fan RPM changes. (for example if high speed, to normal speed or if normal speed, to high speed for 30 seconds)


After 30 seconds, it turns to its original RPM.

* Demonstration MODE:

1. When the ICE PLUS key and ADJUST key of refrigerator temperature control are pressed for more than 3 seconds at the same time temperature's it converts to demonstration mode.
2. In this status, each LED is rotated with 1 second interval.
3. In this status, all Loads are off (Compressor / Fan / Damper / Heater)
(Even is Demonstration Mode, the refrigerator Lamp automatic off function works normally and can be demonstrated)
4. It reset if you do again as clause.

8-2 PCB FUNCTION

8-2-1 Power Circuit

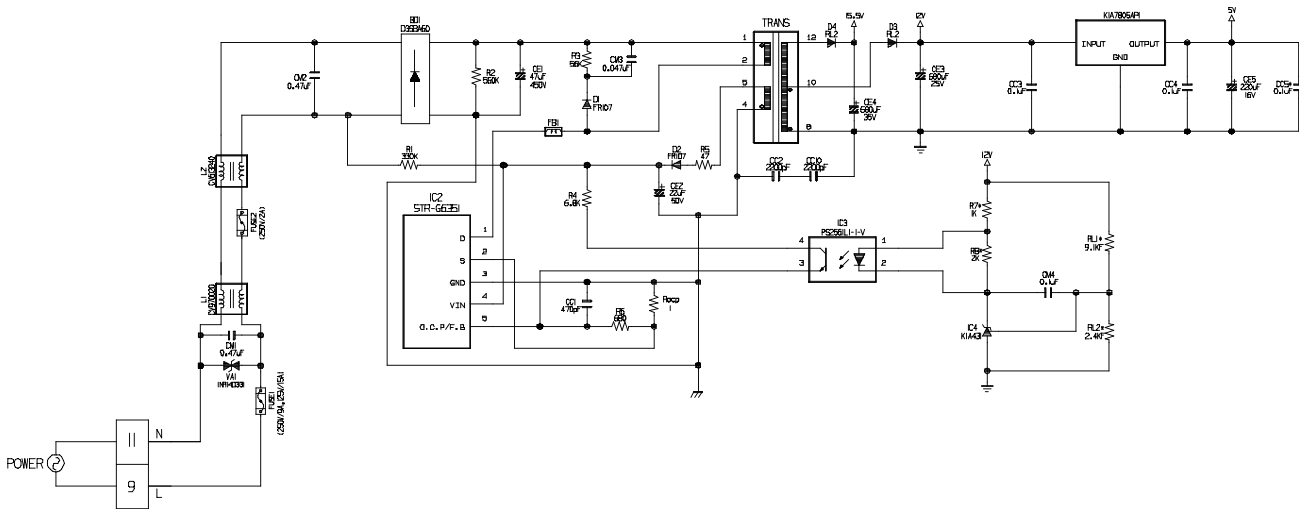


The secondary part of the TRANSFORMER is composed of the power supply for the display, the BLDC FAN Motor drive (15.5 V), the relay drive (12 Vdc) and the MICOM and IC (5 Vdc).

The voltage for each part is as follows:

PART	VA 1	CE 3	CE 4	CE 5
VOLTAGE	115 Vac	12 Vdc	15.5 Vdc	5 V


VA1 is a part for preventing over voltage and noise. When 385V or higher power is applied, the inside elements are short-circuited and broken, resulting in blowout of the fuse in order to protect the elements of the secondary part of the TRANSFORMER.

8-2-2 Oscillation Circuit

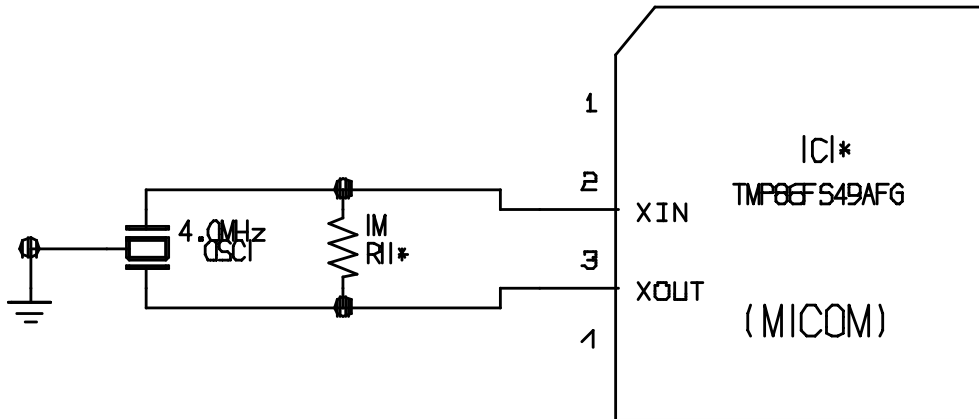

This circuit generates the base clock for calculating time and the synchro clock for transmitting data from and to the inside logic elements of the IC1 (MICOM). Be sure to use specific replacement parts, since calculating time by the IC1 may be changed. If changed, the OSC1 SPEC will not work.


8-2-3 Reset Circuit

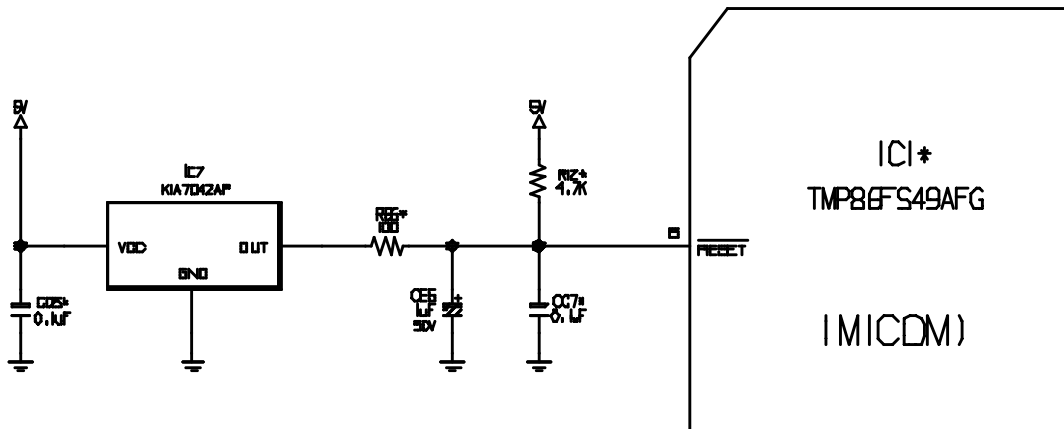

The RESET circuit allows all the functions to start at the initial conditions by initializing various parts, including the RAM inside the MICOM (IC1) when the power is initially supplied or the power supply to the MICOM is restored after a momentary power failure. For the initial 10ms of power supply, LOW voltage is applied to the MICOM RESET terminal. During a normal operation, 5V is applied to the RESET terminal. (If a malfunction occurs in the RESET IC, the MICOM will not operate.)

8-2-4 Load / Buzzer Drive & Open Door Detection Circuit

1. Load Drive Condition Check

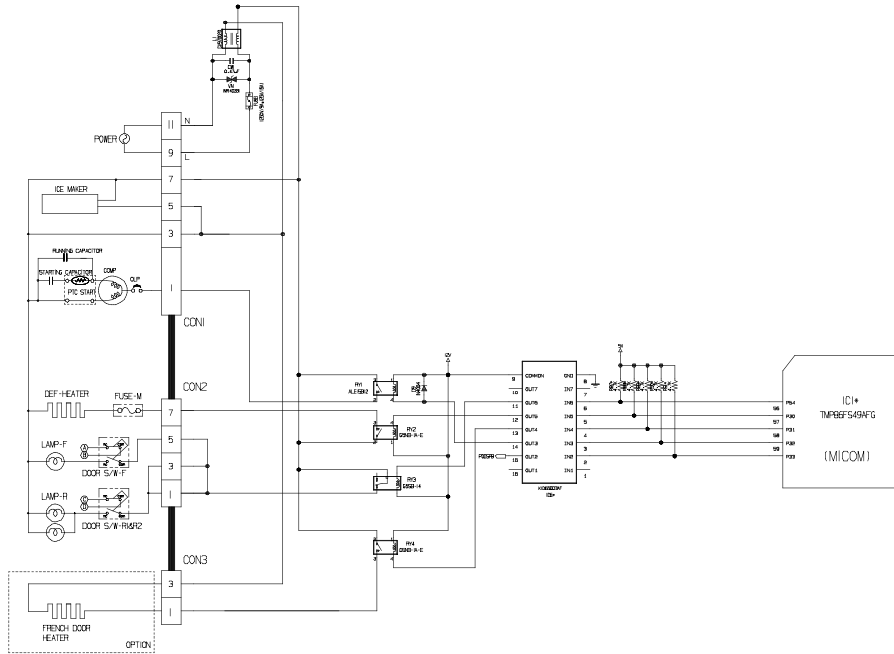


LOAD TYPE		COMP	DEFROSTING HEATER	LAMP	TCM POWER MODE (OPTIONAL)
Measurement Location (IC6)		NO.14	NO.12	NO.11	NO.12
Condition	ON	1V or below			
	OFF	12V			

2. Fan motor driving circuit (freezing compartment fan)

1. This circuit makes standby power 0 by cutting off power supplied to ISs inside of the fan motor in the fan motor OFF.
2. This is a circuit to perform a temporary change of speed for the fan motor and applies DC voltage up to 7.5V ~ 16V to motor
3. This circuit prevents over-driving the fan motor by cutting off power applied to the fan motor in the lock of fan motor by sensing the operation RPM of the fan motor.


	Ⓐ part	Ⓑ part	Ⓒ part
MOTOR OFF	2V or less	0V	5V
MOTOR ON	13V~15V	0V	2V~3V

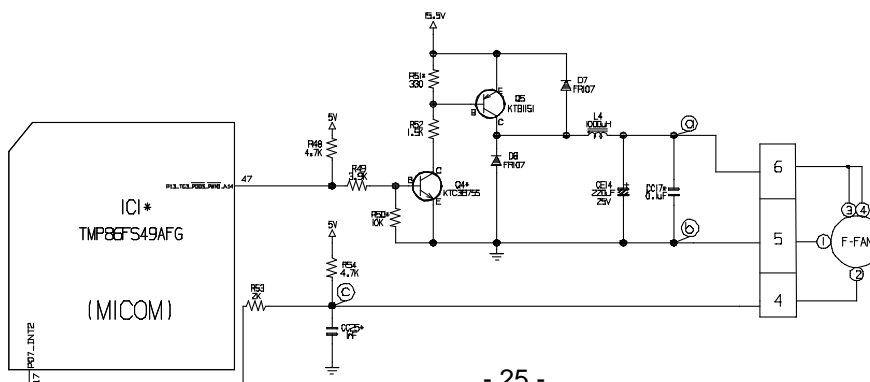


3. Cooling motor driving circuit (machine room)

1. This circuit makes standby power 0 by cutting off power supplied to I_{SS} inside of the fan motor in the fan motor OFF.
2. This circuit prevents over-driving the fan motor by cutting off power applied to the fan motor in the lock of fan motor by sensing the operation RPM of the fan motor.

	(a) Part	(b) Part
MOTOR OFF	2V or less	0V
MOTOR ON	13V - 15V	0V

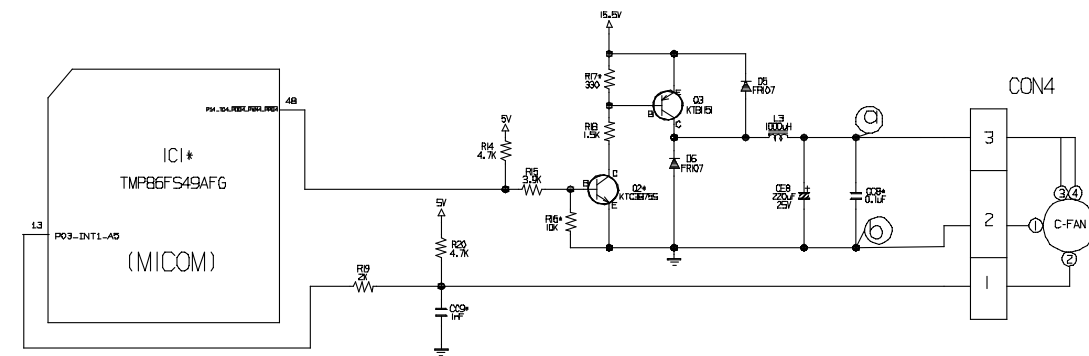


4. Buzzer Drive Condition Check

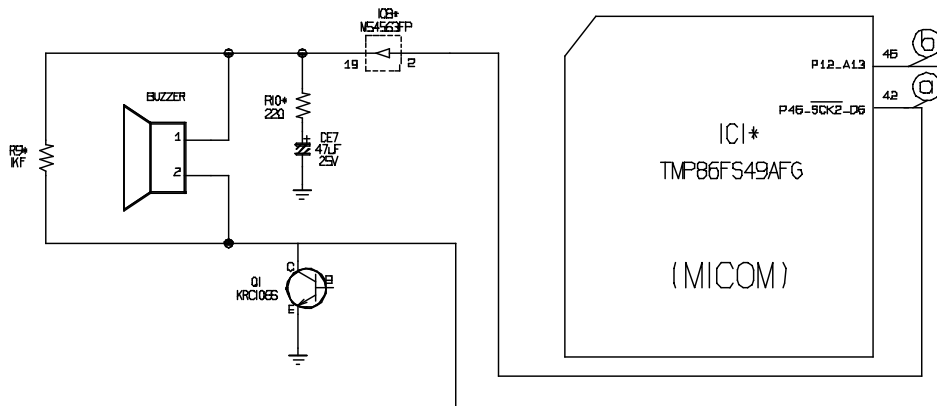


Condition Measurement Location	Tone (Ding~Dong~) when the button on the display is pushed.	Alarm for open door (beep-beep-beep)	OFF
IC1 (A)			0 V
IC1 (B)			0 V

5. Open Door Detection Circuit Check

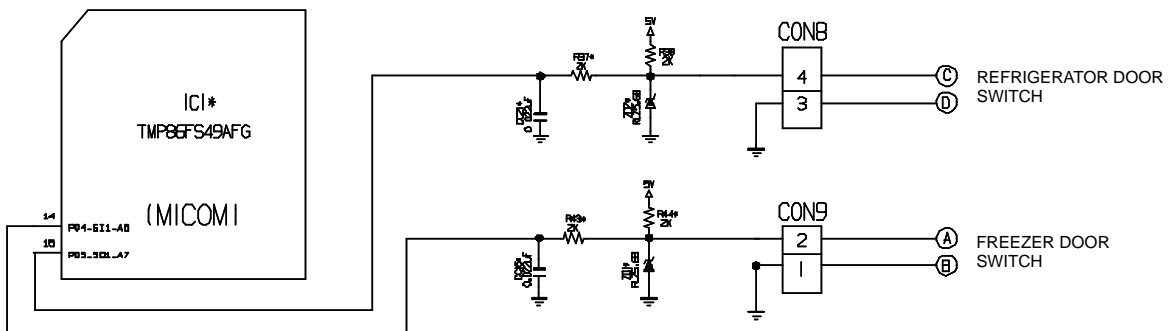

Measurement Location	(PIN NO.15 & PIN NO.14)
Closed	5 V
Open	0 V

8-2-5 Temperature Sensor Circuit

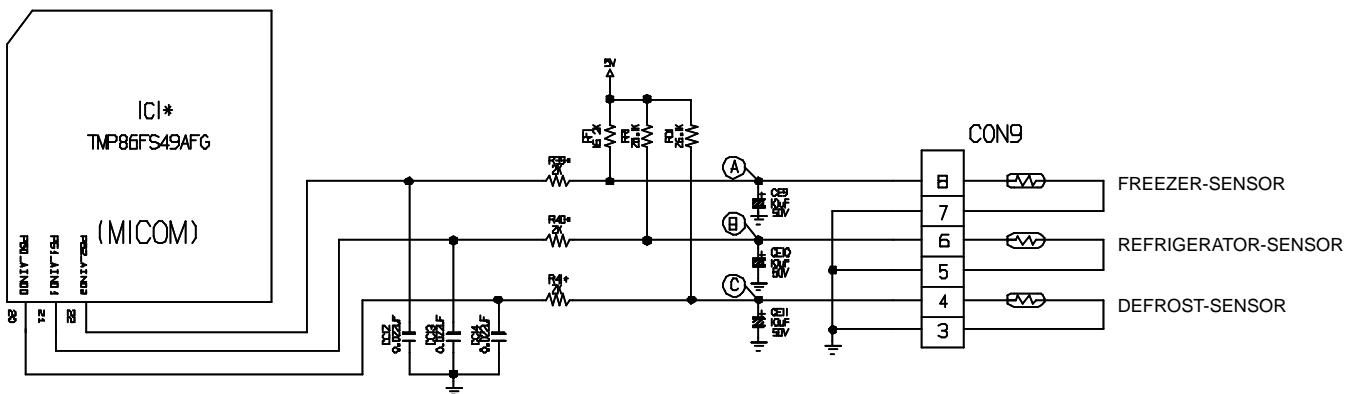


The upper CIRCUIT reads REFRIGERATOR temperature, FREEZER Temperature, and DEFROST-SENSOR temperature for defrosting and the indoor temperature for compensating for the surrounding temperature into MICOM. OPENING or SHORT state of each TEMPERATURE SENSOR are as follows:

SENSOR	CHECK POINT	NORMAL (-30°C ~ 50°C)	SHORT-CIRCUITED	OPEN
Freezer Sensor	POINT (A) Voltage	0.5 V ~ 4.5 V	0 V	5 V
Refrigerator Sensor	POINT (B) Voltage			
Defrosting Sensor	POINT (C) Voltage			


8-2-6 Refrigeration Compartment Stepping Motor Damper Circuit

* The circuit shown below is the damper circuit to regulate the refrigerator temperature.

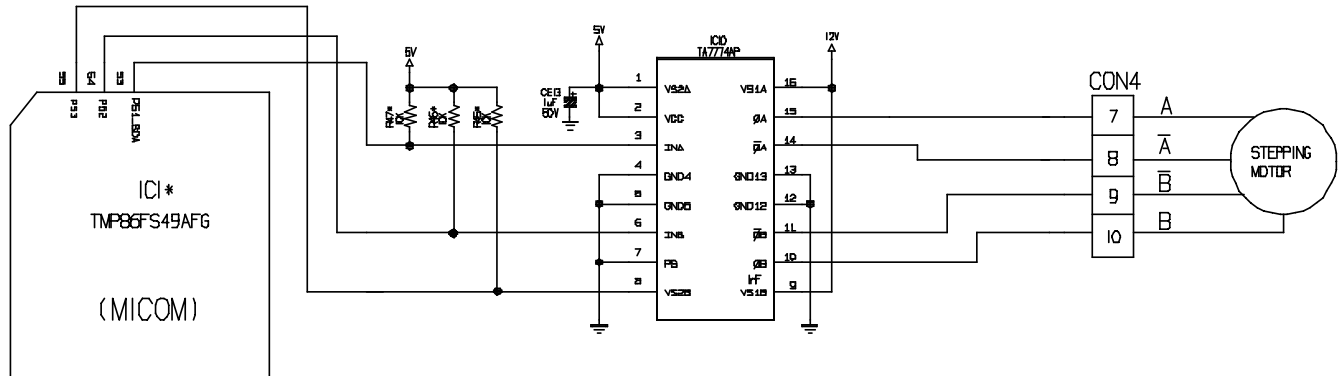

8-2-7 Temperature Compensation & Overcooling/Undercooling Compensation Circuit

1. Refrigerator Temperature Compensation

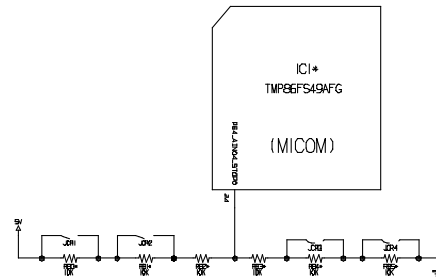


? Table of Refrigerator temperature compensation.


OPTION	CUTTING	Remark
JCR1	R +1.0 deg compensation	Warmer
JCR2	R +1.0 deg compensation	↑
JCR3	R -1.0 deg compensation	↓
JCR4	R -1.0 deg compensation	Colder

8-2-8 Key Button Input & Display Light-On Circuit

? The circuit shown above determines whether a function control key on the operation display is pushed. It also turns on the corresponding function indication LED (LED Module) SEVEN SEGMENT DISPLAY (SEVEN SEGMENT DISPLAY MODULE). The drive type is the scan type

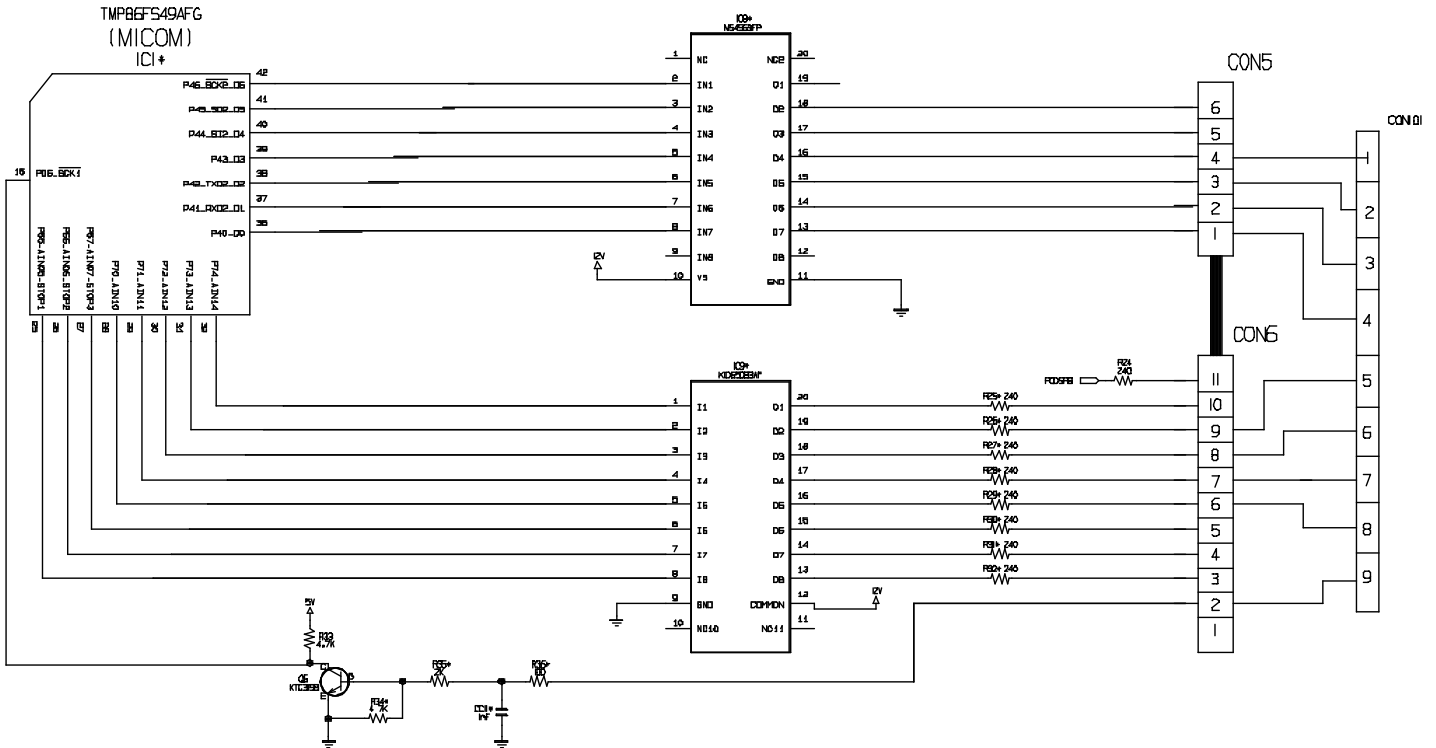

8-2-9 Power Failure Compensation Circuit (DISPENSER MODEL)

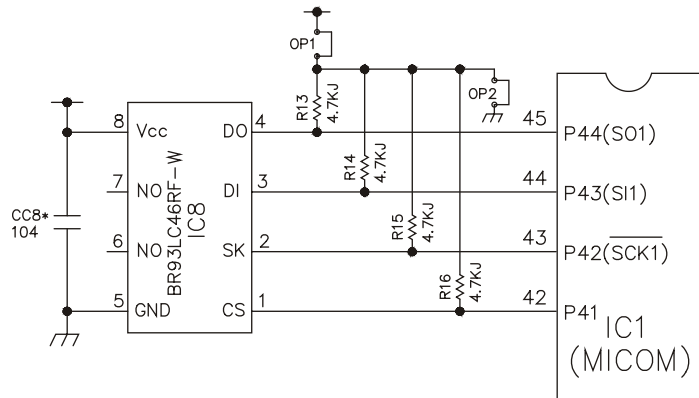

8-3 RESISTANCE SPECIFICATION OF SENSOR

TEMPERATURE DETECTED BY SENSOR	RESISTANCE OF FREEZER SENSOR	RESISTANCE OF REFRIGERATOR & DEFROST SENSOR & ROOM SENSOR
-20° C	22.3 K	77 K
-15° C	16.9 K	60 K
-10° C	13.0 K	47.3 K
- 5° C	10.1 K	38.4 K
0° C	7.8 K	30 K
+ 5° C	6.2 K	24.1 K
+ 10° C	4.9 K	19.5 K
+ 15° C	3.9 K	15.9 K
+ 20° C	3.1 K	13 K
+ 25° C	2.5 K	11 K
+ 30° C	2.0 K	8.9 K
+ 40° C	1.4 K	6.2 K
+ 50° C	0.8 K	4.3 K

- The resistance of the SENSOR has a $\pm 5\%$ common difference.
- Measure the resistance of the SENSOR after leaving it for over 3 minutes in the measuring temperature. This delay is necessary due to sensor response speed.

8-4 TROUBLESHOOTING


PROBLEM	INDICATED BY	CHECK	CHECKING METHOD	CAUSE	SOLUTION
POWER SOURCE is poor.	1. The whole DISPLAY LED/SEVEN SEGMENT DISPLAY's off. 2. DISPLAY LED/SEVEN SEGMENT DISPLAY operates abnormally	1. FREEZER/REFRIGERATOR. 2. If LAMP is dim. 3. The connection of the MAIN PWB CONNECTOR.	Check if FREEZER/REFRIGERATOR DOOR IS OPEN and check display. Check visually. Check connection of CONNECTOR.	POWER SOURCE is poor.	Check outlet Voltage.
				Applied voltage error. CONNECTOR connection is poor. TRANS FUSE is open.	Use boosting TRANS. Reconnect CONNECTOR. Replace TRANS.
COOLING is poor.	NO COOLING.	1. If the COMPRESSOR operate. 2. If refrigerant is leaking.	USE TEST MODE1 (forced COOLING). If less than 7 minutes pass after compressor shuts off, don't press the KEY and wait. Measure the amount of frost sticking on EVAPORATOR and the surface temperature of the condenser pipe.	COMPRESSOR locked or blocked. OLP, PTC is poor. COMPRESSOR RELAY is poor. THE CONNECTING WIRE is poor.	Replace COMPRESSOR. Replace OLP, PTC. Replace MAIN PWB. Check the connection of the black wire of the MAIN PWB CONNECTOR (CON2).
				Refrigerant leakage. FAN MOTOR is poor. CONNECTING WIRE is poor.	Replace the leaking part and replace any lost refrigerant. Replace the FAN MOTOR. Certify the MOTOR and the connection of the black wire of the MAIN PWB CONNECTOR (CON2).
FREEZER TEMPERATURE is incorrect	1. If FANMOTOR operates. USE TEST MODE1 (forced COOLING).	1. If DEFROSTING is normal. 3. If SENSOR is normal. 4. Door Line contact.	Check the amount of frost sticking on the EVAPORATOR. Check the resistance of the Refrigerator SENSOR. Check the seal when the door is closed.	DEFROSTING is poor.	See DEFROSTING is poor.
				SENSOR RESISTANCE is poor.	Replace SENSOR.
				Door liner damaged.	Replace door liner.

PROBLEM	INDICATED BY	CHECK	CHECKING METHOD	CAUSE	SOLUTION
COOLING is poor.	If REFRIGERATOR TEMPERATURE is too low.	1.If FREEZER TEMPERATURE Is normal.	Check is FREEZER TEMPERATURE is too low.	FAN MOTOR is poor.	Make sure the DOOR is attached.
		2. If amount of cool air from FAN MOTOR is sufficient.	Make sure that the amount and speed of cool air are sufficient by touching the check supplied on the REFRIGERATOR.	Passage of cool air is blocked. EVA frozen.	Replace FAN MOTOR. Remove impurities.
		3. Door Line contact:	Check door seal when door is closed.	Door liner damaged.	Replace Door liner.
DEFROSTING is poor.	NO DEFROSTING.	1. If HEATER emits heat.	USE TEST MODE2 (forced DEFROSTING).	HEATER disconnection.	Replace HEATER.
				TEMPERATURE FUSE disconnection.	Replace TEMPERATURE FUSE.
				Connection is poor.	Check EVAPORATOR connection and wire of MAIN PWB CONNECTOR.
		2. If DRAIN PIPE is blocked.	Check DRAIN PIPE.	DEFROST-SENSOR is poor.	Replace DEFROST-SENSOR.
				HEATER RELAY is poor.	Replace Ry2 of MAIN PWB.
				DRAIN PIPE is blocked.	Remove ice and impurities. Check HEATER PLATE resistance.
		3. If ice remains after DEFROSTING.	Make sure that DEFROST SENSOR is connected. Make sure that FREEZER / REFRIGERATOR DOOR is closed.	Connection is poor.	Reassemble the DEFROST-SENSOR.
				DOOR does not close properly.	Reassemble DOOR.
					Replace GASKET.


8-5 MAIN PWB ASSEMBLY AND PARTS LIST

8-5-1 Main PWB Assembly


TOP VIEW

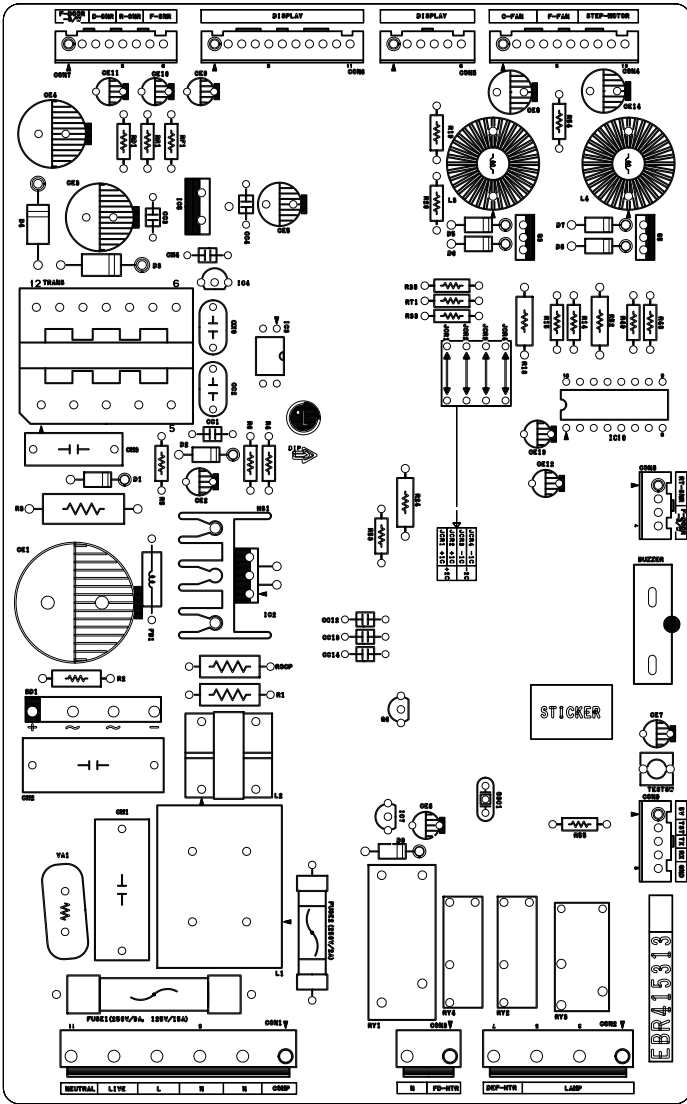

BOTTOM VIEW

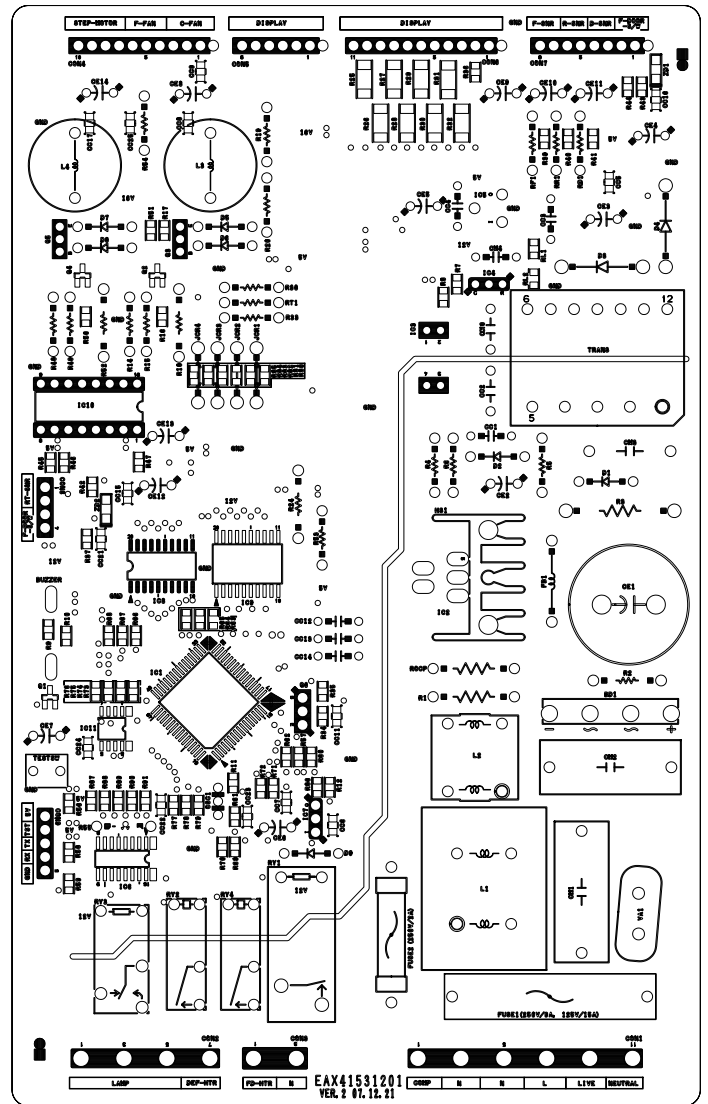


8-5-3 PWB Assembly, Display and Parts List

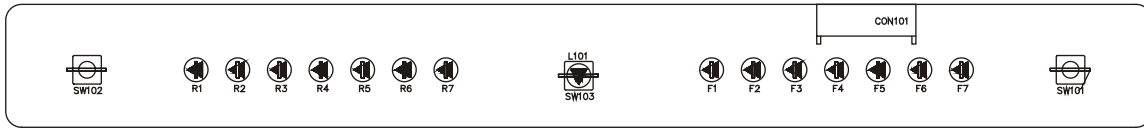


Qty	No	P/NO	DESCRIPTION	SPEC	MAKER	REMARK
1	1	6870JB8091A	PWB(PCB)	KS-PJT GOOD/BETTER DISPLAY	DOO SAN	t=1.6
	2					
1	3	6630AQ9159H	WAFER	SMAW250-09	YEON HD	CON101
	4					
2	5	6600RRT002K 6600JB8005A	SWITCH,TACT	JTP1230A JEIL 12V DC 50MA KPT-1105A	JEIL KYUNG IN	SW101,102
1	6	-	TACT S/W	KPT-1109G	KYUNG IN	SW103
14	7	0DLLE0019AA	LED	LT1824-81-BCM TP GREEN 2		R1~R7,F1~F7
3	8	0DD414809AA	DIODE,SWITCHING	1N4148 26MM	PYUNG CHANG DELTA	D101,102,103
12	10	6854B50001A	JUMP WIRE	0.6MM 52MM TP TAPING SN (10MM)	-	J101~J112
	11					
-	12	9VWF0120000	SOLDER(RDSIN WIRE) RSO	D1.20	HEE SUNG	-
001	13	49111004	SOLDER,SOLDERING	H63A	-	-
0.0005	14	59333105	FLUX	SG;0.825-0.830 KOREA F.H-206	KOKI	-

8-6 PWB DIAGRAM

8-6-1 PWB Main Assembly

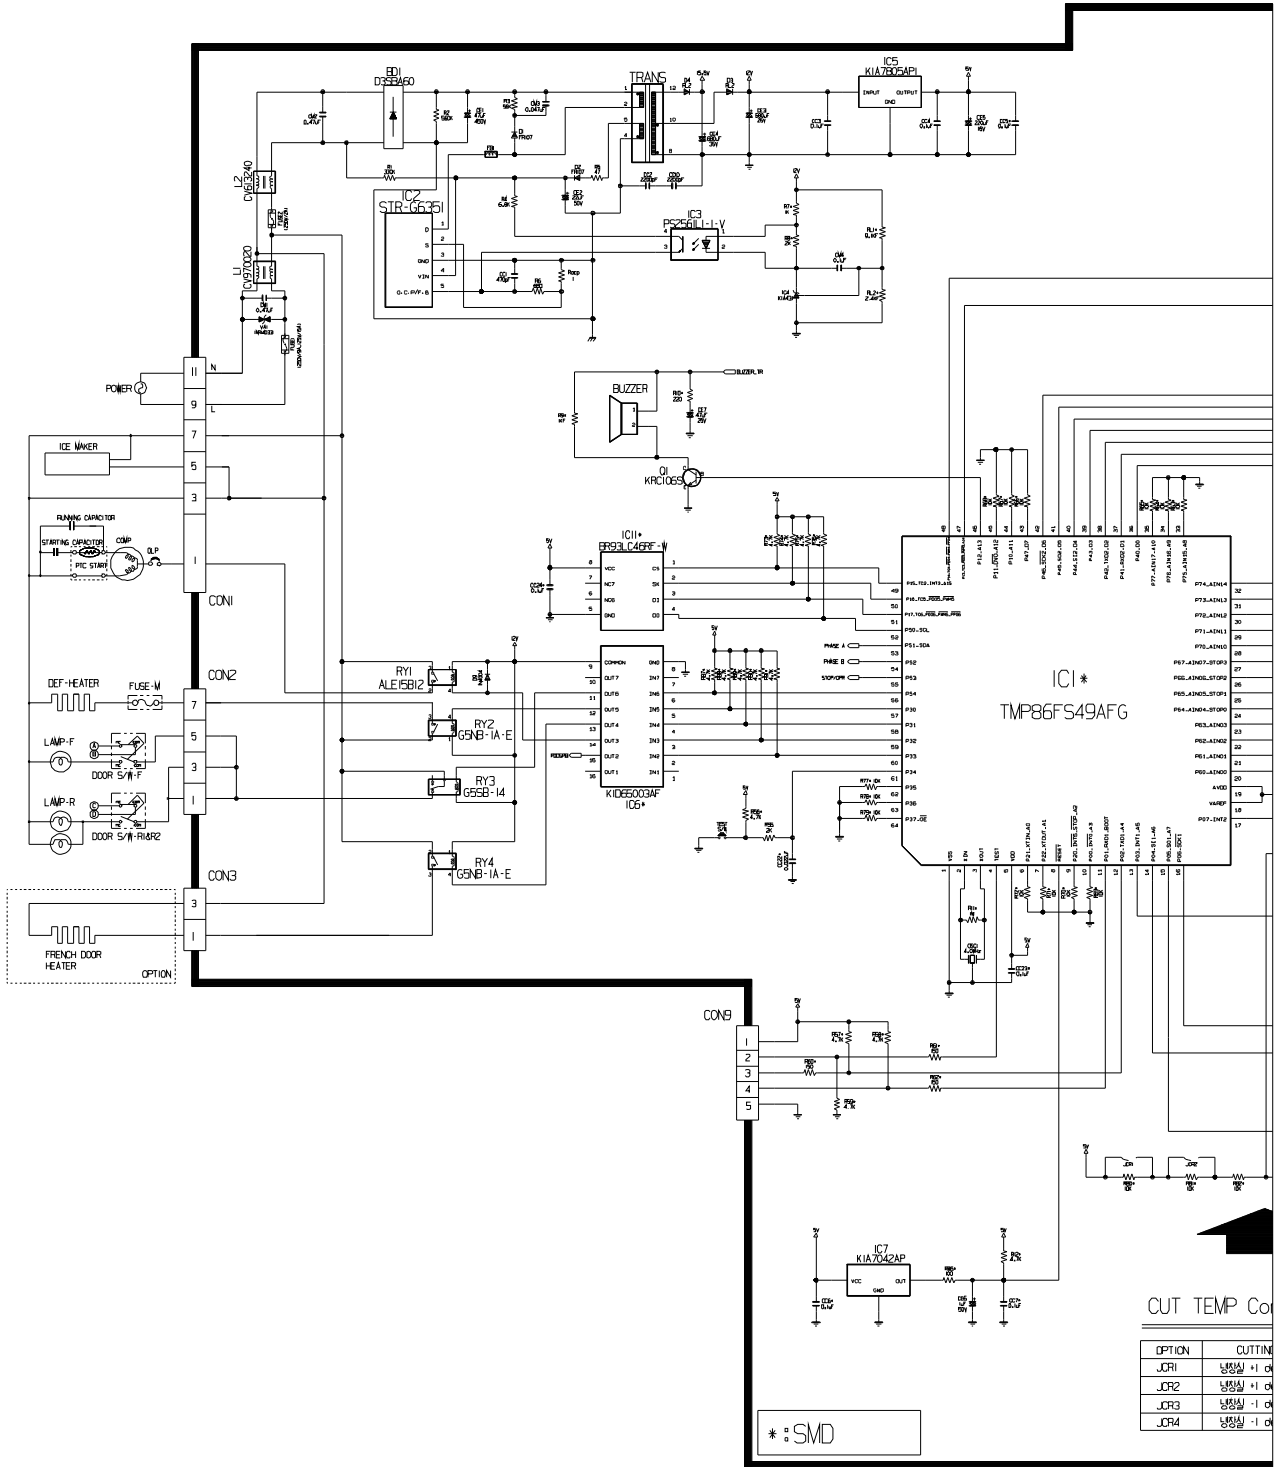


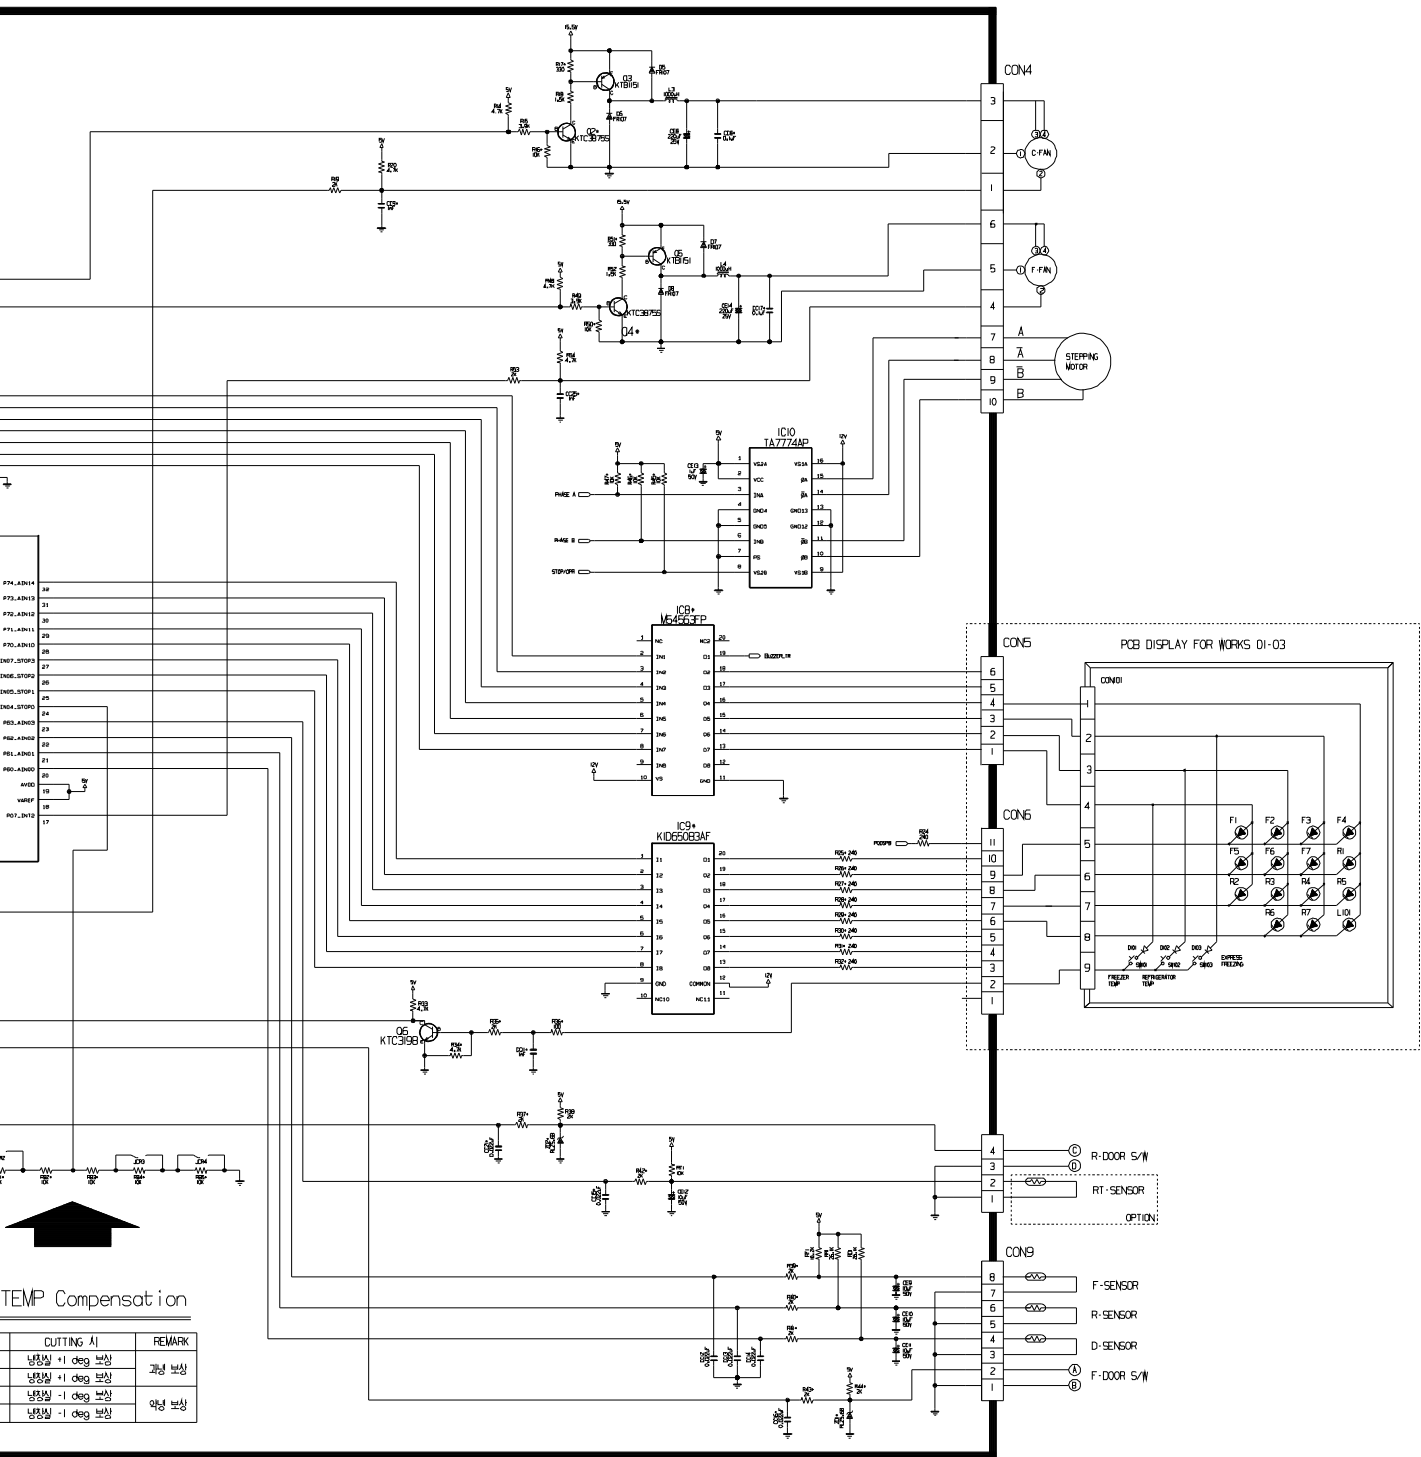

9. EXPLODED VIEW AND REPLACEMENT PARTS LIST


CASE PARTS

CAUTION: Use the part number to order part, not the position number

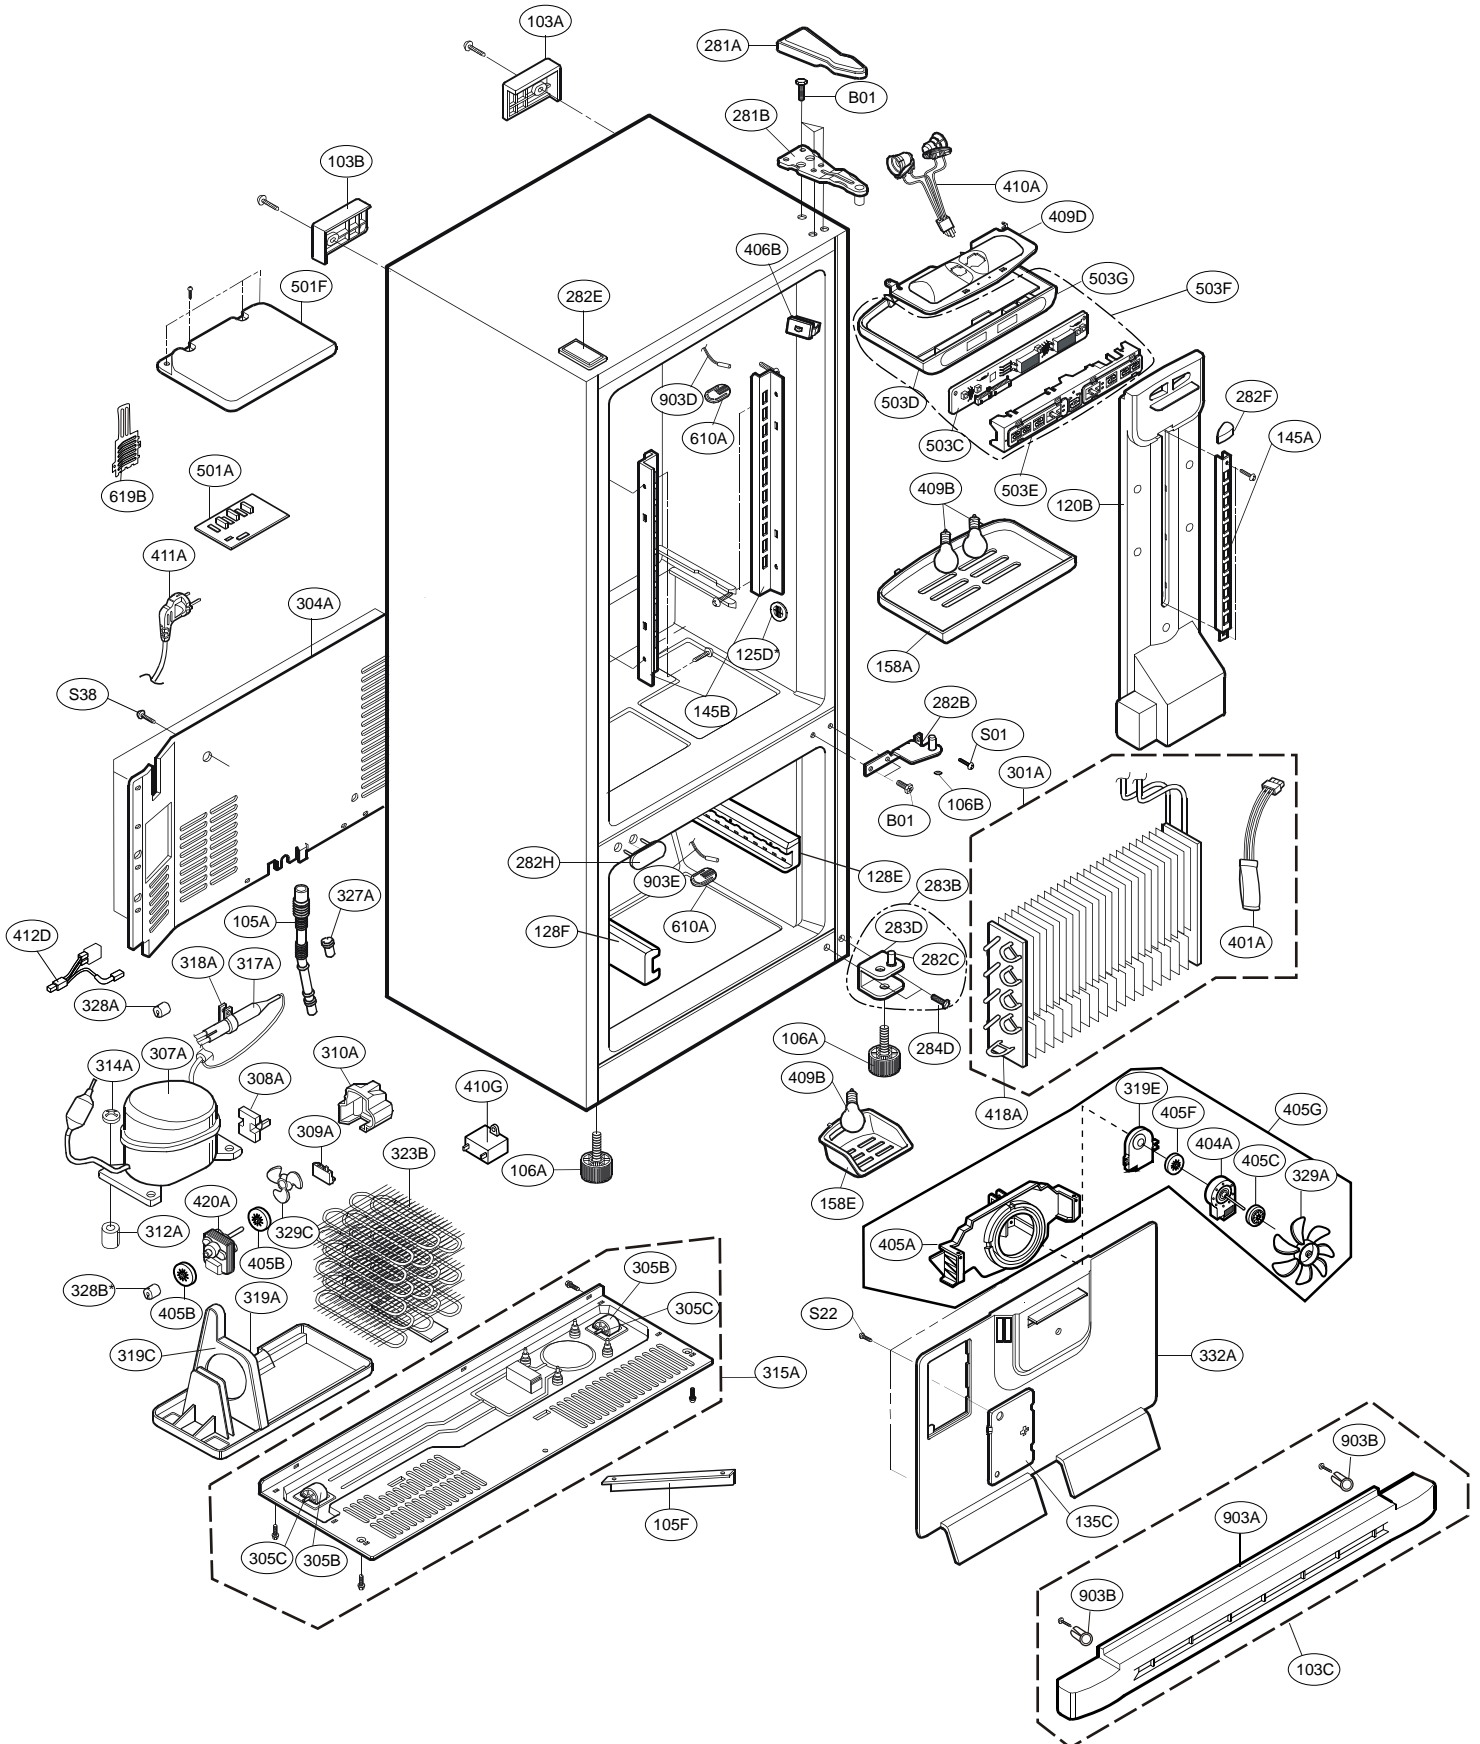


FREEZER PARTS

Caution: Use the part number to order part, not the position number

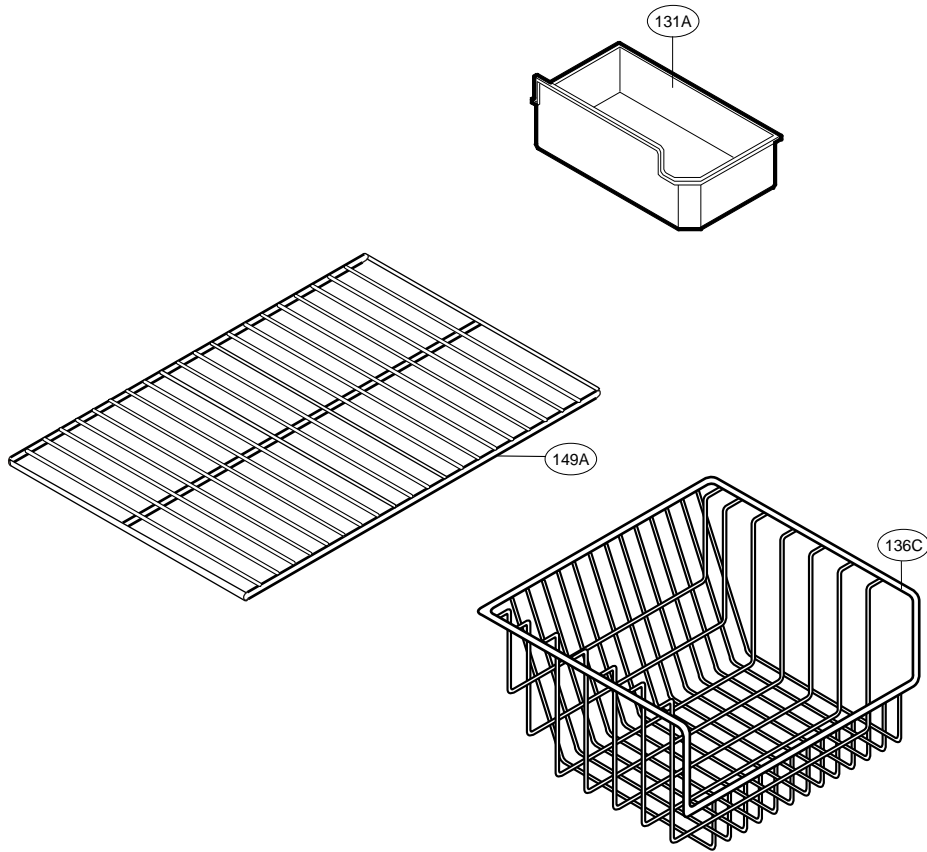


REFRIGERATOR PARTS

Caution: Use the part number to order part, not the position number.

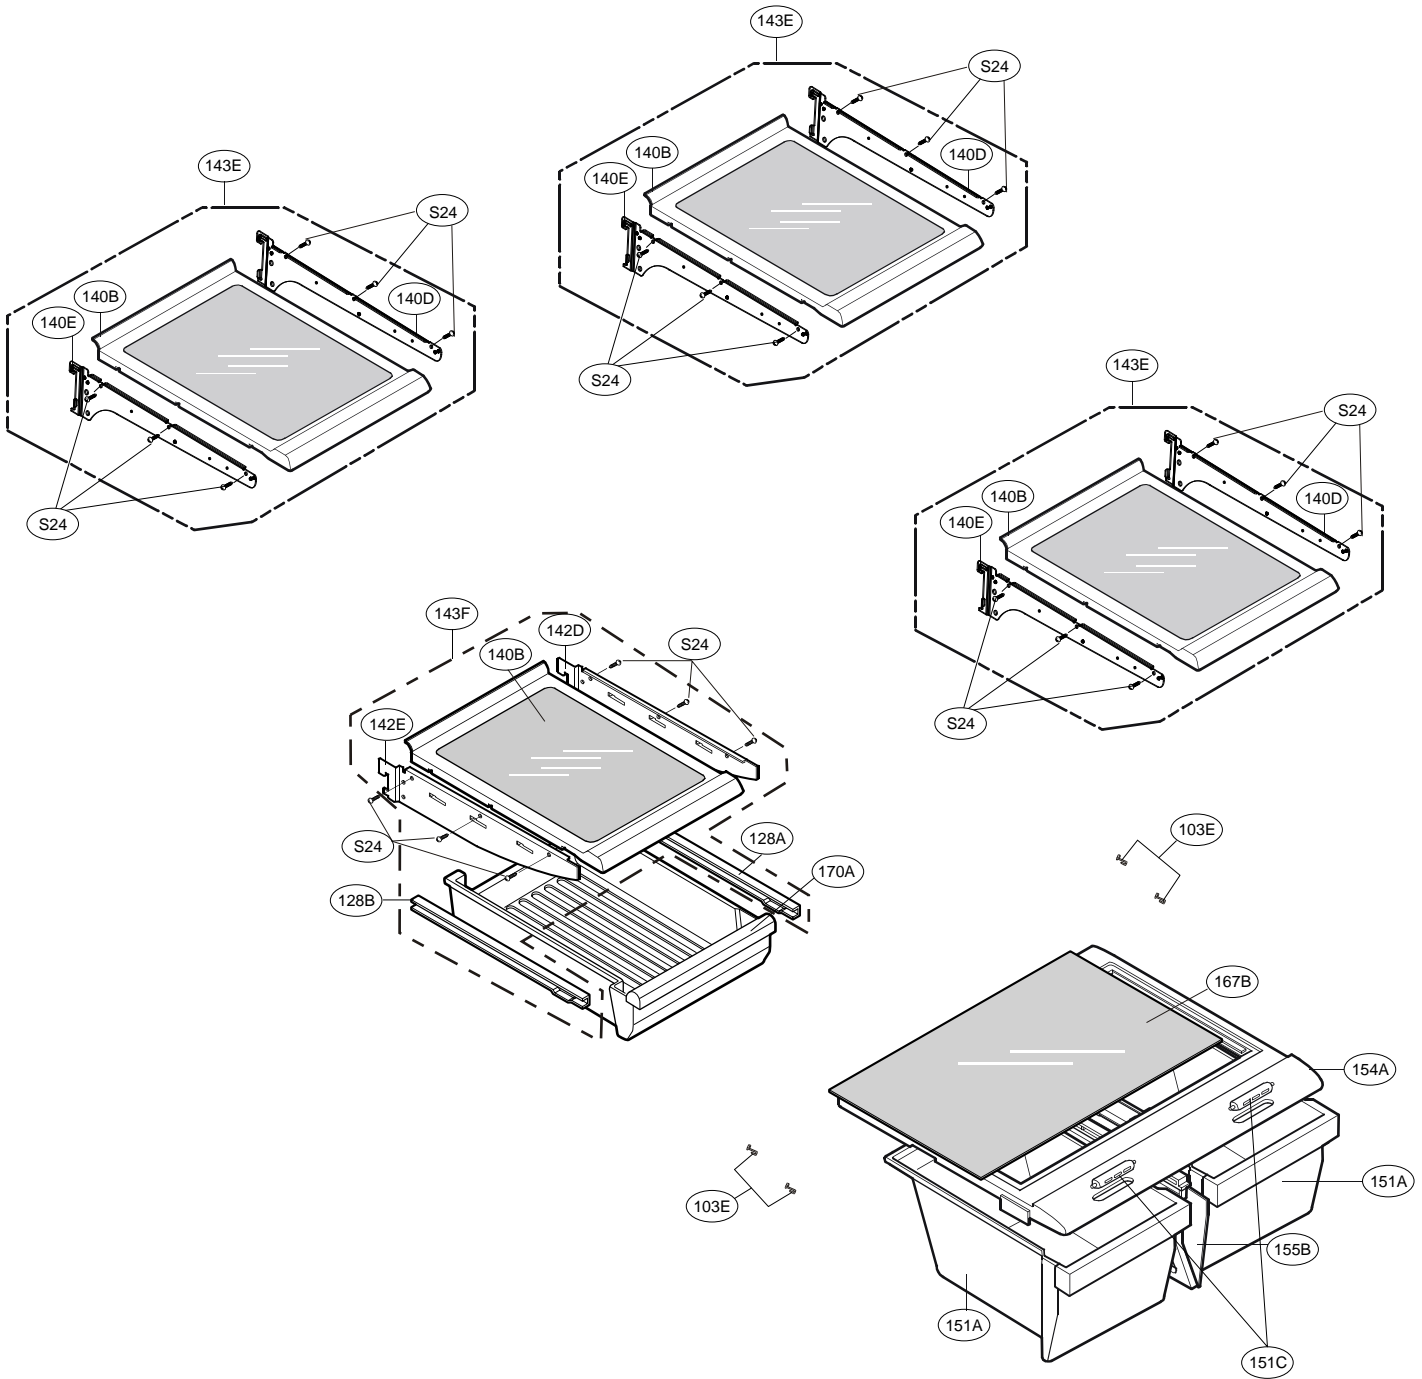


DOOR PARTS

CAUTION: Use the part number to order part, not the position number.

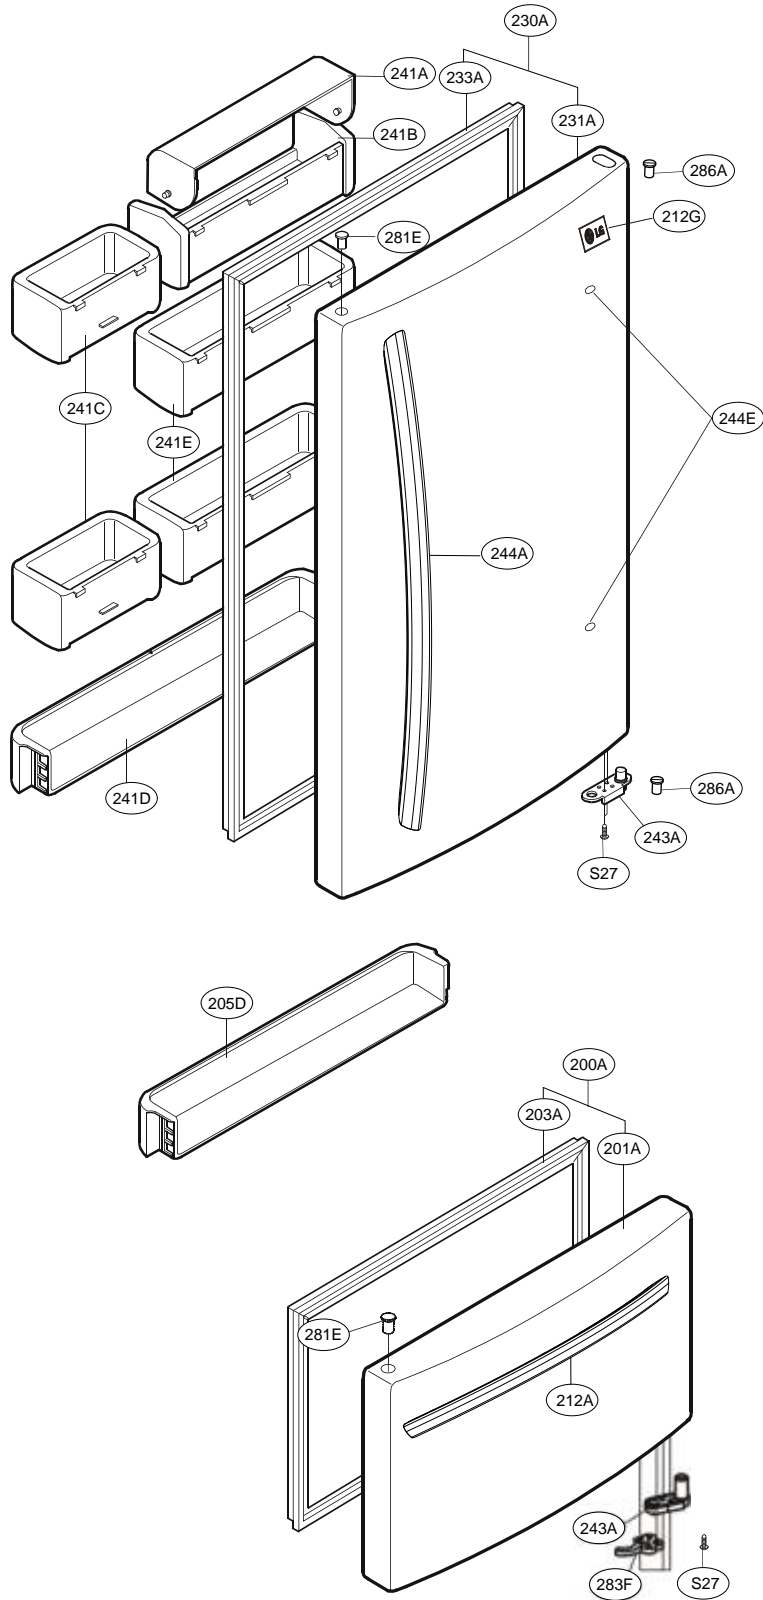

ICE AND WATER PARTS

CAUTION: Use the part number to order part, not the position number.

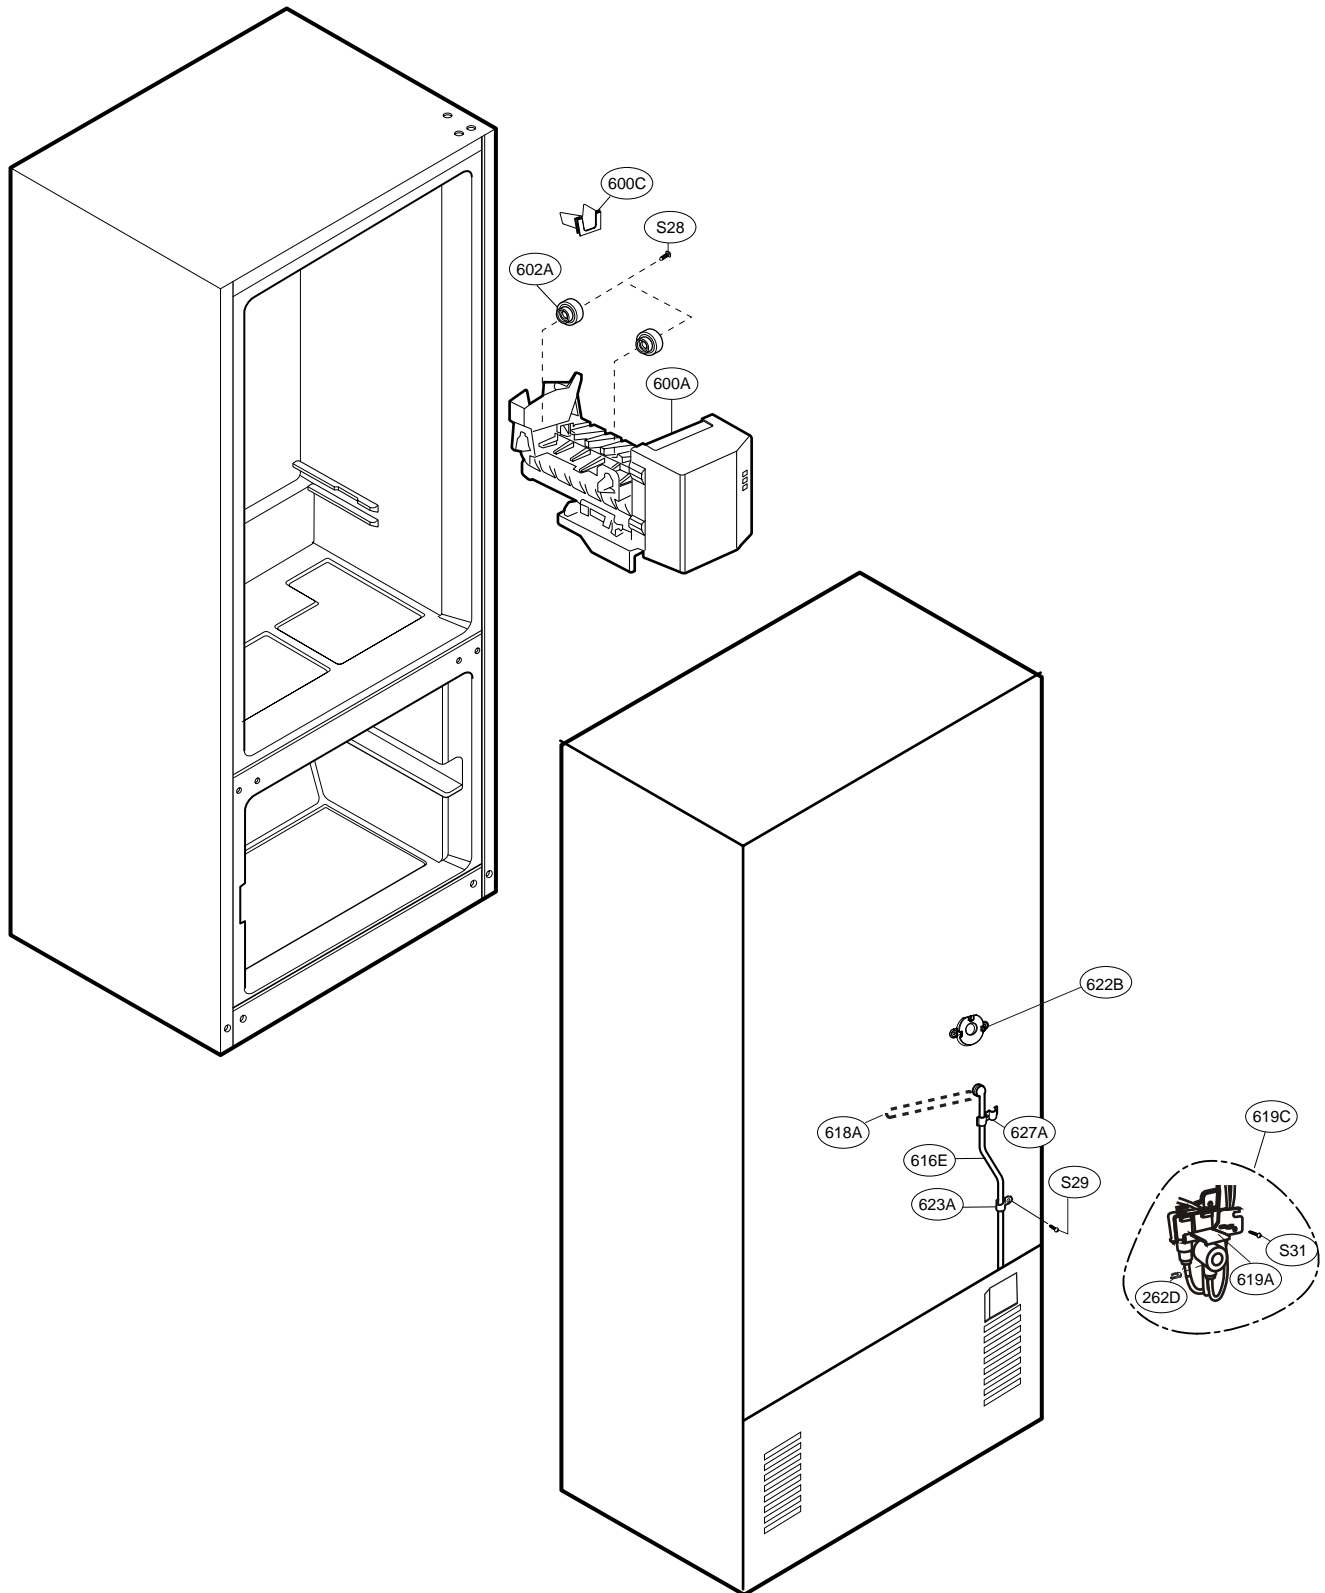

LBC22520TT

LOC NO	PART NO	DESCRIPTION	LOC NO	PART NO	DESCRIPTION
103A	3650JJ2003H	Handle,Rear	305C	4J04238A	Pin,Common
103B	3650JJ2003D	Handle,Rear	307A	2521JJ8008B	Compressor,Set Assembly
103C	3551JJ1015H	Cover Assembly,Lower	308A	6748JJ8005B	Thermistor,PTC
103E	5218JJ3001A	Rail,Slide	309A	6750JJ8004B	Overload Protect
105A	5250JA2009B	Tube,Drain	310A	3550JJ8003A	Cover,PTC
105F	5070JJ3002A	Skirt,Lower	312A	5040JA3031A	Damper,Compressor
106A	4779JA2003A	Leg Assembly,Adjust	314A	4620JA3009A	Stopper,Compressor
106B	4J00382C	Washer,Common	315A	3103JJ1001J	Base Assembly,Compressor
120B	5209JJ1002A	Duct Assembly,Multi	317A	5851JJ2002F	Drier Assembly
125D	4930JJ3007A	Holder,Bracket	318A	4930JA3034A	Holder,Drier
128A	4975JJ2002A	Guide Assembly,Rail	319A	3390JJ0004A	Tray,Drip
128B	4975JJ2002B	Guide Assembly,Rail	319C	MEA41997401	Guide,Fan
128E	4930JJ1012A	Holder,Rail	319E	4810JJ2005A	Bracket,Motor
128F	4930JJ1012B	Holder,Rail	323B	5403JJ1007A	Condenser Assembly,Wire
131A	5074JJ1017A	Bucket,Ice	327A	5006JA3034A	Cap,Drain Tube
135C	3550JJ2030A	Cover,Grille Fan	328A	4J03020A	Damper,Pipe
136C	3390JJ1057A	Tray,Drawer	329A	5901JJ1005A	Fan Assembly
140B	5027JJ2007B	Shelf Assembly,Refrigerator	329C	ADP36665702	Fan Assembly
140D	MHL38615403	Shelf,Net	332A	3531JJ1004A	Grille Assembly,Fan
140E	MHL38615404	Shelf,Net	401A	6615JB2005C	Controller Assembly
142D	5026JJ2001L	Shelf,Net	404A	4681JK1004A	AC Motor
142E	5026JJ2001M	Shelf,Net	405A	4811JJ2002A	Bracket Assembly,Motor
143E	5027JJ1008K	Shelf Assembly,Refrigerator	405B	5040JJ2001A	Damper,Motor Support
143F	5027JJ1008D	Shelf Assembly,Refrigerator	405C	5040JA2009B	Damper,Motor Support
145A	4930JJ2003A	Holder,Shelf	405F	5040JA2004B	Damper,Motor Support
145B	4930JJ2004A	Holder,Shelf	405G	4811JJ2002H	Bracket Assembly,Motor
149A	5026JJ1026A	SHELF,FREEZER	406B	6600JB1004A	Switch,Push Button
151A	3391JJ1038A	TRAY ASSEMBLY,VEGETABLE	409B	6912JB2004M	Lamp,Incandescent
154A	3550JJ1108A	Cover,TV	409D	3034JJ1002B	Reflector,Lamp
155B	4980JJ1016A	SUPPORTER,COVER TV	410A	6621JK2002D	Drawing,Assembly
158A	3550JJ1040A	Cover,Lamp	410G	0CZZJB2012J	Capacitor,Electric Appliance Film,Box
158E	MCK30060901	Cover,Lamp	411A	6411JK1006A	Power Cord Assembly
167B	4890JL1002H	Shelf,Glass	412D	6877JK2011B	Drawing,Assembly
170A	3391JJ2018A	Tray Assembly,Meat	418A	5300JB1100J	Heater,Sheath
200A	3581JJ8020X	Door Assembly,Freezer	420A	4681JB1029J	Motor,DC
201A	ADD55827503	Door Foam Assembly,Freezer	501A	EBR41531303	PCB Assembly,Main
203A	4987JJ1004Z	Gasket Assembly,Door	501F	3551JJ1020A	Cover Assembly,PCB
205D	5004JJ1040A	Basket,Door	503C	6871JB2047A	PCB Assembly,Display
212A	AED37133109	Handle Assembly,Freezer	503D	3110JJ1005A	Case,Display
212G	3846JD1007H	Name Plate	503E	3550JJ2031A	Cover,Display
230A	3581JJ8716K	Door Assembly,Refrigerator	503F	ABQ33905301	Case Assembly,Display
231A	ADD30931304	Door Foam Assembly,Refrigerator	503G	3806JL1049A	Decor,Control
233A	ADX52752603	Gasket Assembly,Door	600A	5989JA0002N	Ice Maker Assembly,Kit
241A	3550JL2003H	Cover,Tray	600C	MEA32865501	Guide,Tube
241B	5004JJ1021A	Basket,Door	602A	4931JA3005B	Holder Assembly,Bracket
241C	5005JJ2017A	Basket Assembly,Door	610A	3550JJ2020A	Cover,Sensor
241D	5005JJ2020A	Basket Assembly,Door	616E	5211JA2003B	Tube Assembly,Inject
241E	5005JJ2018A	Basket Assembly,Door	618A	5210JJ3006B	Tube,Inject
243A	4620JJ3006D	Stopper,Door	619A	5220JA2009D	Valve,Water
244A	AED37082901	Handle Assembly,Refrigerator	619B	3550JJ2024A	Cover,Valve
244E	5006JJ3016D	Cap,Handle	619C	AJU55759301	Valve Assembly,Water
262D	4004JA3002A	Clip	622B	MJH36429401	Supporter,Tube Guide
281A	3550JJ2013D	Cover,Hinge	623A	4770JA3001A	Band
281B	4775JJ2003B	Hinge Assembly,Upper	627A	4930JA3054A	Holder,Pipe
281E	5006JJ3014D	Cap,Hinge	903A	3550JJ0006D	Cover,Lower
282B	4775JJ8002H	Hinge Assembly,Center	903B	4930JJ2021A	Holder,Cover(Lower)
282C	1PZZJJ3002F	Pin,Common	903D	6500JK1003A	Sensor
282E	5006JJ2001G	Cap,Hinge	903E	6500JK1004A	Sensor
282F	3806JL2006F	Decor,Duct	B01	1STZJA3004F	Screw,Customized
282H	5006JJ3004F	Cap,Hinge	S01	1SZZJJ3010A	Screw,Customized
283B	4775JJ2007B	Hinge Assembly,Lower	S22	J47100001J	Screw,Customized
283D	4774JJ2002A	Hinge,Lower	S24	1SZZJA3011B	Screw,Customized
283F	MJB36873202	Stopper,Door	S27	4J01424C	Screw,Customized
284D	1STZJA3004K	Screw,Customized	S28	1SZZJJ3005E	Screw,Customized
286A	4984JJ3003A	BUSH	S29	4J00415D	Screw,Customized
301A	5421JJ1001B	Evaporator Assembly	S31	4000W4A003A	Screw,Customized
304A	3551JJ2008B	Cover Assembly,Machinery(Rear)	S38	4J00415D	Screw,Customized
305B	4580JJ3001A	Roller			

LBC22520ST

LOC NO	PART NO	DESCRIPTION	LOC NO	PART NO	DESCRIPTION
103A	3650JJ2003H	Handle,Rear	305C	4J04238A	Pin,Common
103B	3650JJ2003D	Handle,Rear	307A	2521JJ8008B	Compressor,Set Assembly
103C	3551JJ1015H	Cover Assembly,Lower	308A	6748JJ8005B	Thermistor,PTC
103E	5218JJ3001A	Rail,Slide	309A	6750JJ8004B	Overload Protect
105A	5250JA2009B	Tube,Drain	310A	3550JJ8003A	Cover,PTC
105F	5070JJ3002A	Skirt,Lower	312A	5040JA3031A	Damper,Compressor
106A	4779JA2003A	Leg Assembly,Adjust	314A	4620JA3009A	Stopper,Compressor
106B	4J00382C	Washer,Common	315A	3103JJ1001J	Base Assembly,Compressor
120B	5209JJ1002A	Duct Assembly,Multi	317A	5851JJ2002F	Drier Assembly
125D	4930JJ3007A	Holder,Bracket	318A	4930JA3034A	Holder,Drier
128A	4975JJ2002A	Guide Assembly,Rail	319A	3390JJ0004A	Tray,Drip
128B	4975JJ2002B	Guide Assembly,Rail	319C	MEA41997401	Guide,Fan
128E	4930JJ1012A	Holder,Rail	319E	4810JJ2005A	Bracket,Motor
128F	4930JJ1012B	Holder,Rail	323B	5403JJ1007A	Condenser Assembly,Wire
131A	5074JJ1017A	Bucket,Ice	327A	5006JA3034A	Cap,Drain Tube
135C	3550JJ2030A	Cover,Grille Fan	328A	4J03020A	Damper,Pipe
136C	3390JJ1057A	Tray,Drawer	329A	5901JJ1005A	Fan Assembly
140B	5027JJ2007B	Shelf Assembly,Refrigerator	329C	ADP36665702	Fan Assembly
140D	MHL38615403	Shelf,Net	332A	3531JJ1004A	Grille Assembly,Fan
140E	MHL38615404	Shelf,Net	401A	6615JB2005C	Controller Assembly
142D	5026JJ2001L	Shelf,Net	404A	4681JK1004A	AC Motor
142E	5026JJ2001M	Shelf,Net	405A	4811JJ2002A	Bracket Assembly,Motor
143E	5027JJ1008K	Shelf Assembly,Refrigerator	405B	5040JJ2001A	Damper,Motor Support
143F	5027JJ1008D	Shelf Assembly,Refrigerator	405C	5040JA2009B	Damper,Motor Support
145A	4930JJ2003A	Holder,Shelf	405F	5040JA2004B	Damper,Motor Support
145B	4930JJ2004A	Holder,Shelf	405G	4811JJ2002H	Bracket Assembly,Motor
149A	5026JJ1026A	SHELF,FREEZER	406B	6600JB1004A	Switch,Push Button
151A	3391JJ1038A	TRAY ASSEMBLY,VEGETABLE	409B	6912JB2004M	Lamp,Incandescent
154A	3550JJ1108A	Cover,TV	409D	3034JJ1002B	Reflector,Lamp
155B	4980JJ1016A	SUPPORTER,COVER TV	410A	6621JK2002D	Drawing,Assembly
158A	3550JJ1040A	Cover,Lamp	410G	0CZZJB2012J	Capacitor,Electric Appliance Film,Box
158E	MCK30060901	Cover,Lamp	411A	6411JK1006A	Power Cord Assembly
167B	4890JL1002H	Shelf,Glass	412D	6877JK2011B	Drawing,Assembly
170A	3391JJ2018A	Tray Assembly,Meat	418A	5300JB1100J	Heater,Sheath
200A	3581JJ8020W	Door Assembly,Freezer	420A	4681JB1029J	Motor,DC
201A	ADD55827502	Door Foam Assembly,Freezer	501A	EBR41531303	PCB Assembly,Main
203A	4987JJ1004Z	Gasket Assembly,Door	501F	3551JJ1020A	Cover Assembly,PCB
205D	5004JJ1040A	Basket,Door	503C	6871JB2047A	PCB Assembly,Display
212A	AED37133109	Handle Assembly,Freezer	503D	3110JJ1005A	Case,Display
212G	3846JD1007H	Name Plate	503E	3550JJ2031A	Cover,Display
230A	3581JJ8716J	Door Assembly,Refrigerator	503F	ABQ33905301	Case Assembly,Display
231A	ADD30931303	Door Foam Assembly,Refrigerator	503G	3806JL1049A	Decor,Control
233A	ADX52752603	Gasket Assembly,Door	600A	5989JA0002N	Ice Maker Assembly,Kit
241A	3550JL2003H	Cover,Tray	600C	MEA32865501	Guide,Tube
241B	5004JJ1021A	Basket,Door	602A	4931JA3005B	Holder Assembly,Bracket
241C	5005JJ2017A	Basket Assembly,Door	610A	3550JJ2020A	Cover,Sensor
241D	5005JJ2020A	Basket Assembly,Door	616E	5211JA2003B	Tube Assembly,Inject
241E	5005JJ2018A	Basket Assembly,Door	618A	5210JJ3006B	Tube,Inject
243A	4620JJ3006D	Stopper,Door	619A	5220JA2009D	Valve,Water
244A	AED37082901	Handle Assembly,Refrigerator	619B	3550JJ2024A	Cover,Valve
244E	5006JJ3016D	Cap,Handle	619C	AJU55759301	Valve Assembly,Water
262D	4004JA3002A	Clip	622B	MJH36429401	Supporter,Tube Guide
281A	3550JJ2013D	Cover,Hinge	623A	4770JA3001A	Band
281B	4775JJ2003B	Hinge Assembly,Upper	627A	4930JA3054A	Holder,Pipe
281E	5006JJ3014D	Cap,Hinge	903A	3550JJ0006D	Cover,Lower
282B	4775JJ8002H	Hinge Assembly,Center	903B	4930JJ2021A	Holder,Cover(Lower)
282C	1PZZJJ3002F	Pin,Common	903D	6500JK1003A	Sensor
282E	5006JJ2001G	Cap,Hinge	903E	6500JK1004A	Sensor
282F	3806JL2006F	Decor,Duct	B01	1STZJA3004F	Screw,Customized
282H	5006JJ3004F	Cap,Hinge	S01	1SZZJJ3010A	Screw,Customized
283B	4775JJ2007B	Hinge Assembly,Lower	S22	J47100001J	Screw,Customized
283D	4774JJ2002A	Hinge,Lower	S24	1SZZJA3011B	Screw,Customized
283F	MJB36873202	Stopper,Door	S27	4J01424C	Screw,Customized
284D	1STZJA3004K	Screw,Customized	S28	1SZZJJ3005E	Screw,Customized
286A	4984JJ3003A	BUSH	S29	4J00415D	Screw,Customized
301A	5421JJ1001B	Evaporator Assembly	S31	4000W4A003A	Screw,Customized
304A	3551JJ2008B	Cover Assembly,Machinery(Rear)	S38	4J00415D	Screw,Customized
305B	4580JJ3001A	Roller			

LBC22520SW

LOC NO	PART NO	DESCRIPTION	LOC NO	PART NO	DESCRIPTION
103A	3650JJ2003E	Handle,Rear	305B	4580JJ3001A	Roller
103B	3650JJ2003A	Handle,Rear	305C	4J04238A	Pin,Common
103C	3551JJ1015B	Cover Assembly,Lower	307A	2521JJ8008B	Compressor,Set Assembly
103E	5218JJ3001A	Rail,Slide	308A	6748JJ8005B	Thermistor,PTC
105A	5250JA2009B	Tube,Drain	309A	6750JJ8004B	Overload Protect
105F	5070JJ3002A	Skirt,Lower	310A	3550JJ8003A	Cover,PTC
106A	4779JA2003A	Leg Assembly,Adjust	312A	5040JA3031A	Damper,Compressor
106B	4J00382C	Washer,Common	314A	4620JA3009A	Stopper,Compressor
120B	5209JJ1002A	Duct Assembly,Multi	315A	3103JJ1001J	Base Assembly,Compressor
125D	4930JJ3007A	Holder,Bracket	317A	5851JJ2002F	Drier Assembly
128A	4975JJ2002A	Guide Assembly,Rail	318A	4930JA3034A	Holder,Drier
128B	4975JJ2002B	Guide Assembly,Rail	319A	3390JJ0004A	Tray,Drip
128E	4930JJ1012A	Holder,Rail	319C	MEA41997401	Guide,Fan
128F	4930JJ1012B	Holder,Rail	319E	4810JJ2005A	Bracket,Motor
131A	5074JJ1017A	Bucket,Ice	323B	5403JJ1007A	Condenser Assembly,Wire
135C	3550JJ2030A	Cover,Grille Fan	327A	5006JA3034A	Cap,Drain Tube
136C	3390JJ1057A	Tray,Drawer	328A	4J03020A	Damper,Pipe
140B	5027JJ2007B	Shelf Assembly,Refrigerator	329A	5901JJ1005A	Fan Assembly
140D	MHL38615403	Shelf,Net	329C	ADP36665702	Fan Assembly
140E	MHL38615404	Shelf,Net	332A	3531JJ1004A	Grille Assembly,Fan
142D	5026JJ2001L	Shelf,Net	401A	6615JB2005C	Controller Assembly
142E	5026JJ2001M	Shelf,Net	404A	4681JK1004A	AC Motor
143E	5027JJ1008K	Shelf Assembly,Refrigerator	405A	4811JJ2002A	Bracket Assembly,Motor
143F	5027JJ1008D	Shelf Assembly,Refrigerator	405B	5040JJ2001A	Damper,Motor Support
145A	4930JJ2003A	Holder,Shelf	405C	5040JA2009B	Damper,Motor Support
145B	4930JJ2004A	Holder,Shelf	405F	5040JA2004B	Damper,Motor Support
149A	5026JJ1026A	SHELF,FREEZER	405G	4811JJ2002H	Bracket Assembly,Motor
151A	3391JJ1020C	Tray Assembly,Vegetable	406B	6600JB1004A	Switch,Push Button
151C	4940JJ2003C	KNOB,SHUTTER	409B	6912JB2004M	Lamp,Incandescent
154A	3550JL1006C	Cover,TV	409D	3034JJ1002B	Reflector,Lamp
155B	4981JJ2001B	Supporter Assembly,Cover TV	410A	6621JK2002D	Drawing,Assembly
158A	3550JJ1040A	Cover,Lamp	410G	0CZZJB2012J	Capacitor,Electric Appliance Film,Box
158E	MCK30060901	Cover,Lamp	411A	6411JK1006A	Power Cord Assembly
167B	4890JL1002H	Shelf,Glass	412D	6877JK2011B	Drawing,Assembly
170A	3391JJ2004H	Tray Assembly,Meat	418A	5300JB1100J	Heater,Sheath
200A	3581JJ8020V	Door Assembly,Freezer	420A	4681JB1029J	Motor,DC
201A	ADD55827501	Door Foam Assembly,Freezer	501A	EBR41531303	PCB Assembly,Main
203A	4987JJ1004A	Gasket Assembly,Door	501F	3551JJ1020A	Cover Assembly,PCB
205D	5004JJ1040A	Basket,Door	503C	6871JB2047A	PCB Assembly,Display
212A	AED37133111	Handle Assembly,Freezer	503D	3110JJ1005A	Case,Display
212G	3846JD1007F	Name Plate	503E	3550JJ2031A	Cover,Display
230A	3581JJ8047G	Door Assembly,Refrigerator	503F	ABQ33905301	Case Assembly,Display
231A	ADD30931302	Door Foam Assembly,Refrigerator	503G	3806JL1049A	Decor,Control
233A	4987JJ1004B	Gasket Assembly,Door	600A	5989JA0002N	Ice Maker Assembly,Kit
241A	3550JL2003H	Cover,Tray	600C	MEA32865501	Guide,Tube
241B	5004JJ1021A	Basket,Door	602A	4931JA3005B	Holder Assembly,Bracket
241C	5005JJ2017A	Basket Assembly,Door	610A	3550JJ2020A	Cover,Sensor
241D	5005JJ2020A	Basket Assembly,Door	616E	5211JA2003B	Tube Assembly,Inject
241E	5005JJ2018A	Basket Assembly,Door	618A	5210JJ3006B	Tube,Inject
243A	4620JJ3006A	Stopper,Door	619A	5220JA2009D	Valve,Water
244A	AED37082903	Handle Assembly,Refrigerator	619B	3550JJ2024A	Cover,Valve
244E	5006JJ3016A	Cap,Handle	619C	AJU55759301	Valve Assembly,Water
262D	4004JA3002A	Clip	622B	MJH36429401	Supporter,Tube Guide
281A	3550JJ2013A	Cover,Hinge	623A	4770JA3001A	Band
281B	4775JJ2003B	Hinge Assembly,Upper	627A	4930JA3054A	Holder,Pipe
281E	5006JJ3014A	Cap,Hinge	903A	3550JJ0006A	Cover,Lower
282B	4775JJ8002F	Hinge Assembly,Center	903B	4930JJ2021A	Holder,Cover(Lower)
282C	1PZZJJ3002F	Pin,Common	903D	6500JK1003A	Sensor
282E	5006JJ2001A	Cap,Hinge	903E	6500JK1004A	Sensor
282F	3806JL2006F	Decor,Duct	B01	1STZJA3004F	Screw,Customized
282H	5006JJ3004A	Cap,Hinge	S01	1SZZJJ3010A	Screw,Customized
283B	4775JJ2007B	Hinge Assembly,Lower	S22	J47100001J	Screw,Customized
283D	4774JJ2002A	Hinge,Lower	S24	1SZZJA3011B	Screw,Customized
283F	MJB36873201	Stopper,Door	S27	4J01424C	Screw,Customized
284D	1STZJA3004K	Screw,Customized	S28	1SZZJJ3005E	Screw,Customized
286A	4984JJ3003A	BUSH	S29	4J00415D	Screw,Customized
301A	5421JJ1001B	Evaporator Assembly	S31	4000W4A003A	Screw,Customized
304A	3551JJ2008B	Cover Assembly,Machinery(Rear)	S38	4J00415D	Screw,Customized



MFL49482602

March, 2008