

This Owner's Manual is provided and hosted by Appliance Factory Parts.



Coleman 2000002866 Owner's Manual

[Shop genuine replacement parts for Coleman
2000002866](#)



[Find Your Coleman Camping Parts - Select From 855 Models](#)

----- Manual continues below -----

WARNINGS:

- Never leave pump unattended while in use.
- Carefully inspect the pump for damage before first use and every use thereafter.
Do not use if found damaged.
- Do not change pump in any way.
- Keep pump out of reach of children.
- Do not use in or around water.
- Do not open case, electrical hazards may result. There are no user serviceable parts.
- Do not attempt to put any objects into the inflation or deflation port at any time.
- Never allow paper, debris or small articles to be sucked into pump while operating.
- Do not let your airbed come in contact with sharp, pointed objects.
- Do not use or place near heaters, open flame or other hot objects.
- For indoor use only.

TROUBLESHOOTING

If your product seems to be leaking air, ensure that the Double Lock™ Valve is properly closed. Valve should appear depressed into itself when properly closed. Make sure the valve is sealed around the internal stopper before closing the cap. Do this by pressing in on the valve before closing the cap.

CLEANING

CAUTION: Before cleaning any area of this product (pump or bed) make sure the pump is unplugged from an electrical outlet.

AIRBED


Airbed itself may be cleaned using a mild soap and water. Do not use strong chemicals or detergents. Allow your bed to completely dry before storing.

IMPORTANT SAFETY INSTRUCTIONS:

- **READ AND SAVE THESE INSTRUCTIONS.**
- This appliance has a polarized plug (one blade is wider than the other). To reduce the risk of electric shock, this plug is intended to fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Do not attempt to defeat this safety feature.
- Unplug or disconnect the appliance from the power supply before servicing.
- **WARNING - To Reduce The Risk Of Fire Or Electric Shock, Do Not Use This Fan With Any Solid-State Speed Control Device.**
- Do not operate any fan with a damaged cord or plug. Discard fan or return to an authorized service facility for examination and/or repair.
- Do not run cord under carpeting. Do not cover cord with throw rugs, runners, or similar coverings. Arrange cord away from traffic area where it will not be tripped over.
- **DO NOT BLOCK THE AIR VENTS DURING OPERATION, THIS COULD DAMAGE THE MOTOR.**

GROUNDING INSTRUCTIONS (IF APPLICABLE):

This pump should be grounded while in use to protect the operator from electric shock. The pump is equipped with a 3-conductor cord and 3-prong grounding type plug to fit the proper grounding type receptacle. The green (or green and yellow) conductor in the cord is the grounding wire. Never connect the green (or green and yellow) wire to a live terminal. This pump is for use on less than 150V, and has a plug that looks like that shown in sketch (A). An adapter, see sketch (B), is available for connecting sketch (A) type plugs to 2-prong receptacles. The green colored rigid ear, lug, or the like, extending from the adapter must be connected to a permanent ground, such as a properly grounded outlet box.

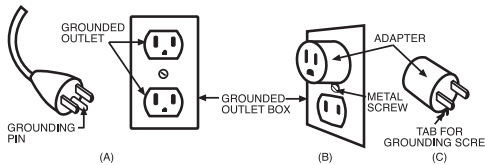

EXTENSION CORDS:

Make sure your extension cord is in good condition. When using an extension cord, be sure to use one heavy enough to carry the current your product will draw. An undersized cord will cause a drop in the line voltage resulting in loss of power and overheating. The following table shows the correct size to use depending on cord length and nameplate ampere rating. If in doubt, use the next heavier gage. The smaller the gage number, the heavier the cord.

Volts 120V	Total length of cord in feet				
	0-25'	26'-50'	51'-100'	101'-150'	
Ampere rating		AWG			
More Than	Not More Than				
0-6		18	16	16	14
5-10		18	16	14	12
10-12		16	16	14	12
12-16		14	12	Not recommended	

Please call or write us with any comments or questions

For products purchased in the United States:
The Coleman Company, Inc.
3600 North Hydraulic
Wichita, KS 67219 U.S.A.
1-800-835-3278 • TDD: 1-316-832-8707

For products purchased in Canada:
Sunbeam Corporation (Canada) Limited
DBA Jarden Consumer Solutions
20B Hereford Street
Brampton ON L6Y 0M1
1-800-387-6161

www.coleman.com

Manufactured in China

Coleman, , , and Quickbed® are registered trademarks and Double Lock™ is a trademark of The Coleman Company, Inc.



How to Use and Enjoy Your Coleman®


Quickbed® Airbed with Built-in Electric Pump




Inflation/Deflation Instructions

1. Position Airbed

- Unroll and layout airbed in position.
- Close secondary valve as shown in Double Lock™ Valve Operation.




Control dial in OFF position

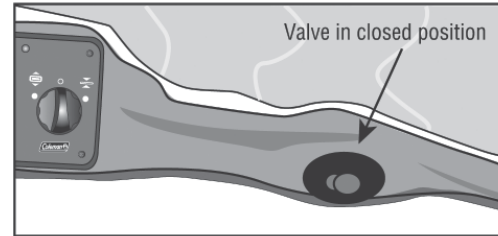


2. Inflate Airbed

- Connect pump to power source.
- Turn control dial to INFLATE and begin inflation. When bed is fully inflated, turn dial to OFF position
- To adjust firmness briefly turn control dial:
 DEFLATE decreases firmness
 INFLATE increases firmness




Turn Control dial to INFLATE position

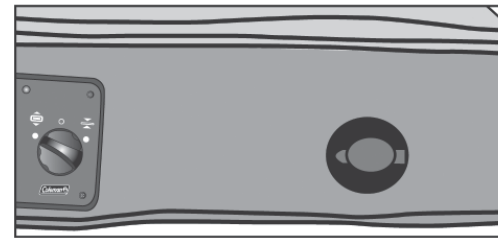


3. Deflate Airbed

- Turn the control dial to DEFLATE.
- For storage, fold the bed and roll it up to store in carry bag.




Turn Control dial to DEFLATE position

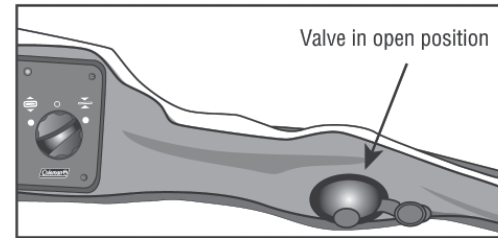

Double Lock™ Valve Operation

TO OPEN:


STEP 1:



Internal Seal Closed

Pull Open Cap

STEP 2:

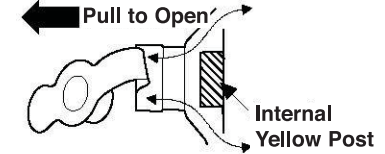


Fully Opened Valve

Firmly pull cap to unseat valve from inner yellow post.

TO CLOSE:

Push to Close



Internal Seal Closed

Reverse Steps 1 & 2. Make sure valve seats on inner yellow post.



Fully Closed Valve

Close Cap